

VINYL SHEET

CATALOGUE



Call us now
9632 0750



Bartley Biz Centre
Blk 15 Kaki Bukit Rd 4, #01-44,
S 417808



david@ezzogenics.com
admin@ezzogenics.com



www.ezzogenics.com
www.woodfloor.com.sg

子 Zi series


Comercial Homogeneous Vinyl



Product Features

- 1 High-quality multifunctional homogeneous permeable floor
- 2 The product pattern is non-directional, and the decorative effect is more flexible and diverse
- 3 Special surface treatment process, no waxing is required, and maintenance is more convenient
- 4 High strength and wear resistance, so that the floor has good anti-fouling and anti-scratch properties
- 5 The product has a special formula and has antibacterial and antifungal effects

PUR enhanced treatment

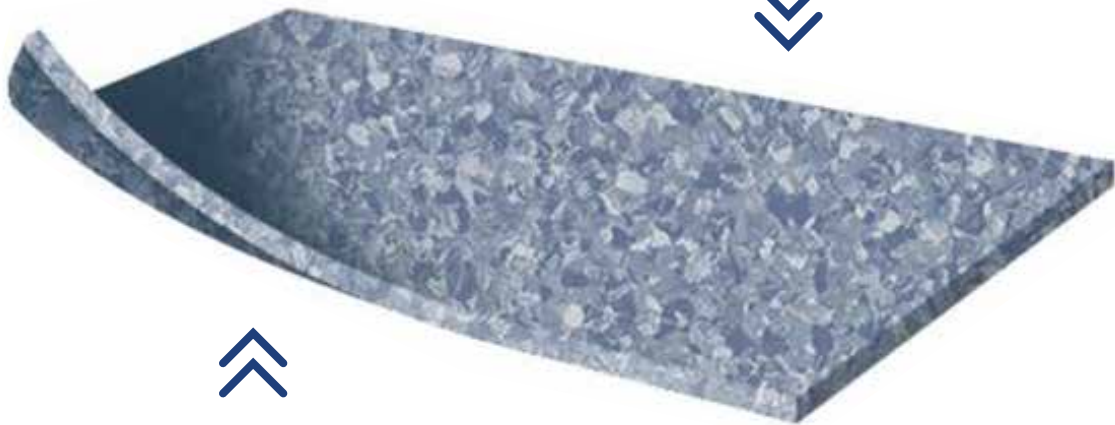


Homogeneous permeable structure

子 Zi series

Product Specifications

Test Items	Standard	Unit	Result
Thickness in total	ISO24346-EN 428	mm	2
Weight	ISO23997-EN 430	g/m ²	2850
Width	ISO24341-EN 426	m	2
Length	ISO24341-EN 426	m	20
Fire resistance	GB 8624		B ₁ S1.t0 level
Electrical resistance	EN 1815	kv	≤2
Slip resistance dry	EN 13893		≥0.3
Slip resistance wet	DIN 51130		R9
Abrasion group	EN 660-2		T- rated
Abrasion resistance	EN 660-2	mm ³	≤2
Castor chair resistance	EN 425		Pass Suitable
Residual indentation	EN 433	mm	≤0.1
Colour fastness	ISO 105-B02	classic	≥6
Thermal conductivity	EN 12267	w/m.k	0.078
Dimensional stability	ISO 23999-EN434	%	≤0.4
Curling	EN 434	mm	≤8
Chemical products resistance	EN 423		Index: 0 Not affected
Toxic testing	GB 18586		Pass Suitable
Formaldehyde emission	EN 717-1		N.D not detected
Anti-bacterial	ISO 22196		Anti bacterial rate I
Sound-absorbing	EN ISO 717/2		About +4dB

子 Zi series

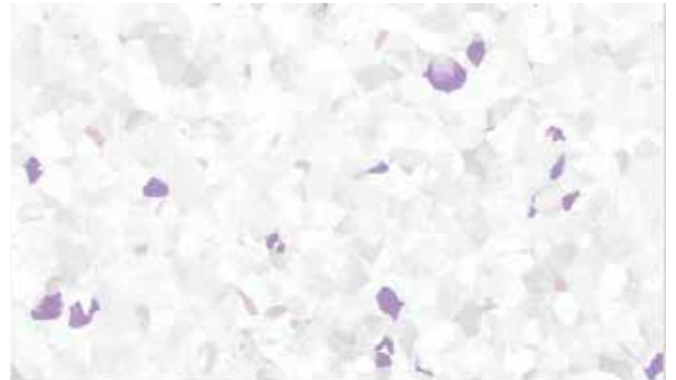

EZ-ZS1514



EZ-ZS1510



EZ-ZS1511



EZ-ZS1512



EZ-ZS1513

子 Zi series



EZ-ZS1515



EZ-ZS1516



EZ-ZS1517



EZ-ZS1501



EZ-ZS1518



EZ-ZS1520



EZ-ZS1503


子 Zi series



LP-ZS1508




LP-ZS1504

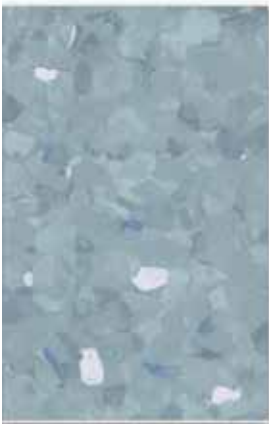

LP-ZS1507



LP-ZS1505

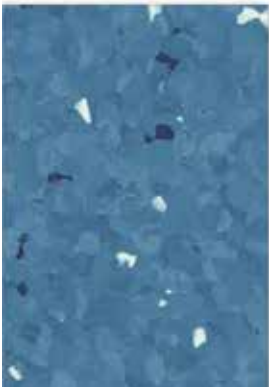

EZ-ZS1509



EZ-ZS1506



通优 Ripple series


Commercial Homogeneous Vinyl



Product Features

- 1 High Performing flexible homogeneous multipurpose flooring
- 2 NO directional design, The decorative effect is more flexible
- 3 Densely compacted surface for improved mar-resistance and Anti pollution performance
- 4 Special maintenance treatment; ease of maintenance
- 5 Special formulation for improved anti-bacterial and anti-mildew

PUR special maintenance treatment

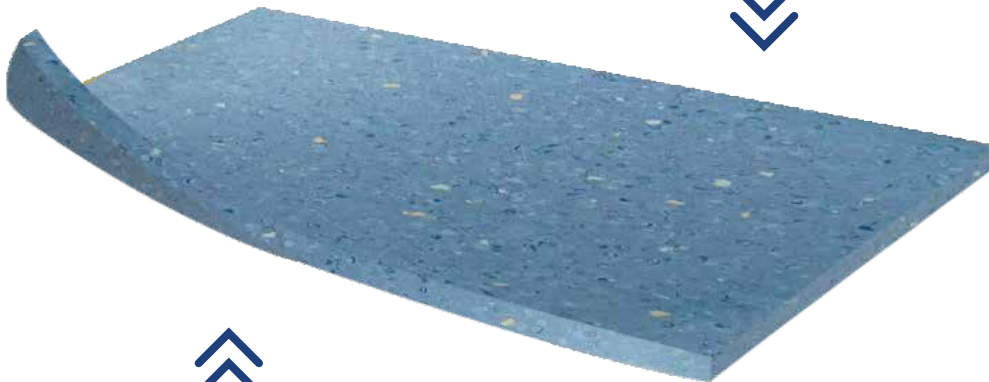



Compacted Homogeneous floor covering

通优 Ripple series


Product Specifications

Test Items	Standard	Unit	Result
Thickness in total	ISO24346-EN 428	mm	2
Weight	ISO23997-EN 430	g/m ²	2850
Width	ISO24341-EN 426	m	2
Length	ISO24341-EN 426	m	20
Fire resistance	GB 8624		B ₁ S1.t0 level
Electrical resistance	EN 1815	kv	≤2
Slip resistance dry	EN 13893		≥0.3
Slip resistance wet	DIN 51130		R9
Abrasion group	EN 660-2		T- rated
Abrasion resistance	EN 660-2	mm ³	≤2
Castor chair resistance	EN 425		Pass Suitable
Residual indentation	EN 433	mm	≤0.1
Colour fastness	ISO 105-B02	classic	≥6
Thermal conductivity	EN 12267	w/m.k	0.078
Dimensional stability	ISO 23999-EN434	%	≤0.4
Curling	EN 434	mm	≤8
Chemical products resistance	EN 423		Index: 0 Not affected
Toxic testing	GB 18586		Pass Suitable
Formaldehyde emission	EN 717-1		N.D not detected
Anti-bacterial	ISO 22196		Anti bacterial rate I
Sound-absorbing	EN ISO 717/2		About +4dB

通优 Ripple series

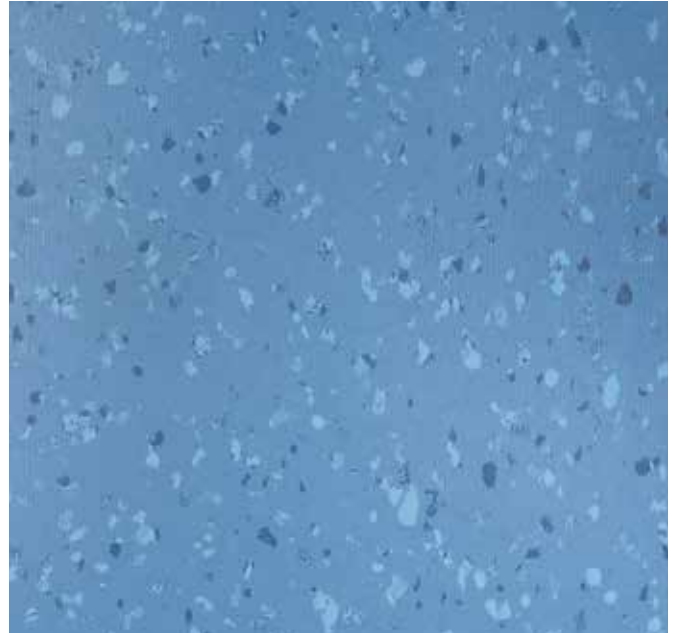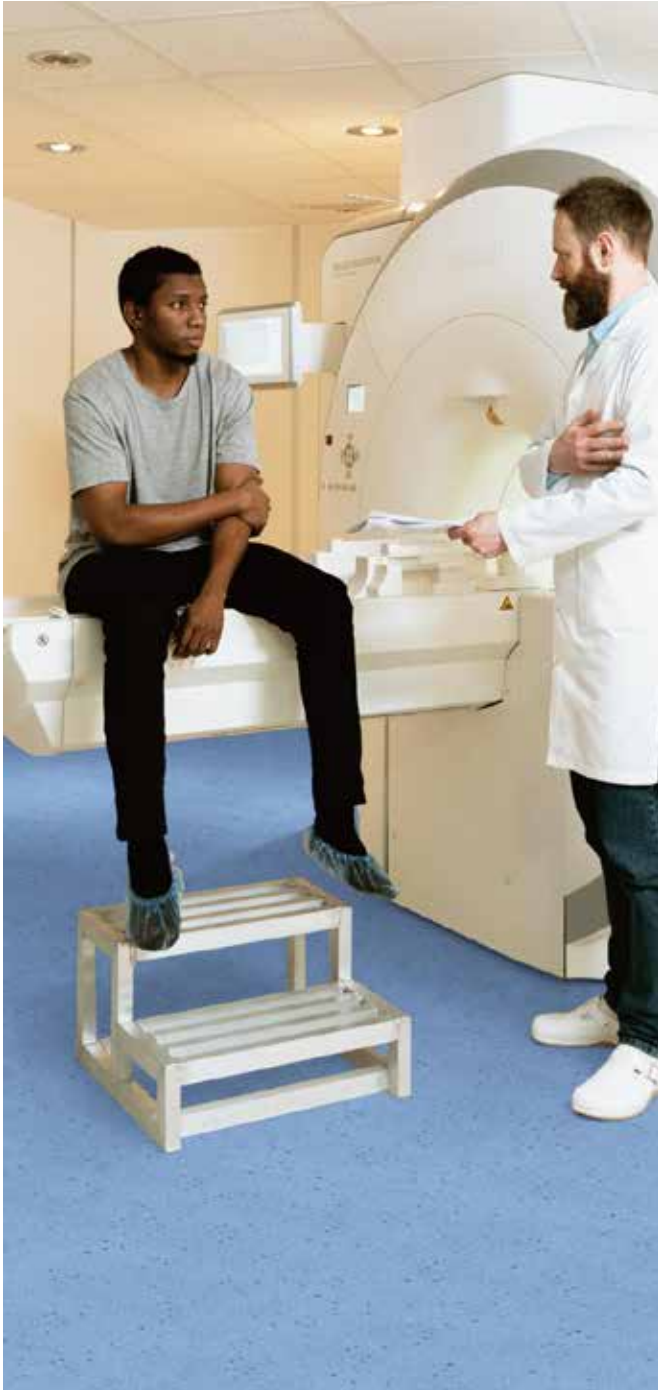

EZ-TU1501

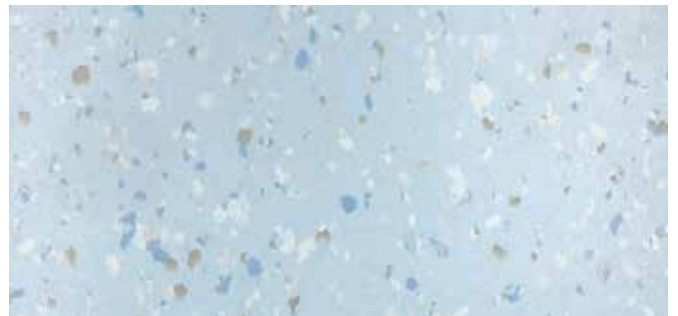


EZ-TU1502




EZ-TU1503

通优 Ripple series

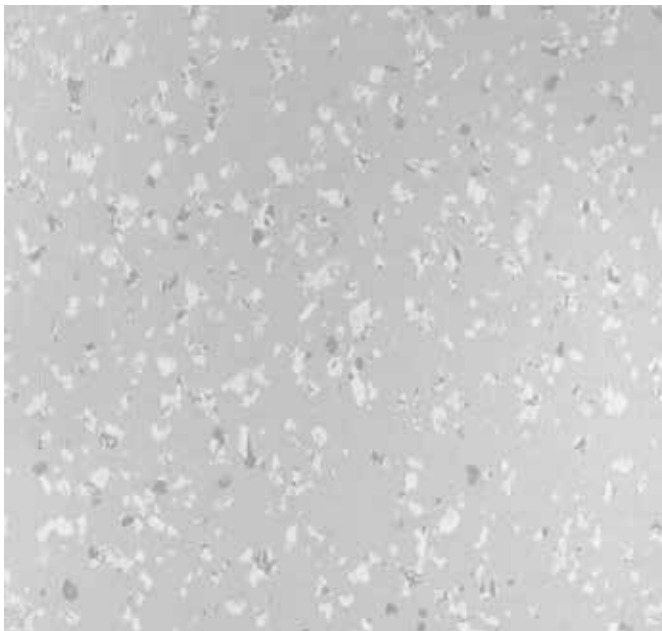

EZ-TU1504

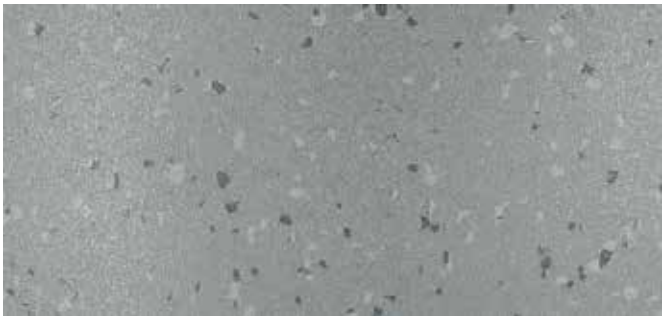


EZ-TU1507




EZ-TU1506



EZ-TU1505



EZ-TU1508



EZ-TU1509




通优 Ripple series




EZ-TU1511






EZ-TU1512



EZ-TU1513



EZ-TU1514

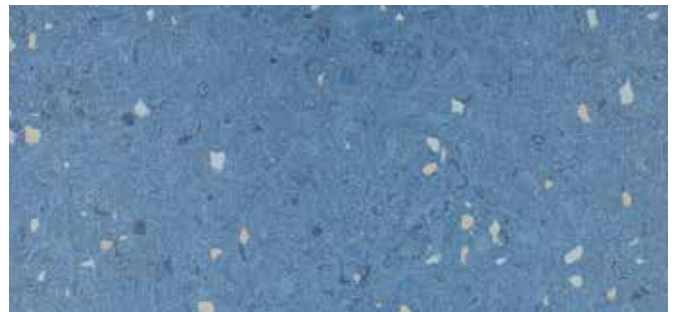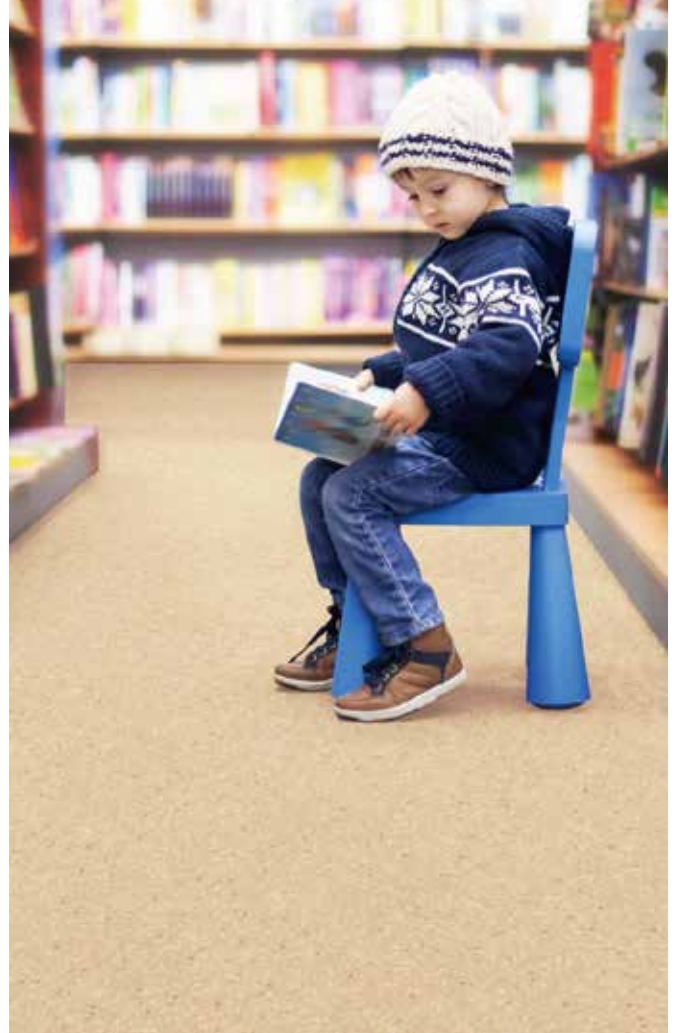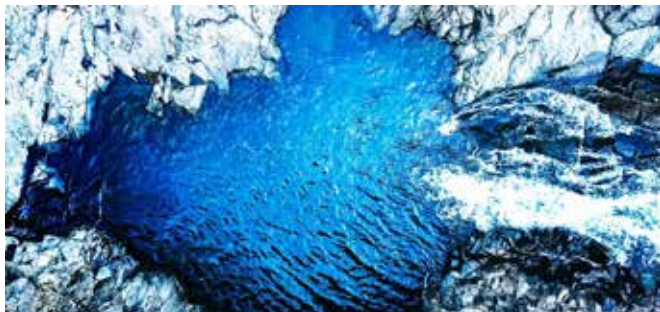

EZ-TU1515


通优 Ripple series




EZ-TU1516



EZ-TU1517



EZ-TU1518



EZ-TU1519



Ǝ - Gān series

Commercial Homogeneous Vinyl



Product Features

- 1 High Performing flexible homogeneous multipurpose flooring
- 2 NO directional design, The decorative effect is more flexible
- 3 Densely compacted surface for improved mar-resistance and Anti pollution performance
- 4 Special maintenance treatment; ease of maintenance
- 5 Special formulation for improved anti-bacterial and anti-mildew

PUR special maintenance treatment



Compacted Homogeneous floor covering

Ǝ - Gān series

Product Specifications

Test Items	Standard	Unit	Result
Thickness in total	ISO24346-EN 428	mm	2
Weight	ISO23997-EN 430	g/m ²	2850
Width	ISO24341-EN 426	m	2
Length	ISO24341-EN 426	m	20
Fire resistance	GB 8624		B ₁ S1, t0 level
Electrical resistance	EN 1815	kv	≤2
Slip resistance dry	EN 13893		≥0.3
Slip resistance wet	DIN 51130		R9
Abrasion group	EN 660-2		T- rated
Abrasion resistance	EN 660-2	mm ³	≤2
Castor chair resistance	EN 425		Pass Suitable
Residual indentation	EN 433	mm	≤0.1
Colour fastness	ISO 105-B02	classic	≥6
Thermal conductivity	EN 12267	w/m.k	0.078
Dimensional stability	ISO 23999-EN434	%	≤0.4
Curling	EN 434	mm	≤8
Chemical products resistance	EN 423		Index: 0 Not affected
Toxic testing	GB 18586		Pass Suitable
Formaldehyde emission	EN 717-1		N.D not detected
Anti-bacterial	ISO 22196		Anti bacterial rate I
Sound-absorbing	EN ISO 717/2		About +4dB

干 - Gān series




EZ-TJ1101



EZ-TJ1105





EZ-TJ1102

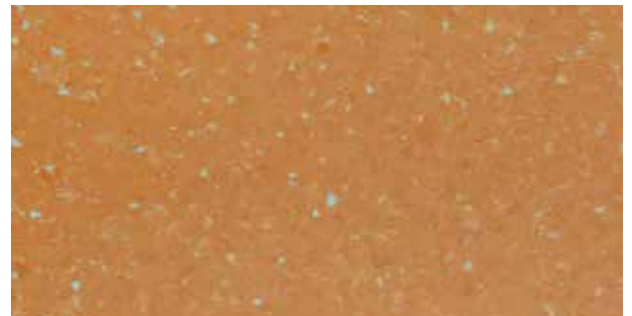

EZ-TJ1106



EZ-TJ1103

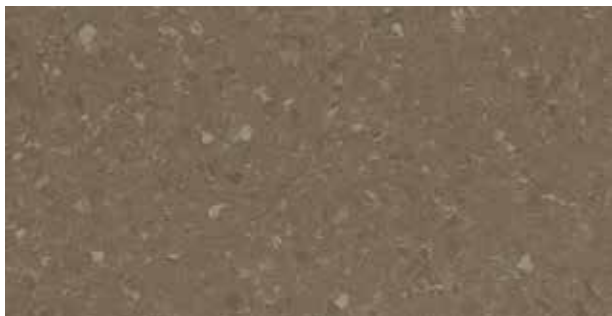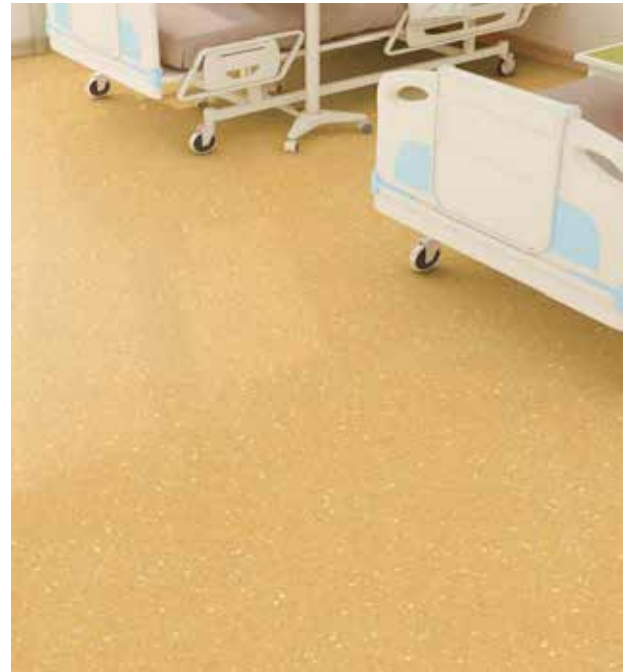


EZ-TJ1104


干 - Gān series




EZ-TJ1107

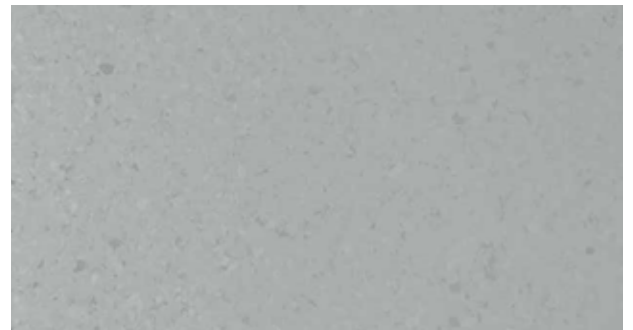

EZ-TJ1108

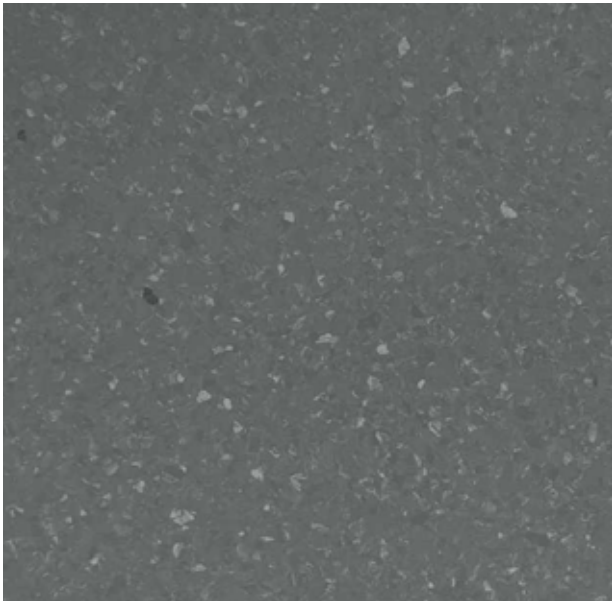

EZ-TJ1109

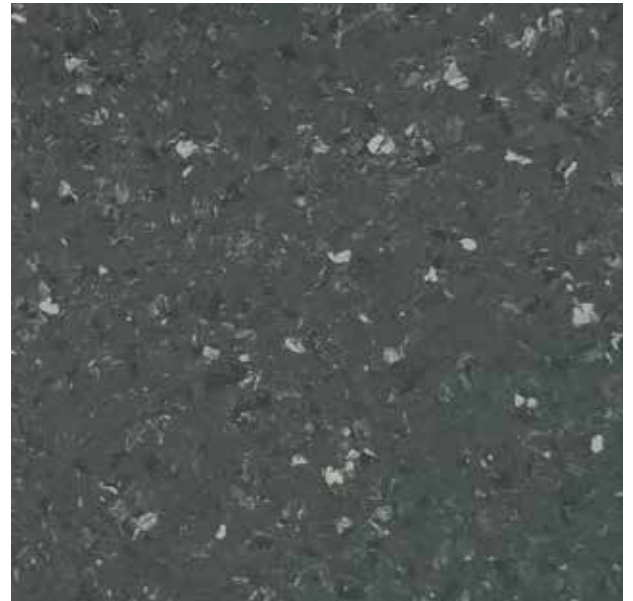

EZ-TJ1110

干 - Gān series



EZ-TJ1111



EZ-TJ1115



EZ-TJ1112



EZ-TJ1116



EZ-TJ1113



EZ-TJ1114



通野 Crylite series

Commercial Homogeneous Vinyl



Product Features

- ① High Performing flexible homogeneous multipurpose flooring
- ② NO directional design, The decorative effect is more flexible
- ③ Densely compacted surface for improved mar-resistance and Anti pollution performance
- ④ Special maintenance treatment; ease of maintenance
- ⑤ Special formulation for improved anti-bacterial and anti-mildew

PUR special maintenance treatment



Compacted Homogeneous floor covering

通野 Crylite series

Product Specifications

Test Items	Standard	Unit	Result
Thickness in total	ISO24346-EN 428	mm	2
Weight	ISO23997-EN 430	g/m ²	2850
Width	ISO24341-EN 426	m	2
Length	ISO24341-EN 426	m	20
Fire resistance	GB 8624		B ₁ S1.t0 level
Electrical resistance	EN 1815	kv	≤2
Slip resistance dry	EN 13893		≥0.3
Slip resistance wet	DIN 51130		R9
Abrasion group	EN 660-2		T- rated
Abrasion resistance	EN 660-2	mm ³	≤2
Castor chair resistance	EN 425		Pass Suitable
Residual indentation	EN 433	mm	≤0.1
Colour fastness	ISO 105-B02	classic	≥6
Thermal conductivity	EN 12267	w/m.k	0.078
Dimensional stability	ISO 23999-EN434	%	≤0.4
Curling	EN 434	mm	≤8
Chemical products resistance	EN 423		Index: 0 Not affected
Toxic testing	GB 18586		Pass Suitable
Formaldehyde emission	EN 717-1		N.D not detected
Anti-bacterial	ISO 22196		Anti bacterial rate I
Sound-absorbing	EN ISO 717/2		About +4dB

通野 Cryilite series



EZ-CR2101



EZ-CR2103




EZ-CR2107



EZ-CR2102




EZ-CR2108

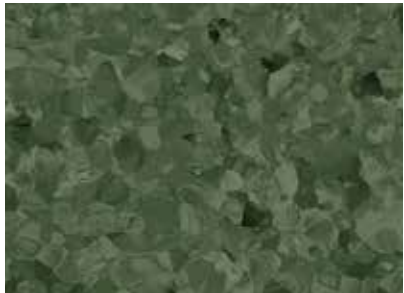


EZ-CR2109



EZ-CR2104

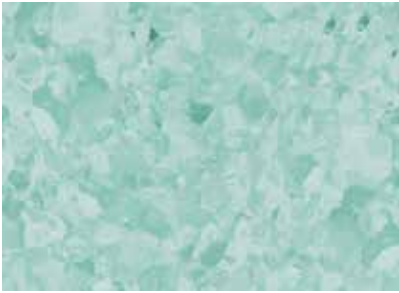

EZ-CR2105

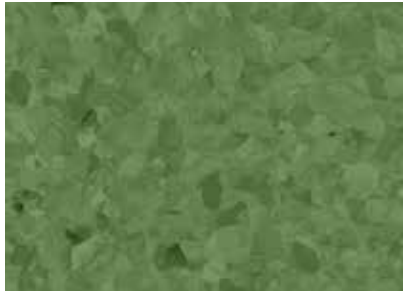

EZ-CR2106

通野 Crylite series




EZ-CR2110




EZ-CR2116



EZ-CR2111

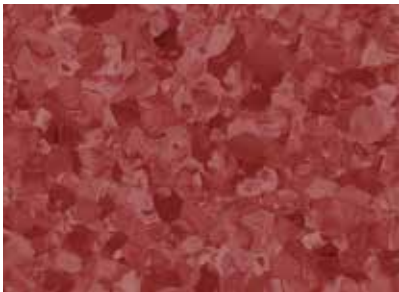

EZ-CR2117

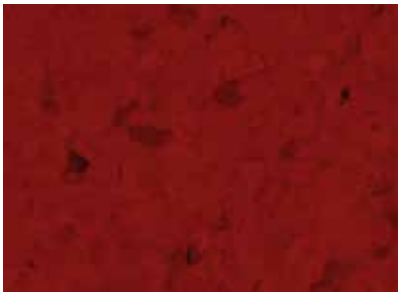

EZ-CR2118




EZ-CR2112



EZ-CR2113



EZ-CR2114

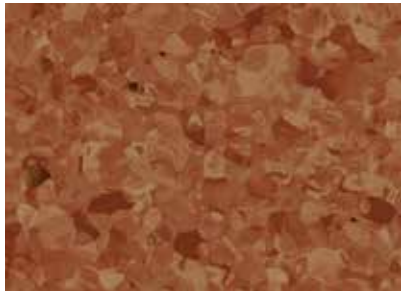

EZ-CR2115

通野 Cryilite series



EZ-CR2119




EZ-CR2127




EZ-CR2121



EZ-CR2120

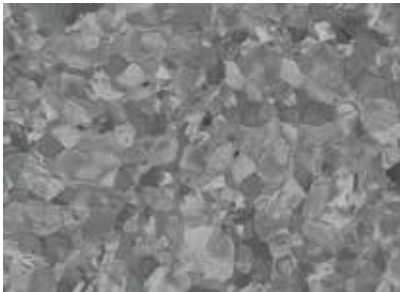


EZ-CR2125

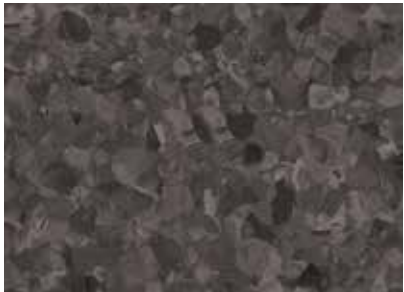

EZ-CR2126



EZ-CR2122

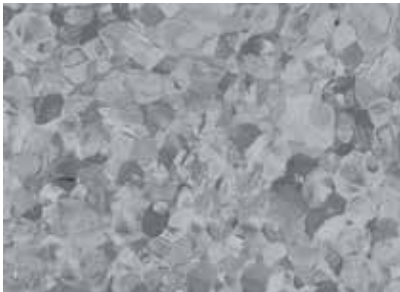

EZ-CR2123




EZ-CR2124

通野 Cryilite series



EZ-CR2128

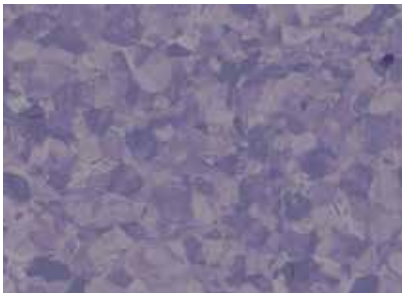


EZ-CR2135




EZ-CR2133



EZ-CR2134

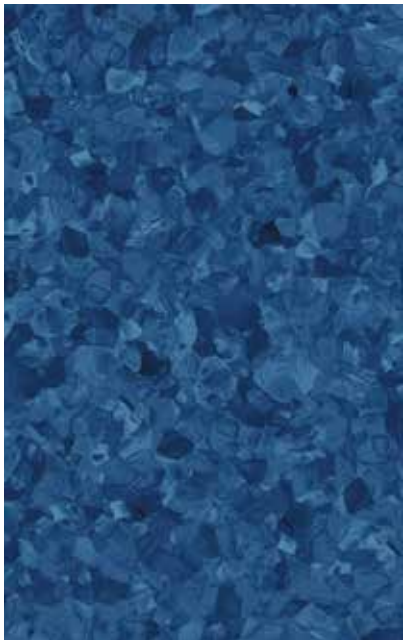

EZ-CR2129

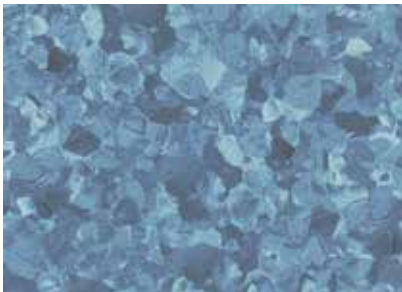

EZ-CR2130



EZ-CR2131



EZ-CR2132