

EZZOGENICS
construction solutions

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

LED LANDSCAPE & ARCHITECTURAL LIGHTING

www.ezzogenics.com

Showroom: Bartley Biz Centre, Blk 15 Kaki Bukit Rd 4, #01-44, S 417808

Tel: 69683098 / 87583098 / 6968 3098 Email: david@ezzogenics.com, admin@ezzogenics.com

LIGHT DISTRIBUTION

Ezzolights provides a wide variety of optical light distributions suitable for all architectural, roadway and area lighting applications, for example, VN: very narrow, N: narrow beam, M: medium beam, W: wide beam, VW: very wide beam: E: elliptical beam, plus Type II, III, IV and ME classification from IESNA/EN.




Distribution Type I (T1)

Type I distributes a very lineal shape. It is the optimal choice for applications such as one or two- lane roadways, walkways, paths or sidewalks. With a preferred lateral width of 15 degrees, it is suitable for lighting streets or pathways that have a width of up to 2 times the mounting height.



Distribution Type III (T3)

Ideal for roadways, general parking, and other lighting application. Half-maximum candela trace on the Street side is beyond the 1.75 MH LRL but not beyond the 2.75 MH LRL.

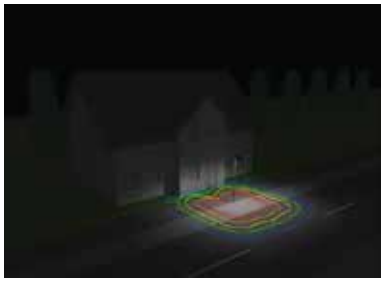


Distribution Type V (T5)

Type V distributes a circular pattern (there is also a Type VS that produces a square distribution with a more defined angle). Having the same distribution at all lateral angles, it is perfect for general area lighting the ideal choice if you are looking to do parking lots or intersections.



Distribution Type II (T2)

Ideal for wider walkways, entrance, roadways, bike paths and other long and narrow lighting application. Intended to be located near the side of a roadway, approximately 1.15 MH. Half-maximum candela trace on the Street side is beyond the 1 MH LRL but not beyond the 1.75 MH LRL.

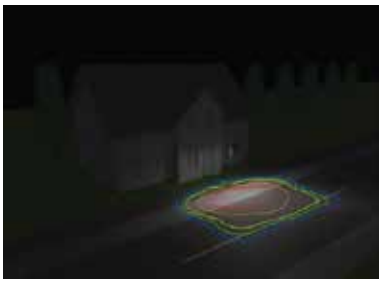

Distribution Type IV (T4)

Especially suited for wall mounting or area applications and for illuminating the perimeter of parking areas. Half-maximum candela trace on the Street side is beyond the 2.75 MH LRLMH LRL.




Distribution Type ME

For motorized vehicles on traffic routes. Some countries apply ME classes from ME1-ME6, with ME1 defining the strictest requirements. For wet road conditions the MEW classes go from MEW1 to MEW6.

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

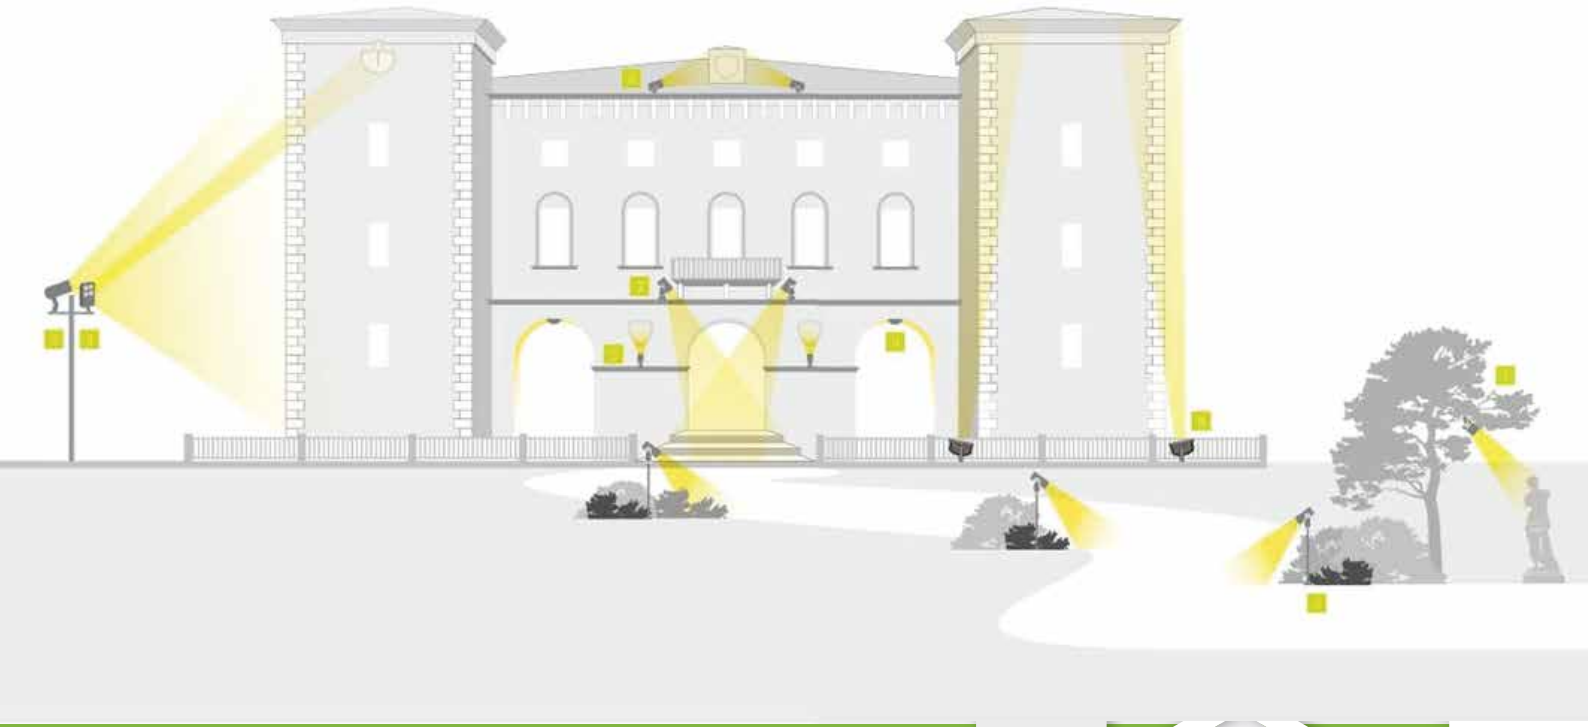

PROJECTORS

FOR OUTDOOR APPLICATIONS

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions



ROSE Pro

ROSE

ROSE Mini


Rose Series Projector




ROSE Mini

EZ-SL 1.0

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

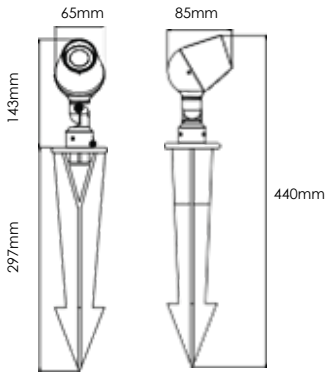

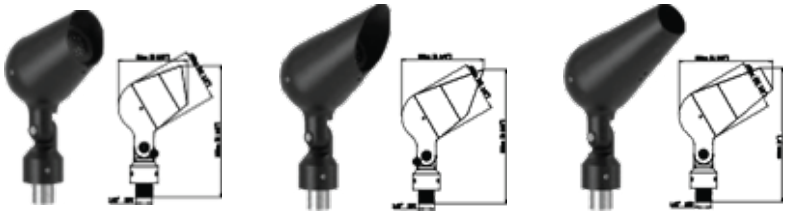

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
3W COB	240.0	80.0	15°
			24°
6W COB	480.0		36°
			60°
8W COB	640.0		40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors

Technical Features

IP66 IK06 CE CB 5 YEARS



Technical Data

Wattage	3/6/8W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	0.35 Kg
Packaging	41*21*41cm(20Pcs) 8.6kg

Option



Standard configuration | Semi sheilded light sheild | Fully sheilded light sheild

OPTICAL ACCESSORIES




Honeycomb louvre built into the lighting fixture




ROSE

EZ-SL 2.0

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

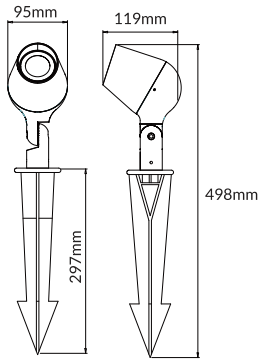





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.0	15°
			24°
15W COB	1440.0		36°
			60°
20W COB	1920.0		40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors


Technical Features

IP66 IK06 CE CB 5 YEARS



Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.1 Kg
Packaging	33*27*31cm(6Pcs) 6.5kg

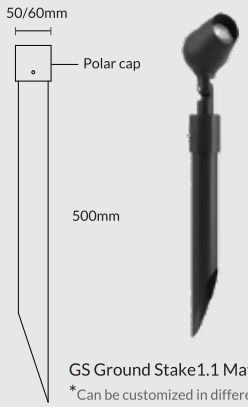

GS Ground Stake1.1 Material: PVC
*Can be customized in different lengths

OPTICAL ACCESSORIES




Honeycomb louvre built into the lighting fixture




ROSE Pro

EZ-SL 3.0

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

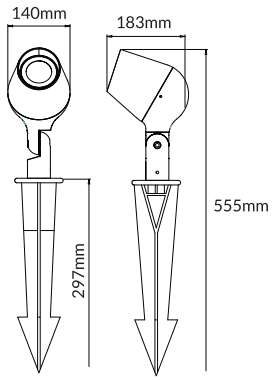





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.0	15°
			24°
40W COB	4000.0		36°
			60°
60W COB	6000.0		40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors


Technical Features

IP66 IK06 CE CB 5 YEARS



Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15Kg
Packaging	32*32*42cm(4Pcs) 8.6kg

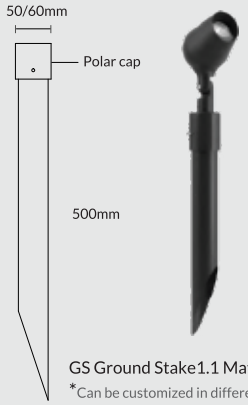

GS Ground Stake1.1 Material: PVC
*Can be customized in different lengths

OPTICAL ACCESSORIES




Honeycomb louvre built into the lighting fixture





ROSE Mini

EZ-SL 1.1

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.







light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
3W COB	240.0	80.0	15°
			24°
6W COB	480.0		36°
			60°
8W COB	640.0		40*70°
2700/4000/5000K CCT available on request			

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors

Technical Features


IP66 IK06 CE CB 5 YEARS




Technical Data

Wattage	3/6/8W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	0.35 Kg
Packaging	41*21*41cm(20Pcs) 8.6kg

Option

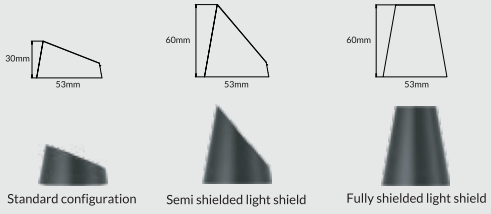

*Different types of light shields can be replaced on site

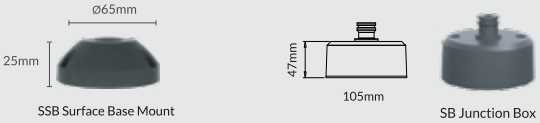





ROSE

EZ-SL 2.1

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.







light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.0	15°
			24°
15W COB	1440.0		36°
			60°
20W COB	1920.0		40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors

Technical Features


IP66 IK06 CE CB 5 YEARS



Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging	33*27*31cm(6Pcs) 6.5kg

Option

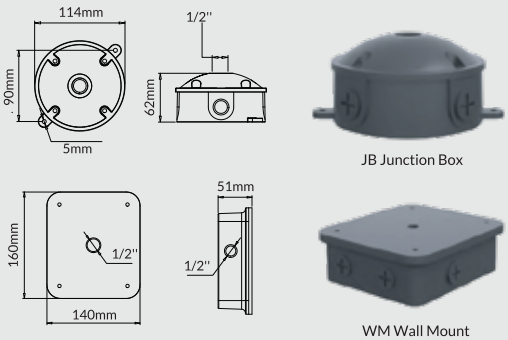

OPTICAL ACCESSORIES



Honeycomb louvre built into the lighting fixture

EZZOLIGHTS


Ezzolights by Ezzogenics | Your Complete Lighting Solutions




ROSE Pro

EZ-SL 3.1

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.







light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.0	15°
			24°
40W COB	4000.0		36°
			60°
60W COB	6000.0		40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors

Technical Features


IP66 IK06 CE CB 5 YEARS



Technical Data


Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15Kg
Packaging	32*32*42cm(4Pcs) 8.6kg


Option





JB Junction Box





WM Wall Mount

OPTICAL ACCESSORIES



Honeycomb louvre built into the lighting fixture




ROSE RGBW

EZ-SL 2.0 RGBW

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
RGBW			
12W COB	396.0	33.00	15° 24° 36° 60° 40*70°

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors

Technical Features


IP66 IK06 CE CB 5 YEARS III



Technical Data

Wattage	12W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>80
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Silicone rubber
Gasket	Electronic power supply(DC24V)
Wireless transmission distance: 30m	
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging	33*27*31cm(6Pcs) 6.5kg

Option

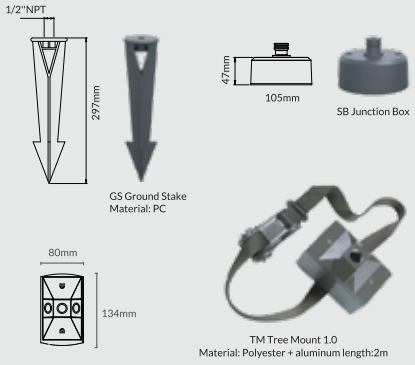




Technical Features

IP66 IK06 CE CB 5 YEARS III

DMX512

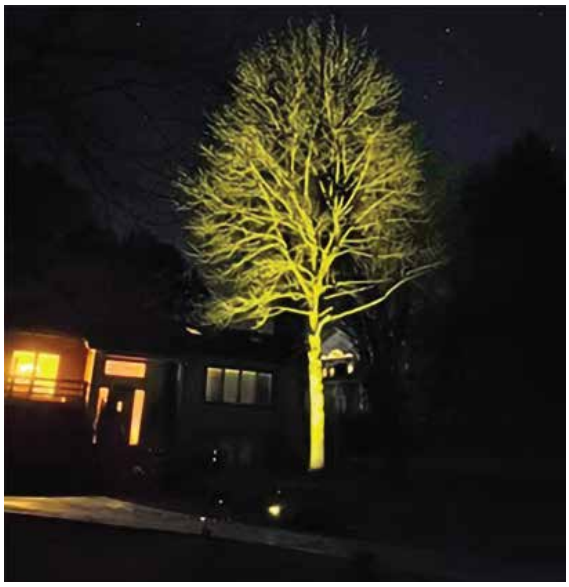


ROSE RGBW

EZ-SL 2.0 RGBW 512

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.






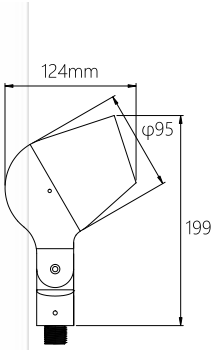

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
RGBW			
12W	396.0	33.00	15° 24° 36° 60° 40*70°

Technical Data

Wattage	12W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	3x 3535LED CRI>80
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Silicone rubber
Gasket	Electronic power supply(DC24V)
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging	33*27*31cm(6Pcs) 6.5kg





JB Junction Box

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019


* Customizable in different finishing colors



Technical Features

IP66 IK06 CE CB 5 YEARS III

DMX512

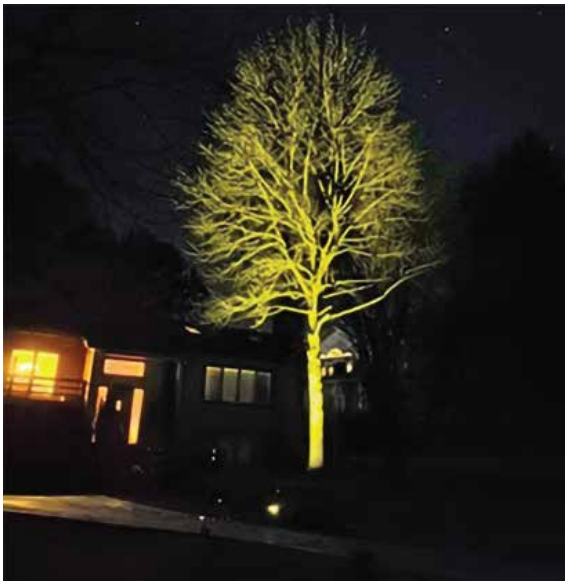


ROSE Pro RGBW

EZ-SL 3.0 RGBW 512

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.








light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
RGBW			
24W	792.0	33.00	15°
			24°
36W	1188.0		36°
			60°
			40*70°

Technical Data

Wattage	24/36W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	8x 3535LED CRI>80
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Silicone rubber
Gasket	Electronic power supply(DC24V)
Power cable	Neoprene cable 5x0.75
Gross weight	2.15 Kg
Packaging	32*32*42cm 4PCS 8.2Kg





JB Junction Box

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019


* Customizable in different finishing colors



ROSE Mini

EZ-SL 1.2

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.



ϕ25mm Extension arm300 mm
Extension pipe length 300 mm made in anodized aluminum.

ϕ25mm Extension arm500 mm
Extension pipe length 600 mm made in anodized aluminum.

ϕ25mm Extension arm1000 mm
Extension pipe length 1000 mm made in anodized aluminum.

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
3W COB	240.0	80.0	15°
			24°
6W COB	480.0		36°
			60°
8W COB	640.0		40*70°
2700/4000/5000K CCT available on request			

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors

Technical Features

IP66 IK06 CE CB 5 YEARS





Technical Data

Wattage	3/6/8W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included

Option

*Different types of light shields can be replaced on site

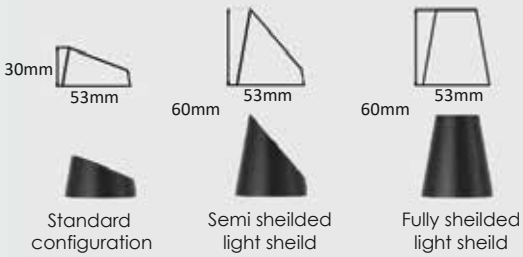

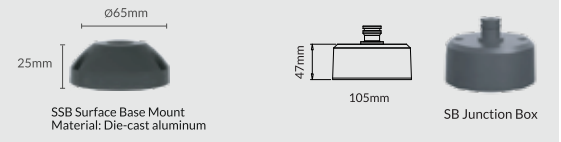





ROSE

EZ-SL 2.2

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.





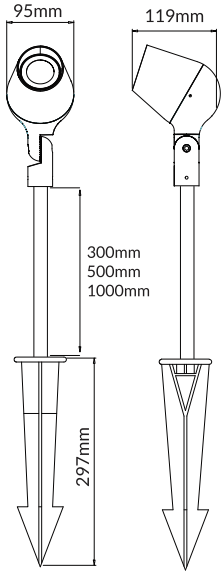

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
			24°
15W COB	1440.0		36°
			60°
20W COB	1920.0		40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors

Technical Features

IP66 IK06 CE CB 5 YEARS


Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Power cables	Neoprene cable 3x0.75
Gross weight	1.2 Kg
Packaging	33*27*31cm(6Pcs) 6.5kg


ϕ25mm Extension arm 300 mm
Extension pipe length 300 mm made in anodized aluminum.

ϕ25mm Extension arm 500 mm
Extension pipe length 600 mm made in anodized aluminum.


ϕ25mm Extension arm 1000 mm
Extension pipe length 900 mm made in anodized aluminum.

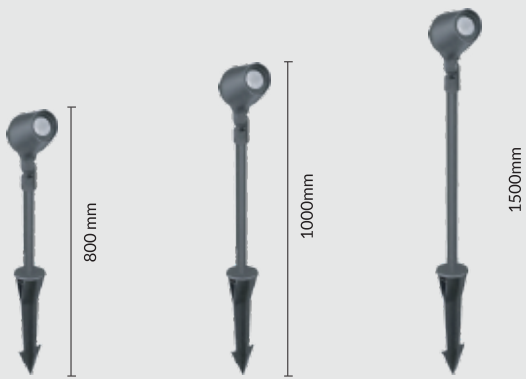

OPTION



JB Junction Box



SB Junction Box





ROSE Pro

EZ-SL 3.2

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.





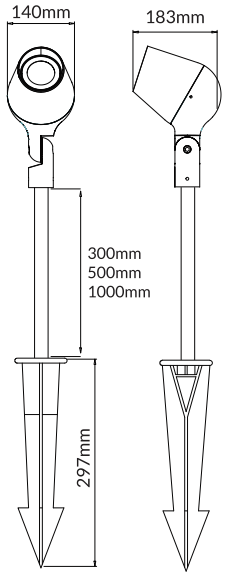

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
			24°
40W COB	4000.0		36°
			60°
60W COB	6000.0		40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors

Technical Features

IP66 | IK06 | CE | CB | 5 YEARS


Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg


ϕ25mm Extension arm 300 mm
Extension pipe length 300 mm made in anodized aluminum.

ϕ25mm Extension arm 500 mm
Extension pipe length 600 mm made in anodized aluminum.

ϕ25mm Extension arm 1000 mm
Extension pipe length 900 mm made in anodized aluminum.

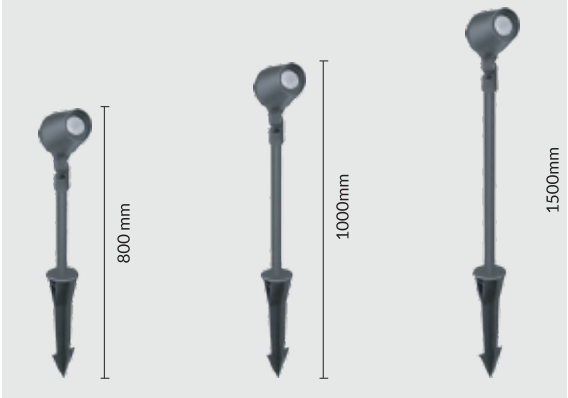

OPTION

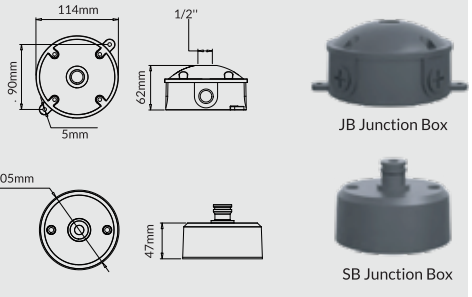




ROSE Mini

EZ-SL 1.3


Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

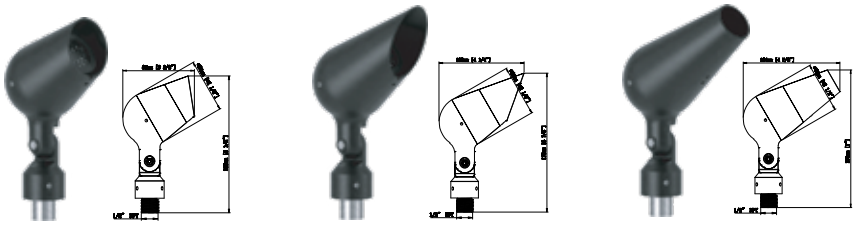

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
3W COB	240.0	80.0	15°
			24°
6W COB	480.0		36°
			60°
8W COB	640.0		40*70°

2700/4000/5000K CCT available on request

Option

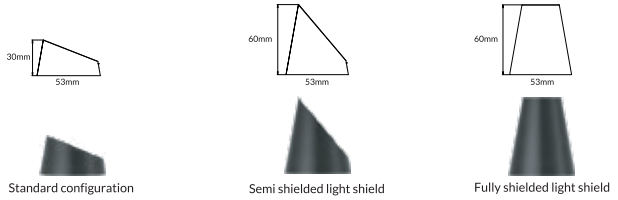

Standard configuration | Semi shielded light shield | Fully shielded light shield

Technical Features


IP66 | IK06 | CE | CB | 5 YEARS



Technical Data


Wattage	3/6/8W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	0.35 Kg
Packaging size	41*21*41cm(20pcs) 8.6kg

OPTION





TM Tree Mount 1.0
Material: Polyester + aluminum length:2m

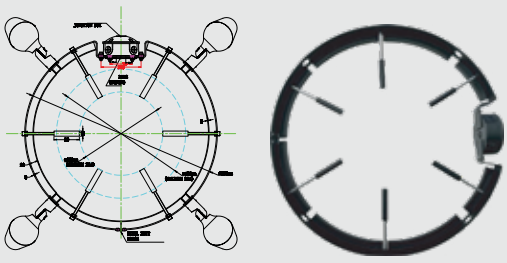

TM Tree Mount 2.0
Material: 304 stainless steel ring + die-casting aluminum waterproof box



Tree Ring Installation


ROSE

EZ-SL 2.3

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.







light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
			24°
15W COB	1440.0		36°
			60°
20W COB	1920.0		40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors.
Different tree ring sizes can be customized according to needs


Technical Features

IP66 | IK06 | CE | CB | 5 YEARS | III

Technical Data


Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

OPTION





TM Tree Mount 1.0
Material: Polyester + aluminum length:2m





TM Tree Mount 2.0
Material: 304 stainless steel ring + die-casting aluminum waterproof box





Tree Ring Installation


ROSE Pro

EZ-SL 3.3

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.







light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	3000.0	100.00	15°
			24°
15W COB	4000.0		36°
			60°
20W COB	6000.0		40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey RAL 9006
- Anthracite Grey RAL 7024
- Matt Black (on request)
- Bronze RAL 8019

* Customizable in different finishing colors

Different tree ring sizes can be customized according to needs


Technical Features

IP66 IK06 CE CB 5 YEARS

Technical Data


Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

OPTION





TM Tree Mount 1.0
Material: Polyester + aluminum length:2m





TM Tree Mount 2.0
Material: 304 stainless steel ring + die-casting aluminum waterproof box







ROSE
EZ-SL 2.4

Luminaire Suitable For Pole Mounting In Single
Or Multiple Combinations





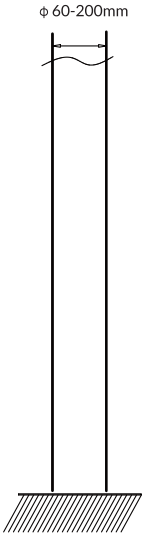

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
			24°
15W COB	1440.0		36°
			60°
20W COB	1920.0		40*70°

2700/4000/5000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

*Can be drilled on-site, ϕ 30mm, flexible combination.

Technical Features


IP66 IK06 CE CB 5 YEARS




Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

OPTION

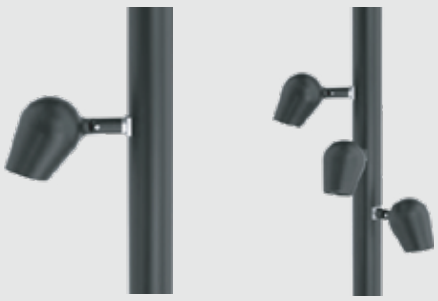



Coupler

Suitable to be used with poles diam. min 60 mm and diam. max 200 mm. Can be positioned on various staggered levels or on a single level, with the same pole. Made in phospho chromatised
and polyester powder coated dia-cast copper-free aluminum material.





ROSE Pro

EZ-SL 3.4

Luminaire Suitable For Pole Mounting In Single
Or Multiple Combinations





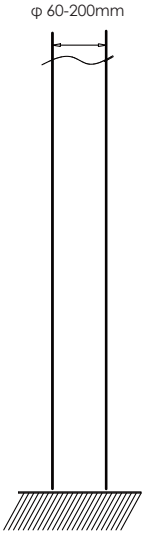

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
40W COB	4000.0		24°
60W COB	6000.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

*Can be drilled on-site φ,30mm, flexible combination.

Technical Features


IP66 IK06 CE CB 5 YEARS



Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

OPTION

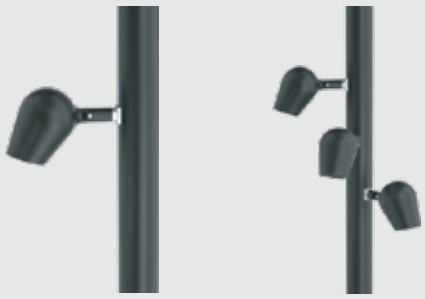



Coupler

Suitable to be used with poles diam. min 60 mm and diam. max 200 mm.
Can be positioned on various staggered levels or on a single level on the same pole. Made in phospho chromatised and polyester powder coated dia-cast copper-free aluminum material.




ROSE

EZ-SL 2.5

Overhead installation







Technical Features

IP66 | IK06 | CE | CB | 5 YEARS




Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
			24°
15W COB	1440.0		36°
			60°
20W COB	1920.0		40*70°

2700/4000/5000K CCT available on request

OPTION

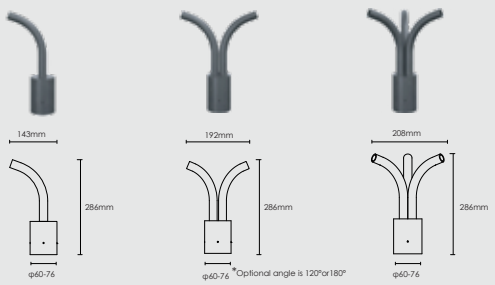

Candlestick
Material: steel
Suitable forφ60-76mm pole

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors




ROSE Pro

EZ-SL 3.5

Overhead installation







Technical Features

IP66 | IK06 | CE | CB | 5 YEARS



Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
			24°
40W COB	4000.0		36°
			60°
60W COB	6000.0		40*70°


2700/4000/5000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

OPTION

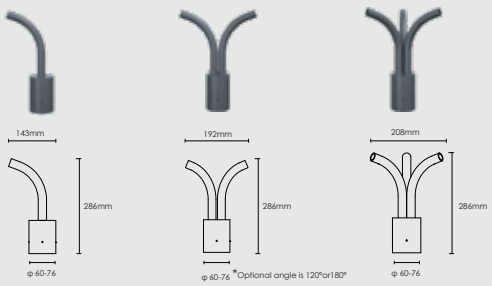

Candlestick

Material: steel
Suitable forφ60-76mm pole




ROSE Pro


EZ-SL 3.6

Flange installation







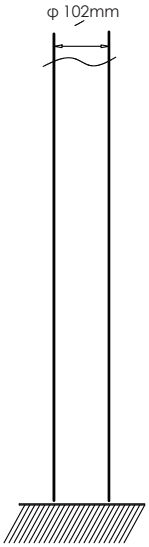

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
			24°
40W COB	4000.0		36°
			60°
60W COB	6000.0		40*70°

2700/4000/5000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP66 | IK06 | CE | CB | 5 YEARS



Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COBCRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

OPTION



Unilateral flange
Material: Die cast aluminum



Bilateral flange








ROSE Pro


EZ-SL 3.7

Flange (bracket) installation







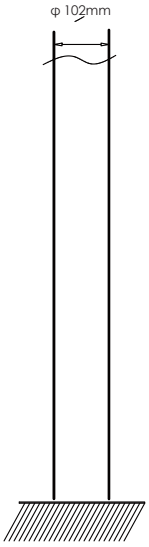

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
			24°
40W COB	4000.0		36°
			60°
60W COB	6000.0		40*70°

2700/4000/5000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP66 | IK06 | CE | CB | 5 YEARS




Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packagingsize	32*32*42cm 4PCS 8.6kg

OPTION




Unilateralflange(bracket)
Material: Die cast aluminum/aluminum profile



Bilateralflange(bracket)









ROSE

EZ-SL 2.6

Sign Light

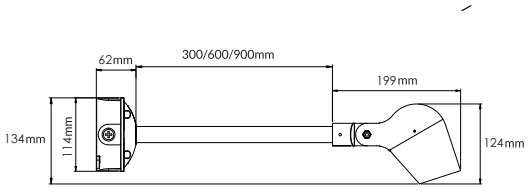





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
			24°
15W COB	1440.0		36°
			60°
20W COB	1920.0		40*70°

2700/4000/5000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP66 | IK06 | CE | CB | 5 YEARS



Technical Data


Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or(AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

OPTION





JB Junction Box





WM Wall Mount

Extension arm

Material: Aluminum profile
Specification: Thickness 4mm、φ 25mm
*Length can be customized







EZ-OK

The LTOK LED area/site luminaire delivers exceptional performance in a scalable, low-profile design. The precision engineered optics provide uniform illumination to walkways, parking lots, roadways, building areas and security lighting applications. Backed by a five-year limited warranty, the LTOK LED area/site luminaire is the LED answer to your area and site lighting needs.









light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
LT-OK-100W	14000.0	140.0	Symmetry 135°
LT-OK-150W	21000.0		Asymmetric TYPE III(73x149°)
LT-OK-200W	28000.0		Asymmetric TYPE IV(86x153°)

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK06 | CE | 5 YEARS



Technical Data

Wattage	100/150/200W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	144/200/288 x 3030LED CRI>80


Standard Deviation Color Matching :MacAdam step 3


Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	5.5 Kg

OPTION



Photocell



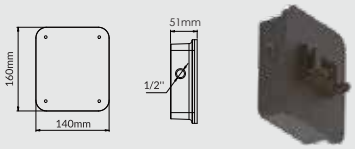


Wall Mount



EZ-OK

The LTOK LED area/site luminaire delivers exceptional performance in a scalable, low-profile design. The precision engineered optics provide uniform illumination to walkways, parking lots, roadways, building areas and security lighting applications. Backed by a five-year limited warranty, the LTOK LED area/site luminaire is the LED answer to your area and site lighting needs.

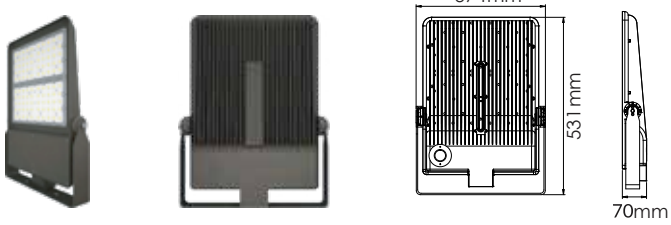

light sources*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
LT-OK-300W	42000.0	140.0	Symmetry 135°
			Asymmetric TYPE III(73x149°)
			Asymmetric TYPE IV(86x153°)

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK06 | CE | 5 YEARS



Technical Data

Wattage	300W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	464 x 3030LED CRI>80


Standard Deviation Color Matching :MacAdam step 3


Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	8.4Kg

OPTION



Photocell

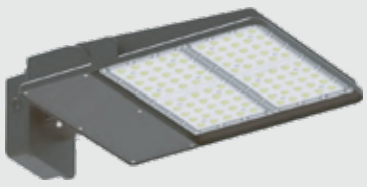

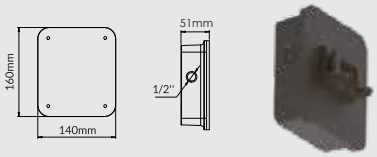

Wall Mount

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions



BOLLARDS AND URBAN LIGHTING




LAUGH

EZ-BL

A series of LED light building elements with asymmetrical light distribution. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances







light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-BL-12W	960.0	80.0	Asymmetric (70x150°)
3000/4000K CCT available on request			Unilateral light output

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP65 | IK08 | CE | 5 YEARS




Technical Data

Wattage	12W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	4x5050LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	(0.6m)4.5 Kg (0.8m)5.5 Kg (1m)6.5 Kg
Package size	(0.6m)66*23*22cm (0.8m)86*23*22cm (1m)106*23*22cm

OPTION

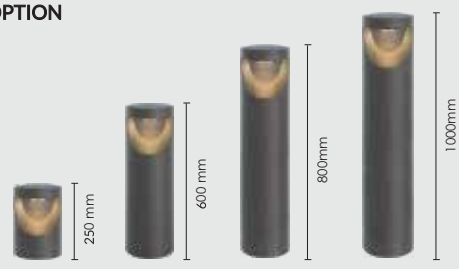





Concreteanchor 1023
Material: steel
*Need to be purchased separately




LAUGH

EZ-BL

A series of LED light building elements with asymmetrical light distribution. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances







light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-BL-24W	1920.0	80.0	Asymmetric 2*(70x150°)

3000/4000K CCT available on request

Bilateral light output

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS






Technical Data

Wattage	24W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	8x5050LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	(0.6m)4.5 Kg (0.8m)5.5 Kg (1m)6.5 Kg
Package size	(0.6m)66*23*22cm (0.8m)86*23*22cm (1m)106*23*22cm

OPTION







Concrete anchor 1023
Material: steel
*Need to be purchased separately



ECLIPSE

EZ-YS

Super comfort, no glare at all 180° and 360° symmetrical light distribution Die-cast aluminum fixture with polyester powder coating on the surface IK08 IP65 protection level Multiple installation options





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-12W	497.0	42.0	Symmetry 180°

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS







Technical Data

Wattage	12W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	18x2835LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	(0.6m)4.5 Kg (0.8m)5.5 Kg (1m)6.5 Kg
Package size	(0.6m)66*23*22cm (0.8m)86*23*22cm (1m)106*23*22cm

OPTION

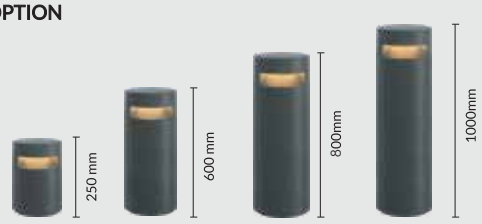





Concreteanchor 1023
Material: steel
*Need to be purchased separately



ECLIPSE

EZ-YS

Super comfort, no glare at all 180° and 360° symmetrical light distribution Die-cast aluminum fixture with polyester powder coating on the surface IK08 IP65 protection level Multiple installation options





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-24W	1008.0	42.0	Symmetry (360°)

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS







Technical Data

Wattage	24W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	24x2835LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	(0.6m)4.5 Kg (0.8m)5.5 Kg (1m)6.5 Kg
Package size	(0.6m)66*23*22cm (0.8m)86*23*22cm (1m)106*23*22cm

OPTION

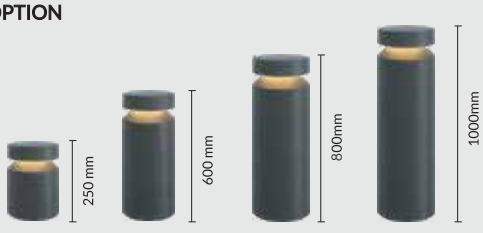





Concrete anchor 1023
Material: steel
*Need to be purchased separately




ECLIPSE

EZ-YS

Super comfort, no glare at all 180° and 360° symmetrical light distribution Die-cast aluminum fixture with polyester powder coating on the surface IK08 IP65 protection level Multiple installation options





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-10W	700.0	70.0	Symmetry 360°

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS







Technical Data

Wattage	10W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	24x2835LED CRI>80
Standard Deviation Color Matching :MacAdam ste	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included

OPTION

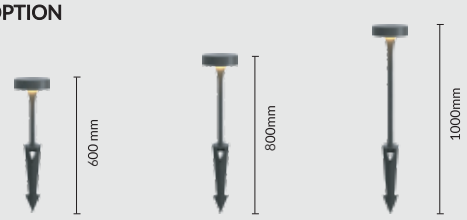

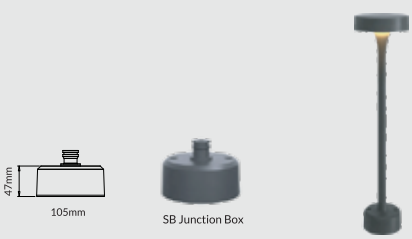




ROSE

EZ-SL BOLLARD LIGHT 1.0

Small bollards for private gardens with various sizes and angles to choose from.

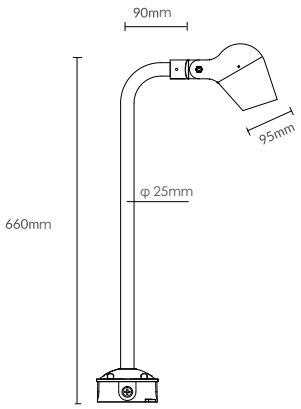

Technical Features

IP66 | IK06 | CE | CB | 5 YEARS



Technical data	
Wattage	7W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1xCOB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
7W COB	700.0	100.0	15°
			24°
			36°
			60°
			40*70°


2700/4000/5000K CCT available on request


Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

OPTION

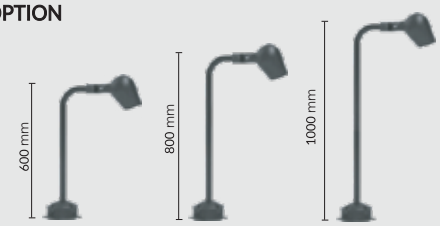

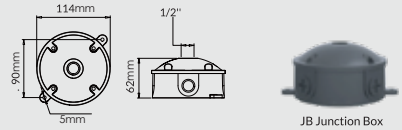

Extension arm

Material: Aluminum profile
Specification: Thickness 4mmφ 25mm
*Length can be customized






ROSE

EZ-SL BOLLARD LIGHT 2.0

Small bollards for private gardens with various sizes and angles to choose from.

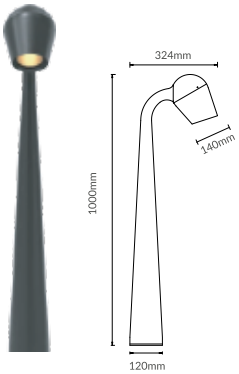

Technical Features

IP66 IK06 CE CB 5 YEARS



Technical data

Wattage	20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90

Standard Deviation Color Matching :MacAdam step 3

Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	4.5 Kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
20W COB	2000.0	100.0	15°
			24°
			36°
			60°
			40*70°

2700/4000/5000K CCT available on request


Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

OPTION





Concrete anchor 1023
Material: steel
*Need to be purchased separately




SHADOW

EZ-YZ

The luminaire is designed on the principle of a reflective three-screen system, which directs the light downwards. The screens have amatte, white, lacquered inside, which diffuses the light so that it becomes comfortable to look at.





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-10W	464.0	46.4	Indirect luminescence

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP65 | IK06 | CE | 5 YEARS




Technical data

Wattage	10W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	24x2835LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	2 Kg

OPTION

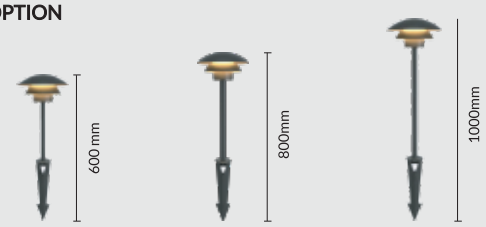

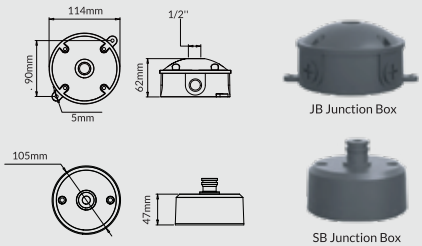




SHADOW

EZ-YZ

The luminaire is designed on the principle of a reflective three-screen system, which directs the light downwards. The screens have a matte, white, lacquered inside, which diffuses the light so that it becomes comfortable to look at.





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-20W	928.0	46.4	Indirect luminescence

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK06 | CE | 5 YEARS



Technical data

Wattage	20W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	24x2835LED CRI> 80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	2 Kg

OPTION



φ 60mm



φ 76mm

Material: Steel, surface hot-dip galvanized treatment and polyester powder spraying

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

STEP LIGHT






STEP LIGHT

EZ-TJ-Y512

Lighting system for walkways designed for use with LED light sources to ensure high visual comfort. Wall installation. Built-in LED driver





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-TJ-F512-6W	464.0	76.0	Asymmetric

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors


Technical Features


IP65 | IK06 | CE | 5 YEARS



Technical data

Wattage	6W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	12x2835LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

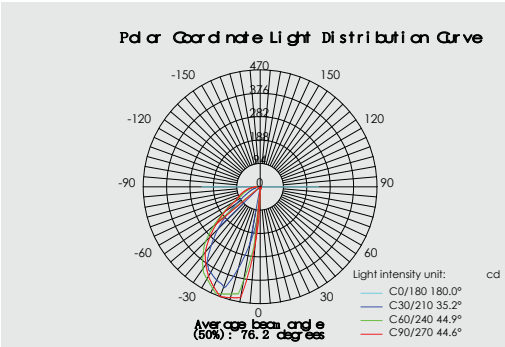

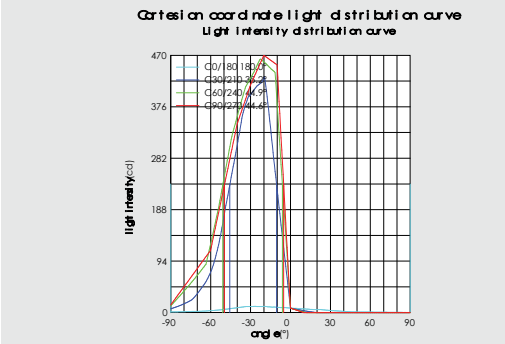




STEP LIGHT

EZ-TJ-F512

Lighting system for walkways designed for use with LED light sources to ensure high visual comfort. Wall installation. Built-in LED driver





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-TJ-F512-6W	464.0	76.0	Asymmetric

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK06 | CE | 5 YEARS




Technical data

Wattage	6W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	12x2835LED CRI>80

Standard Deviation Color Matching :MacAdam step 3


Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

Polar Coordinate Light Distribution Curve

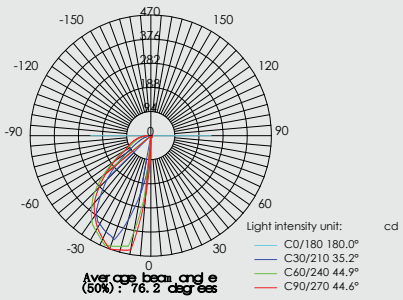

Cartesian coordinate light distribution curve

Light intensity distribution curve





PORTABLE TABLE LIGHTS

EZZOLIGHTS


Ezzolights by Ezzogenics | Your Complete Lighting Solutions



ECLIPSE

EZ-YS

Lighting system for walkways designed for use with LED light sources to ensure high visual comfort.Wall installation. Built-in LED driver



TYPE-C usb line

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-YS-2.5W	100.0	40.0	Symmetry 360°

3000/4000K CCT available on request

Technical Features

IP65 | IK06 | CE | 5 YEARS | 5000MA.H



360°




Technical data

Wattage	2.5W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	12x2835 LED CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Battery	5000MA.H
Standby time	8h
Glass	Tempered
Dimming	10-100%
Weight	2kg

Option



Blcak Rust Red

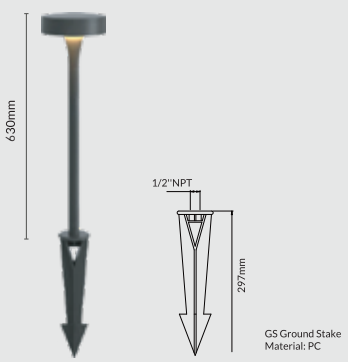



URBAN LIGHTS

EZZOLIGHTS


Ezzolights by Ezzogenics | Your Complete Lighting Solutions



SUNFLOWER

EZ-1885-30/50W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	3390.0	113.0	105°
EZ- 1885-50W	5650.0		

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS



Technical data

Wattage	30/50W
IP Rating	IP 65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request
Installation type	Smallpox



SUNFLOWER

EZ-1885-30/50W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	3390.0	113.0	105°
EZ- 1885-50W	5650.0		

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS



Technical data

Wattage	30/50W
IP Rating	IP 65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs

Standard Deviation Color Matching :MacAdam step 3

Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg

Surge Protection 6 KV

Notes	Can on request DALI version available on request
Installation type	Pendant




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V
3000/4000K CCT available on request			

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP65 | IK08 | CE | 5 YEARS



Technical data

Wattage	30/50/70/90W
IP Rating	IP 65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	8 Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request
Installation type	Wall

Option

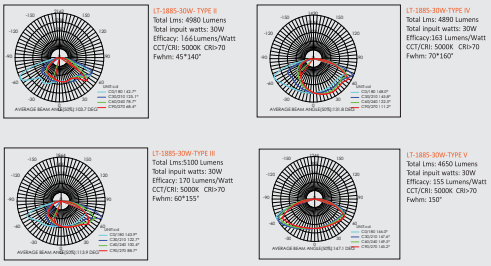




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



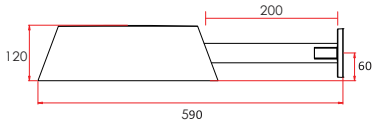

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V
3000/4000K CCT available on request			

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP65 | IK08 | CE | 5 YEARS



Technical data

Wattage	30/50/70/90W
IP Rating	IP 65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.5 Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request
Installation type	Wall

Option

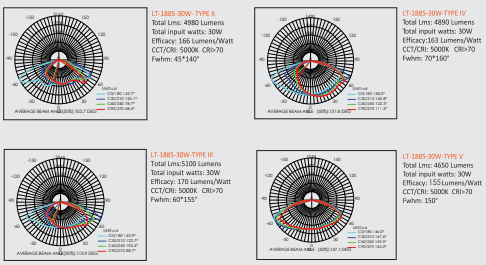



SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V
3000/4000K CCT available on request			

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP65 | IK08 | CE | 5 YEARS



Technical data

Wattage	30/50/70/90W
IP Rating	IP 65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.5Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request
Installation type	Overhead

Option

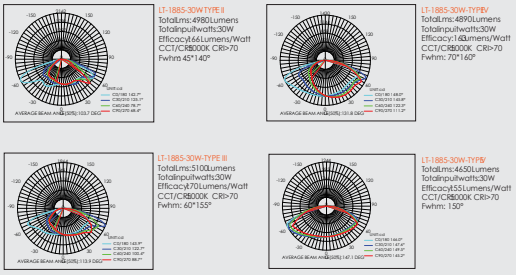




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V
3000/4000K CCT available on request			

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP65 | IK08 | CE | 5 YEARS



Technical data

Wattage	30/50/70/90W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	8.1Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request
Installation type	Slip Fitter

Option

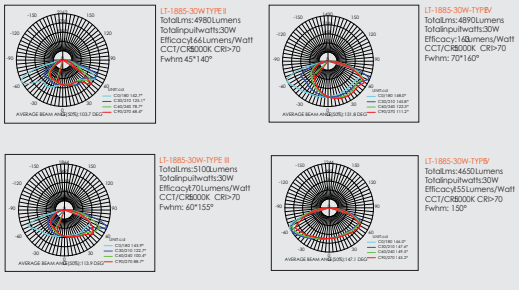




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V
3000/4000K CCT available on request			

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP65 | IK08 | CE | 5 YEARS



Technical data

Wattage	30/50/70/90W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request
Installation type	Pole Mount

Option

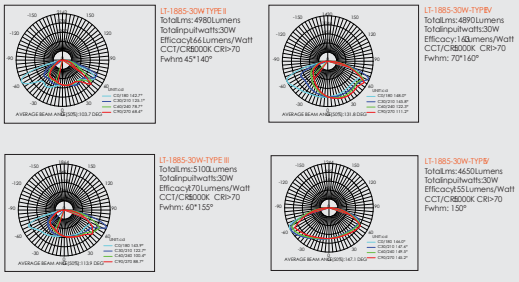




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V
3000/4000K CCT available on request			

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP65 | IK08 | CE | 5 YEARS



Technical data

Wattage	30/50/70/90W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.5 Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request
Installation type	Pole Mount

Option

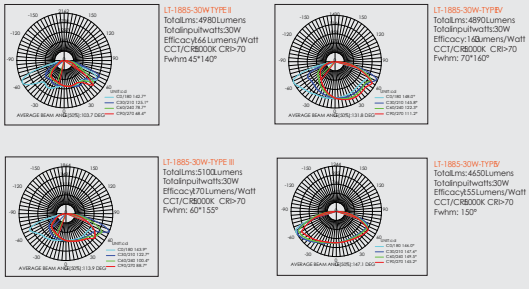




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



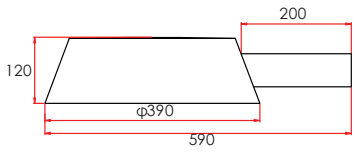

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP65 | IK08 | CE | 5 YEARS



Technical data

Wattage	30/50/70/90W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request
Installation type	Pole Mount

Option

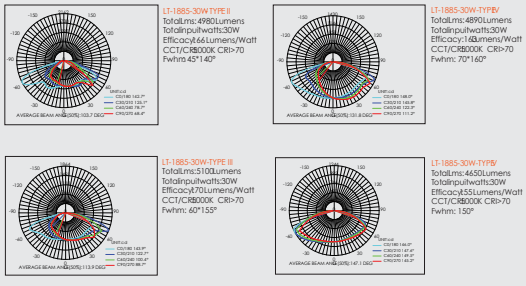




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V
3000/4000K CCT available on request			

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

Technical Features


IP65 IK08 CE 5 YEARS



Technical data

Wattage	30/50/70/90W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request
Installation type	Catenary Mount

Option

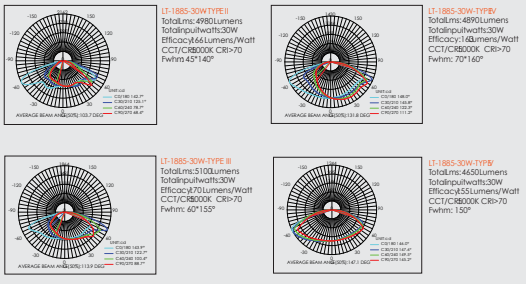




PARASOL

EZ-DZ-50/70/100W

Die-cast aluminium body (EN 47100). Double layer polyester powder paint resistant to corrosion and salt spray fog. Silicone rubber gaskets. AISI 316 stainless steel external screws. Driver protected against voltage surges. PMMA lenses for LEDs. Screen made of 5mm thermal-shock resistant tempered glass.





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- OS-50W	6000.0	120.0	Type II
			Type III
EZ- OS-70W	8400.0		Type IV
			Type IV Wide
EZ- OS-100W	1200.0		Type V Square Medium
			Type V Wide (Round)

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP66 IK08 CE 5 YEARS



Technical data

Wattage	50/70/100W
IP Rating	IP66
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request

Option

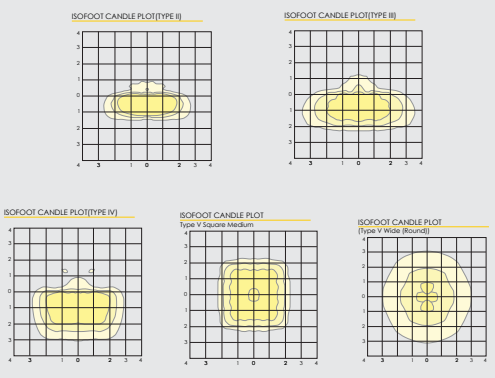





LAUGH

EZ-BL-UT-24W

A series of LED light building elements with asymmetrical light distribution. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-BL-UT-24W	1920.0	80.0	Asymmetric (70x150°)

3000/4000K CCT available on request

Unilateral light output

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors


Technical Features


IP65 | IK08 | CE | 5 YEARS



Technical data	
Wattage	24W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	8x5050LED CRI>80
Standard Deviation Color Matching :MacAdam step	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Neoprene cable 3x0.75
Power cable	1 mt. neoprene power cable included

Lamp body material: Polycarbonate powder spraying on the surface of aluminum profile





Concrete anchor 1024
Material: steel
*Need to be purchased separately

EZZOLIGHTS


Ezzolights by Ezzogenics | Your Complete Lighting Solutions




LAUGH

EZ-BL-UT-48W

A series of LED light building elements with asymmetrical light distribution. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-BL-UT-48W	3840.0	80.0	Asymmetric 2*(70x150°)

3000/4000K CCT available on request

Unilateral light output

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (onrequest)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS




Technical data


Wattage	48W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	16x5050LED CRI>80

Standard Deviation Color Matching :MacAdam step

Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Neoprene cable 3x0.75
Power cable	1 mt. neoprene power cable included

Lamp body material: Polycarbonate powder sprayin on the surface of aluminum profile






Concrete anchor 1024
Material: steel
*Need to be purchased separately




LAUGH

EZ-BL-UT-36W

A series of LED light building elements with asymmetrical light distribution. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-BL-UT-36W	2880.0	80.0	Asymmetric (70x150°)
3000/4000K CCT available on request			Unilateral light output

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS




Technical data


Wattage	36W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	12x5050LED CRI>80

Standard Deviation Color Matching :MacAdam step

Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included

Lamp body material: Polycarbonate powder sprayin on the surface of aluminum profile






Concrete anchor 1024
Material: steel
*Need to be purchased separately




LAUGH

EZ-BL-UT-72W

A series of LED light building elements with asymmetrical light distribution. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-BL-UT-72W	5760.0	80.0	Asymmetric 2*(70x150°)
3000/4000K CCT available on request			Unilateral light output

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS






Technical data


Wattage	72W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	24x5050LED CRI>80

Standard Deviation Color Matching :MacAdam step

Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included

Lamp body material: Polycarbonate powder spraying on the surface of aluminum profile





Concrete anchor 1024
Material: steel
*Need to be purchased separately

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

WALL MOUNTING






POPLAR

EZ-BY

The Poplar outdoor wall sconce creates an elegant elongated column of beautifully diffused light. The Poplar is available in three sizes (20cm,40cm,60cm) to meet architectural scale; ideal for way-finding and general outdoor illumination. The Poplar features energy-efficient, fully dimmable integrated LED lamping (Dimming options). Available in two finishes: Bronze and Oak grain.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-BY-5W	150.0	30.0	Asymmetric
EZ-BY-20W	600.0		
EZ-BY-30W	900.0		

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP65 | IK06 | CE | 5 YEARS



Technical data	
Wattage	5/20/30W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Acrylic
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step	
Screws	Stainless steel
Transformer	Electronic power supply 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

Option









BLADE

EZ-WW-18

The contemporary aesthetic of the EZ-WW-18 outdoor wall sconce creates soft indirect, reduced-glare illumination by aiming light back against the wall for accenting architecture as well as for wayfinding.



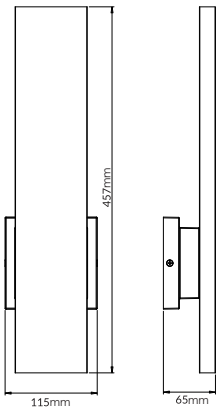

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-WW-18-20W	1200.0	60.0	Asymmetric

3000/4000K CCT available on request


Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors


Technical Features

IP65 | IK06 | CE | 5 YEARS

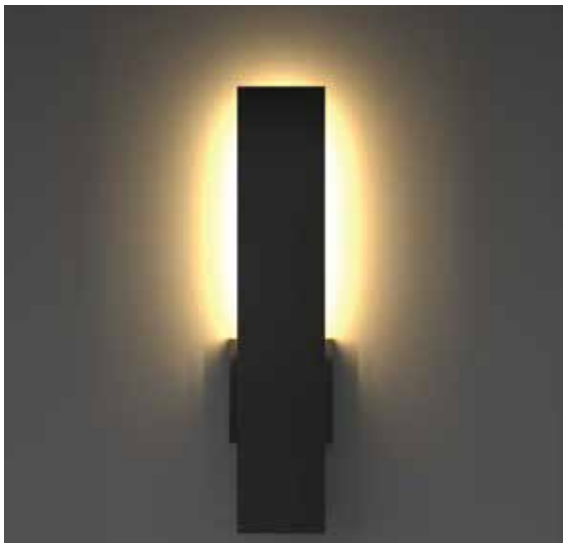




Technical data	
Wattage	20W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

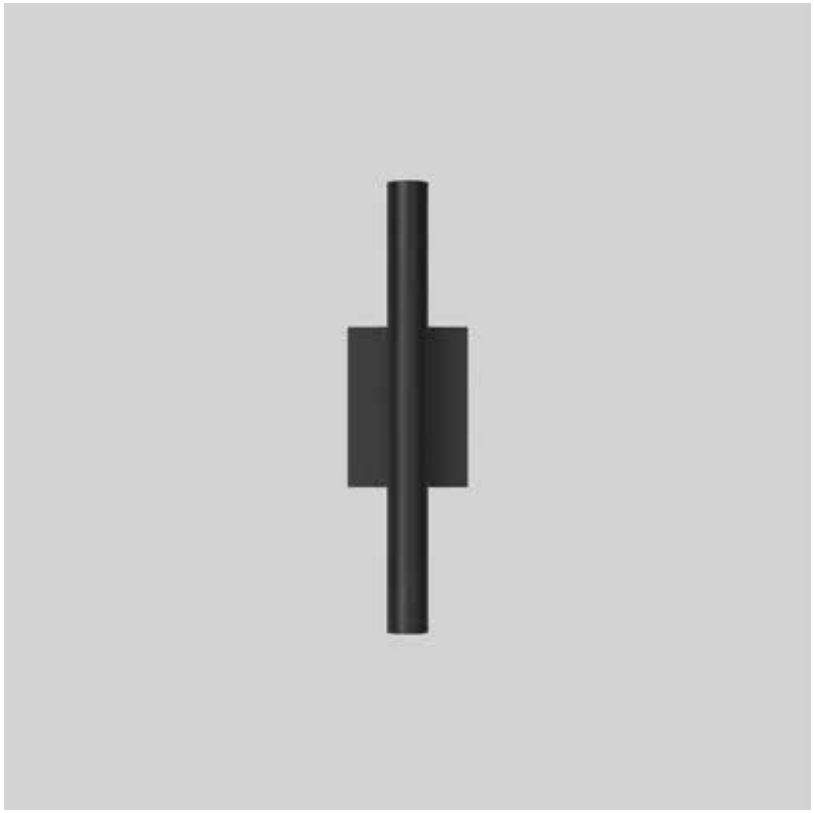

BLADE

EZ-CL

Strikingly elegant in its simplicity, LT-CL is a tubular design that creates a modern industrial look. Designed with a die-cast aluminum structure, powder coat finish, and stainless steel hardware for robust durability in harsh elements. Appropriate for commercial use. Available as Square or Round in three sizes





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-CL-12W	1286.0	100.0	15°
			24°
			36°

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (onrequest)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features


IP65 | IK06 | CE | 5 YEARS




Technical data

Wattage	12W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step	
Screws	Stainless steel
Transformer	Electronic power supply 220-240V or 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

Total Lumen Output:	1286
Total Power:	11.8
Luminaire Efficacy:	109
Color Temp:	3000K
CRI:	80+
BUG Rating:	B1

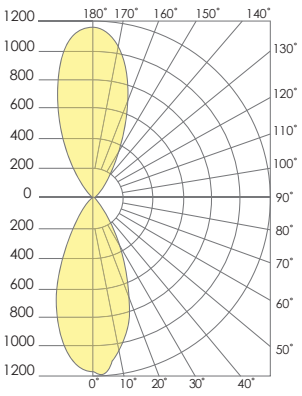

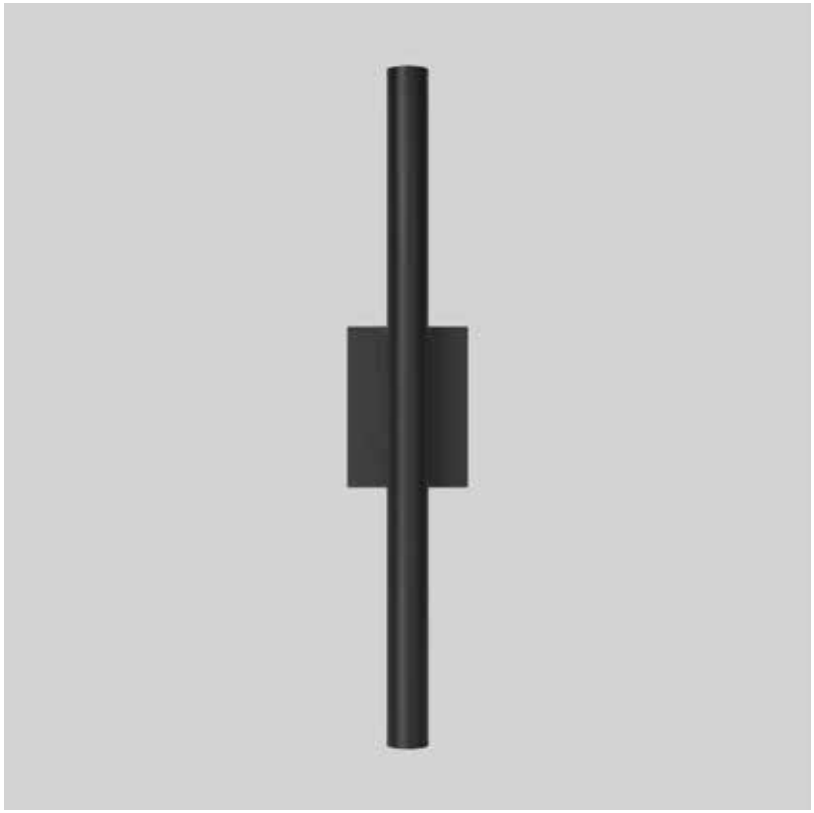


BLADE

EZ-CL

Strikingly elegant in its simplicity,EZ-CL is a tubular design that creates a modern industrial look. Designed with a die-cast aluminum structure, powder coat finish, and stainless steel hardware for robust durability in harsh elements. Appropriate for commercial use. Available as Square or Round in three sizes



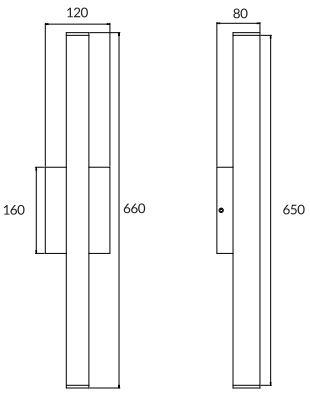

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-CL-12W	1286.0	100.0	15°
			24°
			36°

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors


Technical Features

IP65 | IK06 | CE | 5 YEARS



Technical data	
Wattage	12W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step	
Screws	Stainless steel
Transformer	Electronic power supply 220-240V or 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

Total Lumen Output:	1286
Total Power:	11.8
Luminaire Efficacy:	109
Color Temp:	3000K
CRI:	**80+**
BUG Rating:	**B1**-U4-G0

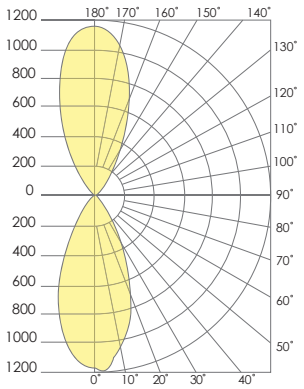



Technical Features

IP65 | IK06 | CE | 5 YEARS




BLADE

EZ-WL

Strikingly elegant in its simplicity,EZ-WL is a tubular design that creates a modern industrial look. Designed with a die-cast aluminum structure, powder coat finish, and stainless steel hardware for robust durability in harsh elements. Appropriate for commercial use. Available as Square or Round in three sizes.



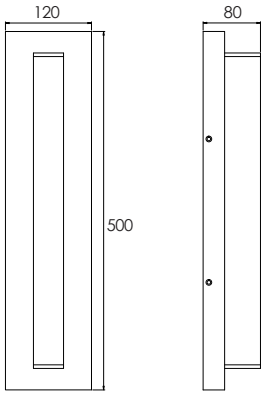

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-WL-12W	1286.0	100.0	15°
			24°
			36°

3000/4000K CCT available on request


Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical data	
Wattage	12W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220-240V or 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

Total Lumen Output:	1286
Total Power:	11.8
Luminaire Efficacy:	109
Color Temp:	3000K
CRI:	80+
BUG Rating:	B1-U4-G0

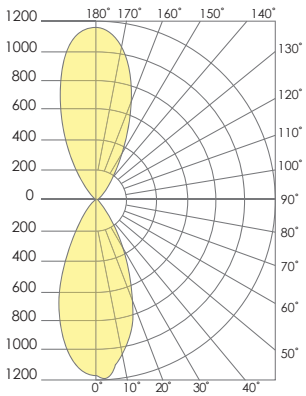




Technical Features


IP65 | IK06 | CE | 5 YEARS | ETL



EZ-XT-06

Heavy duty die-cast aluminum housing and door. The door frame is fully gasketed to keep out moisture and dust for the luminaire. Specular thermoplastic reflector and clear glass lens. Integral secondary heat sink to optimize thermal transfer and maximize performance and life of LED. Driver is mounted in direct contact with the casting for a low operating temperature and long life.









light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-XT-06-15W	1500.0	100.0	Asymmetric
EZ-XT-06-20W	2000.0		
EZ-XT-06-25W	2500.0		

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical data

Wattage	15/20/25W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1x COB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Reflective cup
Power Cables	Internal wiring
Gross weight	1.2 Kg

Option



Extra swivel photocell sensor available






Stainless steel U-shaped bracket

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

RECESSED

FOR OUTDOOR APPLICATIONS

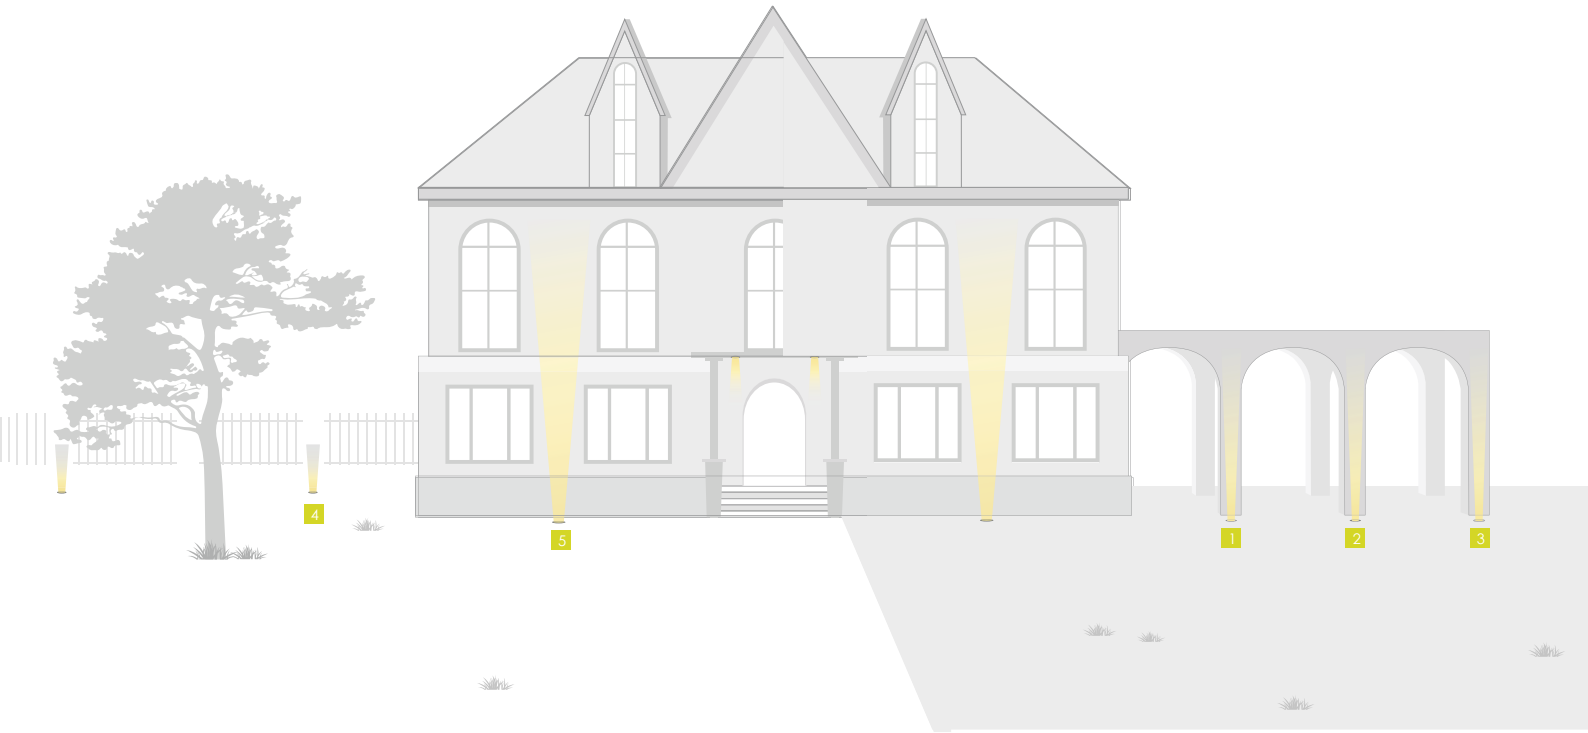




Technical Features


IP66 IK08 CE 5 YEARS III



EZ-BM-316

Vandal resistant polycarbonate molded housing cover and lens,maximize performance and life of LED Driver is mounted in direct contact with the chamber for a low operating temperature and long life Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling.



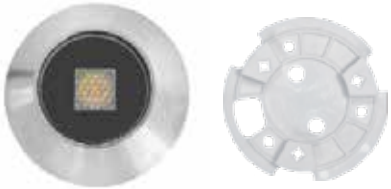


Surface mount base

Technical data	
Wattage	5W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step	
Screws	Stainless steel
Transformer	DC24V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Gross weight	1 Kg


light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-BM-316-5W	450.0	90.0	8/11/15/30/45 /66/40*12°

3000/4000K CCT available on request


Light distribution options:



Option

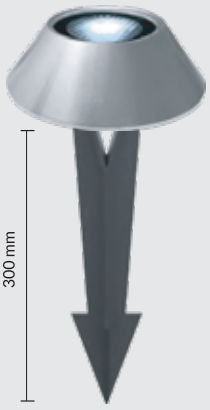

GS Ground Stake
Material: PC



Honeycomb louvre built into the lighting fixture




Technical Features

IP66 IK08 CE 5 YEARS




EZ-DMD-130-6W

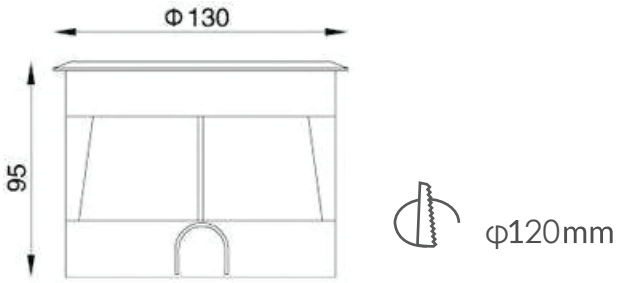

Technical data	
Wattage	6W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ120mm
Gross weight	1.1 Kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-130-6W	540.0	90.0	8/15/30/45 /15*60°
3000/4000K CCT available on request			

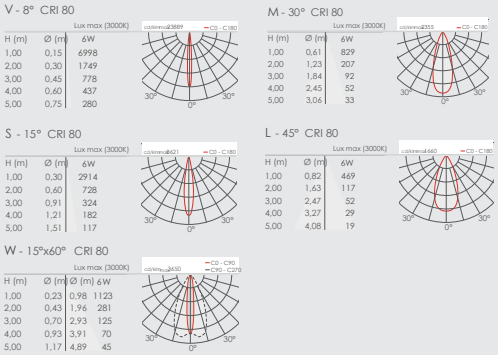

Light distribution options:





EZZOLIGHTS


Ezzolights by Ezzogenics | Your Complete Lighting Solutions

Technical Features

IP66 IK08 CE 5 YEARS



EZ-DMD-160-9W





φ145mm

Technical data	
Wattage	9W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ145mm
Gross weight	1.8 Kg


light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-160-9W	810.0	90.0	8/15/30/45 /15*60°
3000/4000K CCT available on request			

Light distribution options:




S - 15° CRI 80

H (m)	Ø (m)	9W
1,00	0,28	5580
2,00	0,56	1395
3,00	0,84	620
4,00	1,13	349
5,00	1,41	223




L - 45° CRI 80

H (m)	Ø (m)	9W
1,00	1,04	1070
2,00	2,08	268
3,00	3,12	119
4,00	4,16	67
5,00	5,20	43



M - 30° CRI 80

H (m)	Ø (m)	9W
1,00	0,69	1755
2,00	1,38	439
3,00	2,07	195
4,00	2,76	110
5,00	3,45	70






Technical Features

IP66 IK08 CE 5 YEARS



EZ-DMD-230-18W

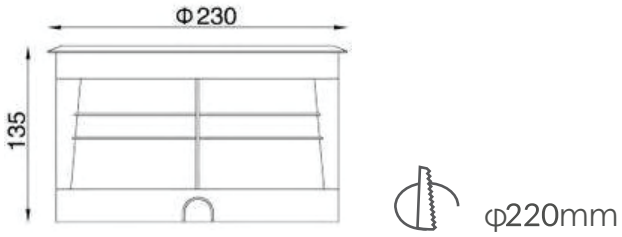


Technical data	
Wattage	18W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ220mm
Gross weight	3.3 Kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-230-18W	1620.0	90.0	8/15/30/45 /15*60°


3000/4000K CCT available on request

Light distribution options:




S - 15°

H (m)	Ø (m)	Lux max (3000K)
1,00	0,23	16071
2,00	0,46	4018
3,00	0,70	1786
4,00	0,93	1004
5,00	1,16	643



L - 45°

H (m)	Ø (m)	Lux max (3000K)
1,00	0,69	2618
2,00	1,38	655
3,00	2,07	291
4,00	2,76	164
5,00	3,45	105






Technical Features

IP66 IK08 CE 5 YEARS



EZ-DMD-230-24W





φ240mm

Technical data	
Wattage	24W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC 220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ240mm
Gross weight	4.2 Kg


light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-230-24W	2160.0	90.0	8/15/30/45 /15*60°
3000/4000K CCT available on request			

Light distribution options:




8° 15° 30° 45° 60*15°


S - 15° CRI 80



W - 15°x60° CRI 80




M - 30° CRI 80





EZ-DMD-160-7W

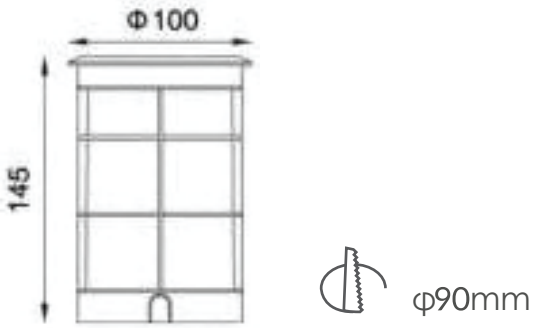

φ90mm

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-160-7W	630.0	90.0	15/24/45/60°
3000/4000K CCT available on request			

Light distribution options:




8° 15° 30° 45° 60*15°


Technical Features


IP66 IK08 CE 5 YEARS



Technical data	
Wattage	7W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	1 x COB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ90mm
Gross weight	1 Kg










Technical Features

IP66 IK08 CE 5 YEARS




EZ-DMD-120-7W

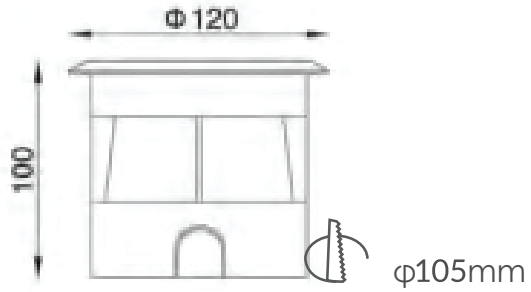

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-120-7W	630.0	90.0	15/24/45/60°
3000/4000K CCT available on request			


Light distribution options:



Technical data	
Wattage	7W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	1xCOB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ105mm
Gross weight	1 Kg



EZ-DMD-180-15W

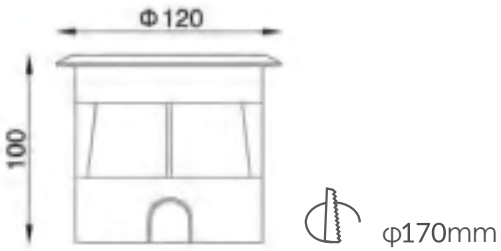


light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-180-15W	1350.0	90.0	15/24/45/60°
3000/4000K CCT available on request			

Light distribution options:



Technical Features


IP66 IK08 CE 5 YEARS

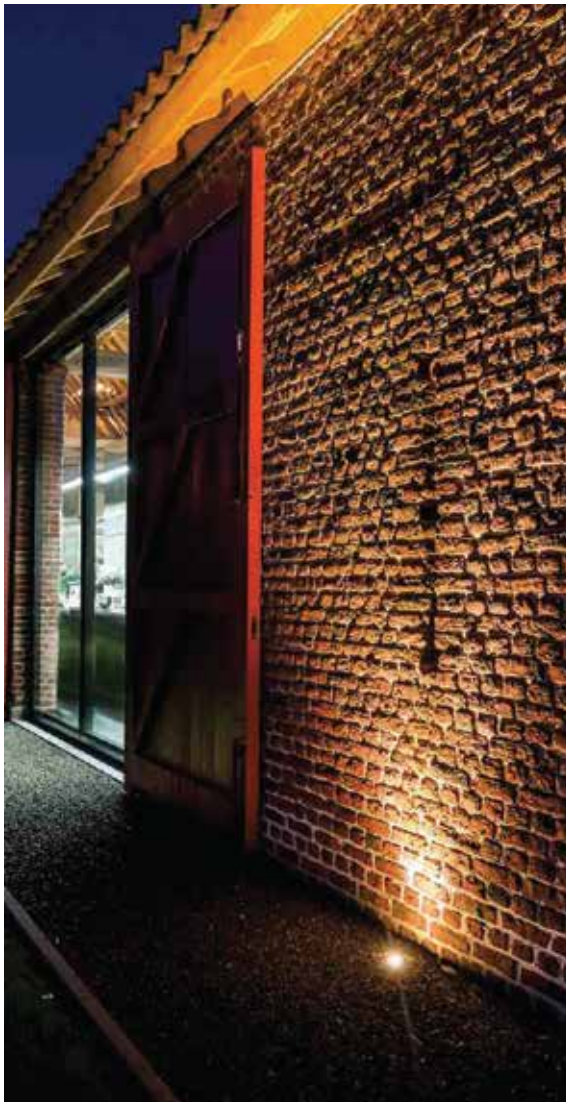

Technical data	
Wattage	15W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	1x COB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ170mm
Gross weight	2Kg




EZ-DMD-150-10W

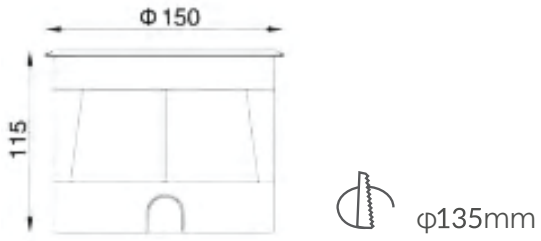

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-150-10W	900.0	90.0	15/24/45/60°
3000/4000K CCT available on request			

Light distribution options:



Technical Features

IP66 IK08 CE 5 YEARS



Technical data	
Wattage	10W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	1 x COB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ135mm
Gross weight	1.5Kg


EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions




Technical Features

IP66 IK08 CE 5 YEARS

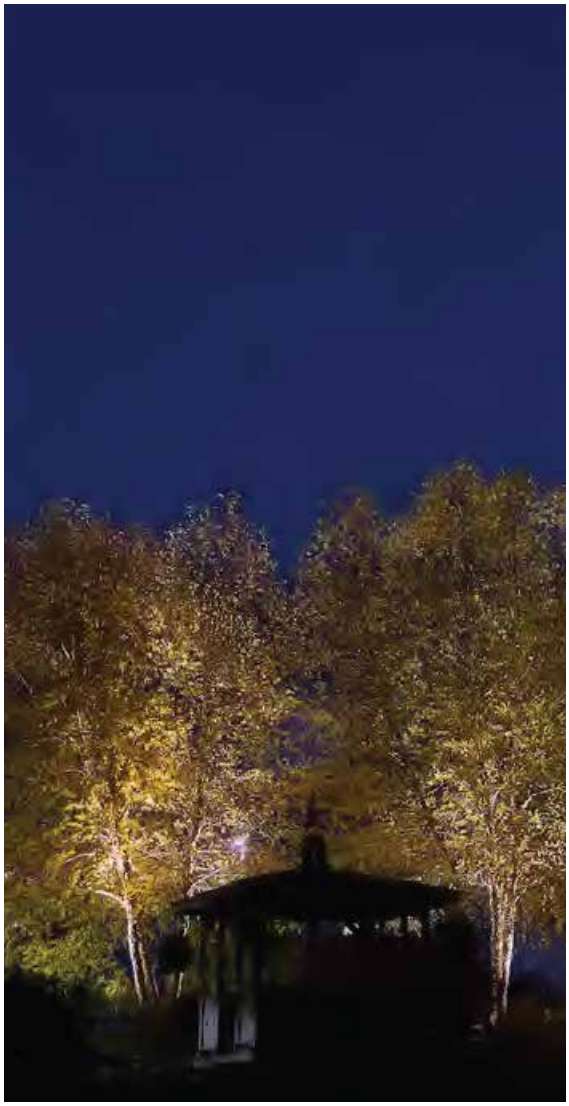


EZ-DMD-260-30W

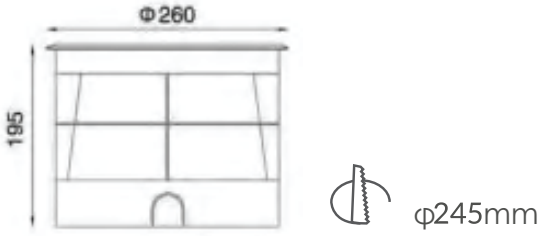

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-260-30W	2700.0	90.0	15/24/45/60°
3000/4000K CCT available on request			

Light distribution options:



Technical data	
Wattage	30W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	1 x COB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ245mm
Gross weight	4.2Kg

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

STREET LAMP






EZ-OK

EZ-OK-100/150/200W

The LTOK LED area/site luminaire delivers exceptional performance in a scalable, low-profile design. The precision engineered optics provide uniform illumination to walkways, parking lots, roadways, building areas and security lighting applications. Backed by a five-year limited warranty, the LTOK LED area/site luminaire is the LED answer to your area and site lighting needs.

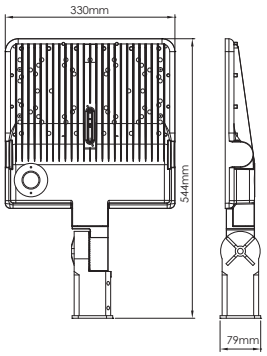

Technical Features

IP65 | IK06 | CE | 5 YEARS



Technical data	
Wattage	100/150/200W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	144/200/288 x 3030LED CRI>70
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Neoprene cable 3x0.75
Gross weight	5.5 Kg
Surge Protection	6 KV

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ-OK-100W	14000.0	140.0	TYPE II 45*155°
			TYPE V 135°
EZ-OK-150W	21000.0		Asymmetric TYPE III(73x149°)
EZ-OK-200W	28000.0		Asymmetric TYPE IV(86x153°)

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors


Option



Field-rotatable Optics



Arm mounting



Slip Fi er moun ng



Trunnion moun ng


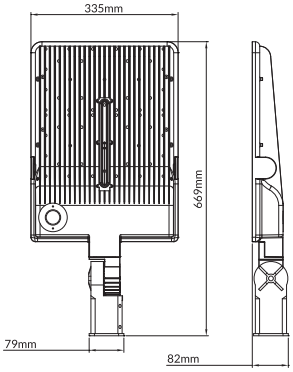

Photocell



EZ-OK

EZ-OK-300W

The LTOK LED area/site luminaire delivers exceptional performance in a scalable, low-profile design. The precision engineered optics provide uniform illumination to walkways, parking lots, roadways, building areas and security lighting applications. Backed by a five-year limited warranty, the LTOK LED area/site luminaire is the LED answer to your area and site lighting needs.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ-OK-300W	42000.0	140.0	TYPE II 45*155°
			TYPE V 135°
			Asymmetric TYPE III(73x149°)
			Asymmetric TYPE IV(86x153°)

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK06 | CE | 5 YEARS



Technical data	
Wattage	300W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	464 x 3030LED CRI>70
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	8.4Kg
Surge Protection	6 KV


Option


Field-rotatable Optics




Arm mounting



Slip Fi er moun ng




Trunnion moun ng




Photocell



EZ-OS-50/70W

Die-cast aluminium body (EN 47100). Double layer polyester powder paint resistant to corrosion and salt spray fog. Silicone rubber gaskets. AISI 316 stainless steel external screws. Driver protected against voltage surges up to 10kV. PMMA lenses for LEDs. Screen made of 5mm thermal-shock resistant tempered glass. High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.







light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- OS-50W	6500.0	130.0	Type II
			Type III
			Type IV
			Type IV Wide
EZ- OS-70W	9100.0		Type V Square Medium
			Type V Wide (Round)

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS




Technical data	
Wattage	50/70W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	3.8 Kg
Surge Protection 6 KV/10KV	
Notes	Can on request DALI version available on request

Option




Photocell

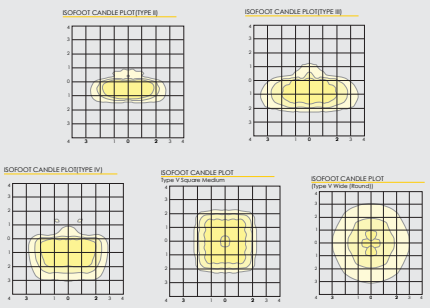



EZ-OS-100W

Die-cast aluminium body (EN 47100). Double layer polyester powder paint resistant to corrosion and salt spray fog. Silicone rubber gaskets. AISI 316 stainless steel external screws. Driver protected against voltage surges up to 10kV. PMMA lenses for LEDs. Screen made of 5mm thermal-shock resistant tempered glass. High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ-OS-100W	13000.0	130.0	Type II
			Type III
			Type IV
			Type IV Wide
			Type V Square Medium
			Type V Wide (Round)

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS




Technical data	
Wattage	100W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	4.2 Kg
Surge Protection 6 KV/10KV	
Notes	Can on request DALI version available on request

Option




Photocell

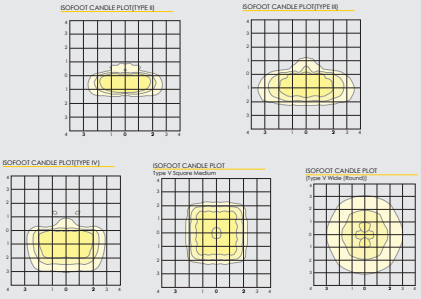



EZ-OS-150W

Die-cast aluminium body (EN 47100). Double layer polyester powder paint resistant to corrosion and salt spray fog. Silicone rubber gaskets. AISI 316 stainless steel external screws. Driver protected against voltage surges up to 10kV. PMMA lenses for LEDs. Screen made of 5mm thermal-shock resistant tempered glass. High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ-OS-150W	19500.0	130.0	Type II
			Type III
			Type IV
			Type IV Wide
			Type V Square Medium
			Type V Wide (Round)

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors


Technical Features

IP65 | IK08 | CE | 5 YEARS




Technical data	
Wattage	150W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	5.5 Kg
Surge Protection 6 KV/10KV	
Notes	Can on request DALI version available on request

Option



Photocell

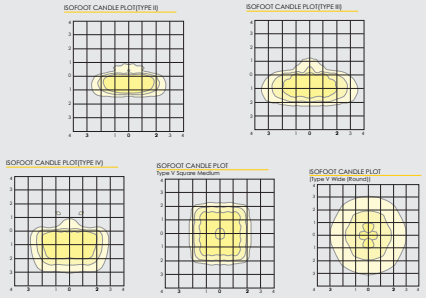




EZ-OS-200W

Die-cast aluminium body (EN 47100). Double layer polyester powder paint resistant to corrosion and salt spray fog. Silicone rubber gaskets. AISI 316 stainless steel external screws. Driver protected against voltage surges up to 10kV. PMMA lenses for LEDs. Screen made of 5mm thermal-shock resistant tempered glass. High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.







light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ-OS-200W	26000.0	130.0	Type II
			Type III
			Type IV
			Type IV Wide
			Type V Square Medium
			Type V Wide (Round)

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65 | IK08 | CE | 5 YEARS



Technical data	
Wattage	200W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	6.7 Kg
Surge Protection 6 KV/10KV	
Notes	Can on request DALI version available on request

Option



Photocell

