



EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions



LED LANDSCAPE & ARCHITECTURAL LIGHTING

www.ezzogenics.com

Showroom: Bartley Biz Centre, Blk 15 Kaki Bukit Rd 4, #01-44, S 417808

Tel: 69683098 / 87583098 / 96320750 Email: david@ezzogenics.com, admin@ezzogenics.com


LIGHT DISTRIBUTION

Ezzolights provides a wide variety of optical light distributions suitable for all architectural, roadway and area lighting applications, for example, VN: very narrow, N: narrow beam, M: medium beam, W: wide beam, VW: very wide beam: E: elliptical beam, plus Type II, III, IV and ME classification from IESNA/EN.



Distribution Type I (T1)

Type I distributes a very lineal shape. It is the optimal choice for applications such as one or two-lane roadways, walkways, paths or sidewalks. With a preferred lateral width of 15 degrees, it is suitable for lighting streets or pathways that have a width of up to 2 times the mounting height.

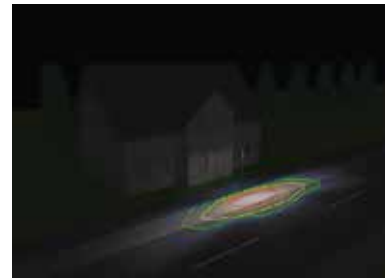


Distribution Type II (T2)

Ideal for wider walkways, entrance, roadways, bike paths and other long and narrow lighting application. Intended to be located near the side of a roadway, approximately 1.15 MH. Half-maximum candela trace on the Street side is beyond the 1 MH LRL but not beyond the 1.75 MH LRL.



Distribution Type III (T3)

Ideal for roadways, general parking, and other lighting application. Half-maximum candela trace on the Street side is beyond the 1.75 MH LRL but not beyond the 2.75 MH LRL.

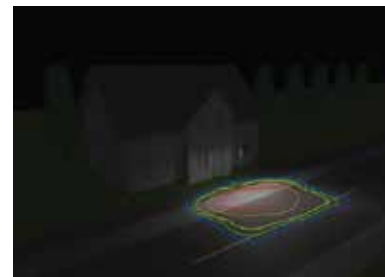

Distribution Type IV (T4)

Especially suited for wall mounting or area applications and for illuminating the perimeter of parking areas. Half-maximum candela trace on the Street side is beyond the 2.75 MH LRLMH LRL.



Distribution Type V (T5)

Type V distributes a circular pattern (there is also a Type VS that produces a square distribution with a more defined angle). Having the same distribution at all lateral angles, it is perfect for general area lighting the ideal choice if you are looking to do parking lots or intersections.



Distribution Type ME

For motorized vehicles on traffic routes. Some countries apply ME classes from ME1-ME6, with ME1 defining the strictest requirements. For wet road conditions the MEW classes go from MEW1 to MEW6.

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions



PROJECTORS

FOR OUTDOOR APPLICATIONS



ROSE Pro



ROSE




ROSE Mini

Rose Series Projector



ROSE Mini EZ-SL 1.0

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

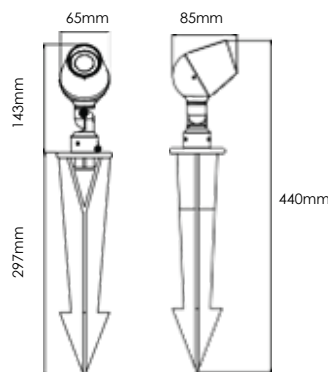

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
3W COB	240.0	80.0	15°
6W COB	480.0		24°
8W COB	640.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request

Finish color options:

Textured Grey RAL 9006	Anthracite Grey RAL 7024	Matt Black (on request)
Bronze RAL 8019	* Customizable in different finishing colors	

Technical Features



Technical Data

Wattage	3/6/8W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching:	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	0.35 Kg
Packaging	41*21*41cm(20Pcs) 8.6kg

Option



OPTICAL ACCESSORIES



Honeycomb louvre built into the lighting fixture

Technical Features




Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching:	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.1 Kg
Packaging	33*27*31cm(6Pcs) 6.5kg

ROSE EZ-SL 2.0

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

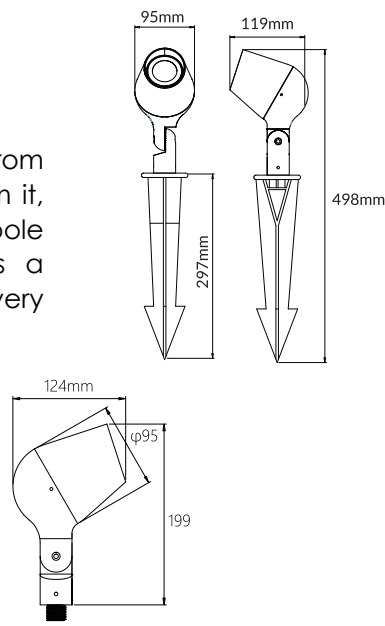

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.0	15°
15W COB	1440.0		24°
20W COB	1920.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request

Finish color options:

Textured Grey RAL 9006	Anthracite Grey RAL 7024	Matt Black (on request)
Bronze RAL 8019	* Customizable in different finishing colors	



OPTICAL ACCESSORIES




Honeycomb louvre built into the lighting fixture



ROSE Pro EZ-SL 3.0

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

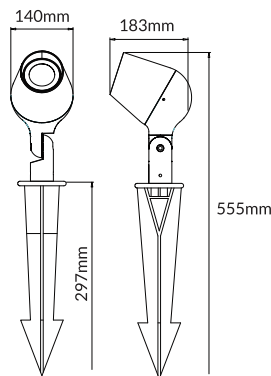

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.0	15°
40W COB	4000.0		24°
60W COB	6000.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7024
- Matt Black
(on request)
- Bronze
RAL 8019

* Customizable in different finishing colors

Technical Features



Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching:	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15Kg
Packaging	32*32*42cm(4Pcs) 8.6kg



GS Ground Stake 1.1 Material: PVC
*Can be customized in different lengths

OPTICAL ACCESSORIES



Honeycomb louvre built into the lighting fixture

Technical Features

IP66

IK06

CE

CB

5
YEARS




Technical Data

Wattage	3/6/8W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	0.35 Kg
Packaging	41*21*41cm(20Pcs) 8.6kg

ROSE Mini EZ-SL 1.1

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

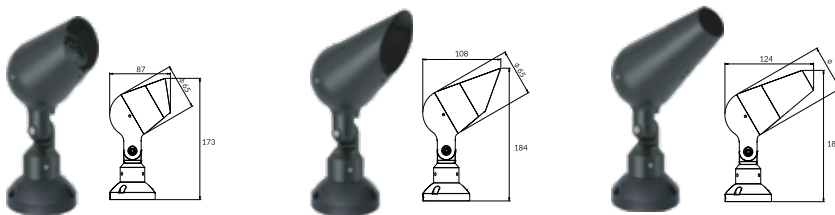


light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
3W COB	240.0	80.0	15°
6W COB	480.0		24°
8W COB	640.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request


Finish color options:

Textured Grey RAL 9006	Anthracite Grey RAL 7024	Matt Black (on request)
Bronze RAL 8019	* Customizable in different finishing colors	

Option

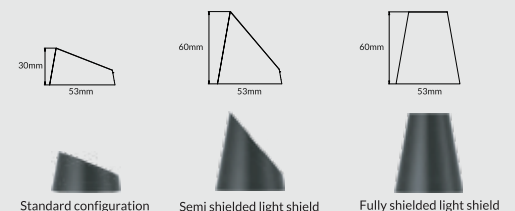

* Different types of light shields can be replaced on site

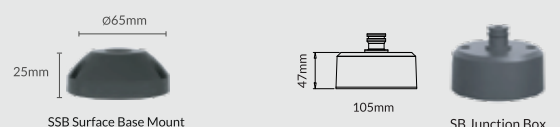

Technical Features





Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching:	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging	33*27*31cm(6Pcs) 6.5kg

ROSE EZ-SL 2.1

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

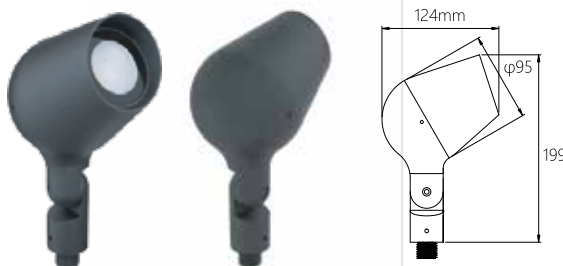


light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.0	15°
15W COB	1440.0		24°
20W COB	1920.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request

Finish color options:

Textured Grey RAL 9006	Anthracite Grey RAL 7024	Matt Black (on request)
Bronze RAL 8019	* Customizable in different finishing colors	

Option

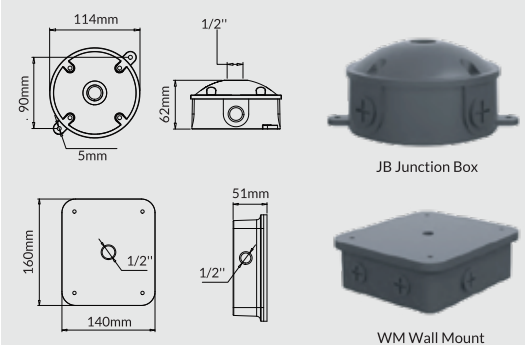

OPTICAL ACCESSORIES



Honeycomb louvre built into the lighting fixture

Technical Features




Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching:	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15Kg
Packaging	32*32*42cm(4Pcs) 8.6kg

ROSE Pro EZ-SL 3.1

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.




light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.0	15°
40W COB	4000.0		24°
60W COB	6000.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request

Finish color options:

Textured Grey RAL 9006	Anthracite Grey RAL 7024	Matt Black (on request)
Bronze RAL 8019	* Customizable in different finishing colors	

Option

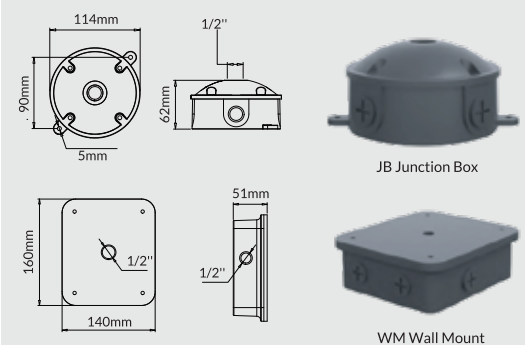

OPTICAL ACCESSORIES



Honeycomb louvre built into the lighting fixture



ROSE RGBW EZ-SL 2.0 RGBW

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
RGBW			
12W COB	396.0	33.00	15° 24° 36° 60° 40*70°

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7024
- Matt Black
(on request)
- Bronze
RAL 8019

* Customizable in different finishing colors

Technical Features


IP66 IK06 CE CB 5 YEARS III



Technical Data

Wattage	12W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>80
Standard Deviation Color Matching:	MacAdam step 3
Screws	Stainless steel
Transformer	Silicone rubber
Gasket	Electronic power supply(DC24V)
Wireless transmission distance:	30m
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging	33*27*31cm(6Pcs) 6.5kg

Option

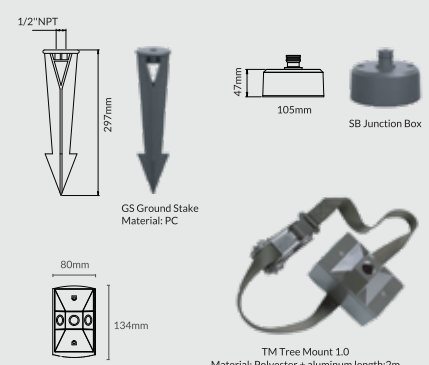



ROSE RGBW

EZ-SL 2.0 RGBW 512

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
RGBW			
12W	396.0	33.00	15° 24° 36° 60° 40*70°

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7024
- Matt Black
(on request)
- Bronze
RAL 8019

* Customizable in different finishing colors

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

Technical Features

- IP66


IK06

CE

CB


5 YEARS

III
- DMX512

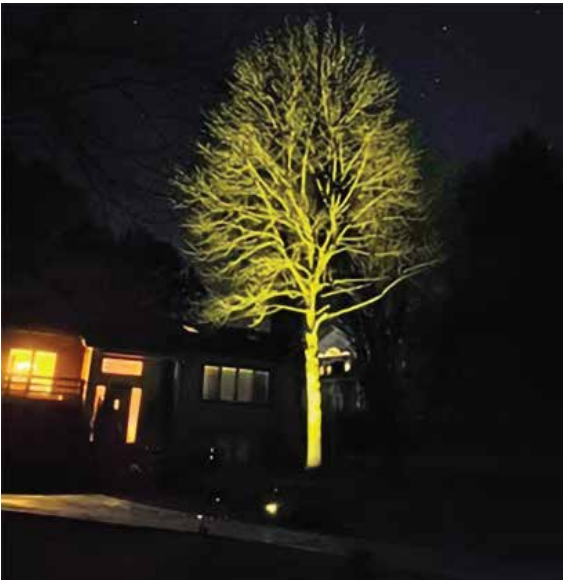

Technical Data

Wattage	12W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	3x 3535LED CRI>80
Standard Deviation Color Matching:	MacAdam step 3
Screws	Stainless steel
Transformer	Silicone rubber
Gasket	Electronic power supply(DC24V)
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging	33*27*31cm(6Pcs) 6.5kg

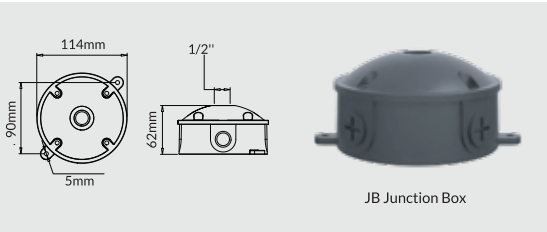



Technical Features

IP66

IK06


CE

CB

5 YEARS

III

DMX512

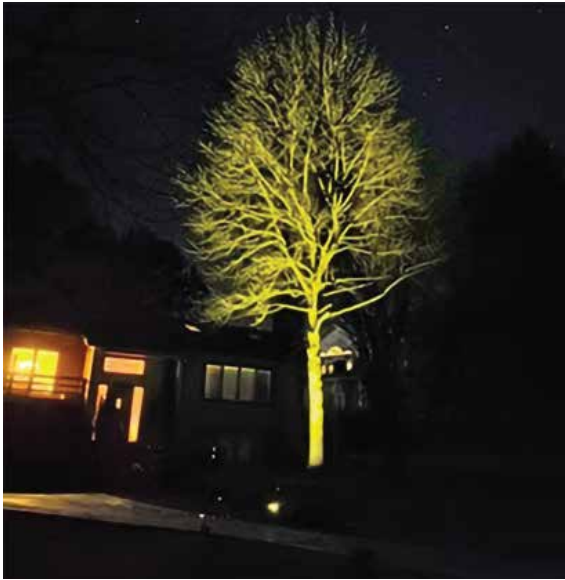

ROSE Pro RGBW EZ-SL 3.0 RGBW 512

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.



Technical Data

Wattage	24/36W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	8x 3535LED CRI>80
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Silicone rubber
Gasket	Electronic power supply(DC24V)
Power cable	Neoprene cable 5x0.75
Gross weight	2.15 Kg
Packaging	32*32*42cm 4PCS 8.2Kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
RGBW			
24W	792.0	33.00	15°
			24°
36W	1188.0		36°
			60°
			40*70°

Finish color options:


Textured Grey
RAL 9006

Anthracite Grey
RAL 7024

Matt Black
(on request)

Bronze
RAL 8019

* Customizable in different finishing colors

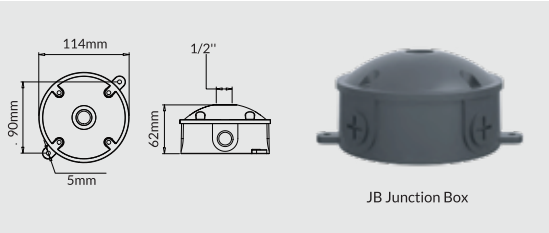

Technical Features




Technical Data

Wattage	3/6/8W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included

ROSE Mini

EZ-SL 1.2

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

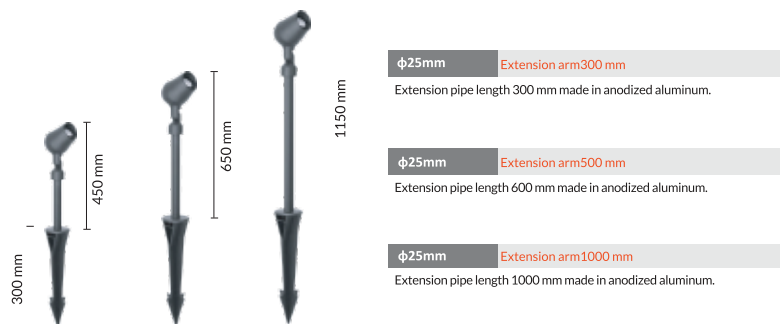

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
3W COB	240.0	80.0	15°
6W COB	480.0		24°
8W COB	640.0		36°
			60°
			40°*70°


2700/4000/5000K CCT available on request

Finish color options:

Textured Grey RAL 9006	Anthracite Grey RAL 7024	Matt Black (on request)
Bronze RAL 8019	* Customizable in different finishing colors	

Option


*Different types of light shields can be replaced on site

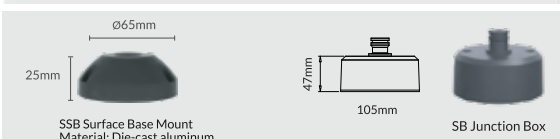



ROSE EZ-SL 2.2

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

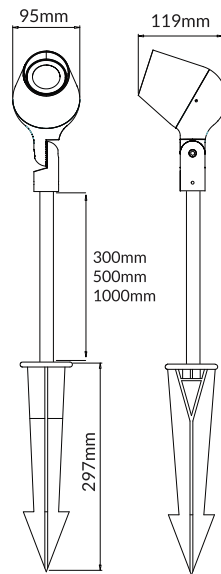

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
15W COB	1440.0		24°
20W COB	1920.0		36°
			60°
			40°*70°

2700/4000/5000K CCT available on request

Finish color options:

-  Textured Grey
RAL 9006
-  Anthracite Grey
RAL 7024
-  Matt Black
(on request)
-  Bronze
RAL 8019

* Customizable in different finishing colors

Technical Features




Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching:	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Power cables	Neoprene cable 3x0.75
Gross weight	1.2 Kg
Packaging	33*27*31cm(6Pcs) 6.5kg

φ25mm	Extension arm 300 mm
Extension pipe length 300 mm made in anodized aluminum.	
φ25mm	Extension arm 500 mm
Extension pipe length 600 mm made in anodized aluminum.	
φ25mm	Extension arm 1000 mm
Extension pipe length 900 mm made in anodized aluminum.	



OPTION

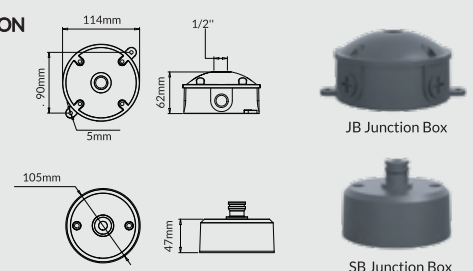


JB Junction Box

SB Junction Box



ROSE Pro EZ-SL 3.2

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

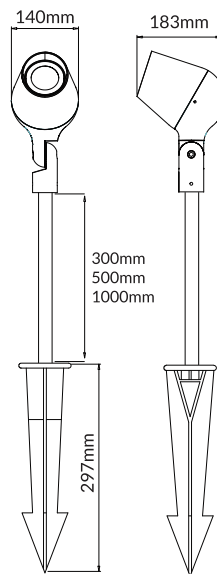



Technical Features



Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching:	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

φ25mm	Extension arm 300 mm
Extension pipe length 300 mm made in anodized aluminum.	
φ25mm	Extension arm 500 mm
Extension pipe length 600 mm made in anodized aluminum.	
φ25mm	Extension arm 1000 mm
Extension pipe length 900 mm made in anodized aluminum.	

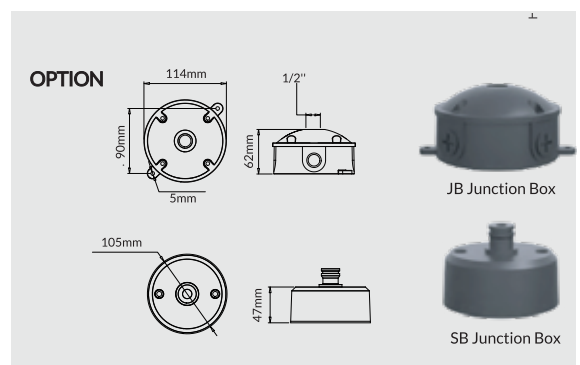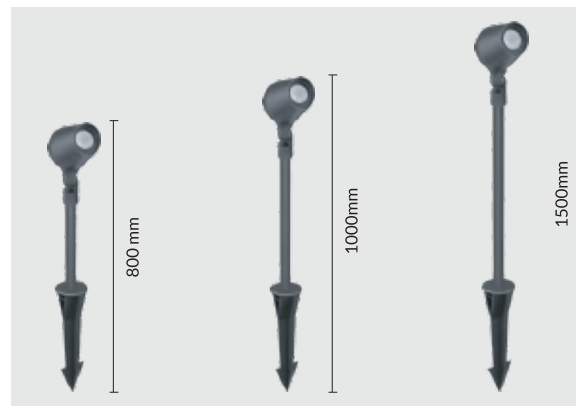

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
40W COB	4000.0		24°
60W COB	6000.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request

Finish color options:

	Textured Grey RAL 9006		Anthracite Grey RAL 7024		Matt Black (on request)
	Bronze RAL 8019	* Customizable in different finishing colors			

Technical Features




Technical Data

Wattage	3/6/8W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching:	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	0.35 Kg
Packaging size	41*21*41cm(20pcs) 8.6kg

ROSE Mini EZ-SL 1.3




Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.

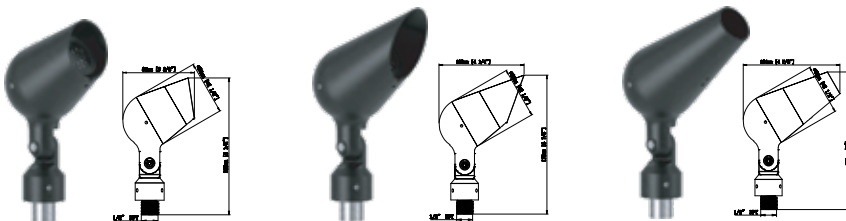


light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
3W COB	240.0	80.0	15°
6W COB	480.0		24°
8W COB	640.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request


Option



OPTION



TM Tree Mount 1.0
Material: Polyester + aluminum length:2m



TM Tree Mount 2.0
Material: 304 stainless steel ring + die-casting aluminum waterproof box



Tree Ring Installation

ROSE EZ-SL 2.3

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
15W COB	1440.0		24°
20W COB	1920.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7024
- Matt Black
(on request)
- Bronze
RAL 8019

* Customizable in different finishing colors.

Different tree ring sizes can be customized according to needs

Technical Features

IP66

IK06

CE

CB


5
YEARS

III


Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching: MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

OPTION



TM Tree Mount 1.0
Material: Polyester + aluminum length:2m



TM Tree Mount 2.0
Material: 304 stainless steel ring + die-casting aluminum waterproof box





Tree Ring Installation

ROSE Pro EZ-SL 3.3

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	3000.0	100.00	15°
15W COB	4000.0		24°
20W COB	6000.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7024
- Matt Black
(on request)
- Bronze
RAL 8019

* Customizable in different finishing colors

Different tree ring sizes can be customized according to needs


Technical Features




Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Standard Deviation Color Matching:	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

OPTION



TM Tree Mount 1.0
Material: Polyester + aluminum length:2m



TM Tree Mount 2.0
Material: 304 stainless steel ring + die-casting aluminum waterproof box






ROSE

EZ-SL 2.4

Luminaire Suitable For Pole Mounting In Single Or Multiple Combinations

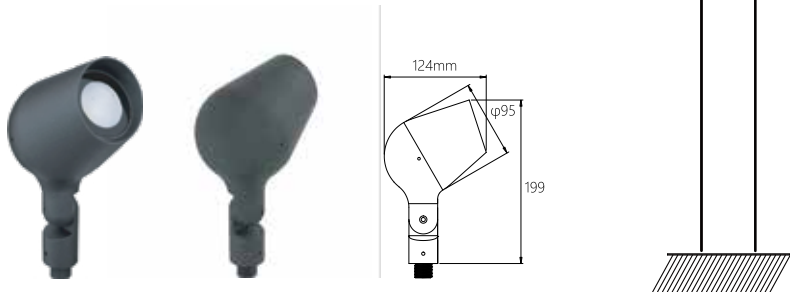

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
15W COB	1440.0		24°
20W COB	1920.0		36°
			60°
			40°*70°

2700/4000/5000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (onrequest)
- Bronze RAL8019

Customizable in different finishing colors

*Can be drilled on-site, ϕ 30mm, flexible combination.

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

Technical Features



Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1x COB CRI>90
Standard Deviation Color Matching	:MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

OPTION



Coupler


Suitable to be used with poles diam. min 60 mm and diam. max 200 mm. Can be positioned on various staggered levels or on a single level, with the same pole. Made in phospho chromatised and polyester powder coated dia-cast copper-free aluminum material.



ROSE Pro

EZ-SL 3.4

Luminaire Suitable For Pole Mounting In Single Or Multiple Combinations

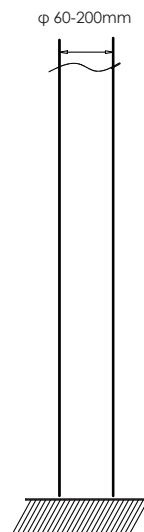

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
40W COB	4000.0		24°
60W COB	6000.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

*Can be drilled on-site, 30mm, flexible combination.

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions


Technical Features



Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COBCRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

OPTION

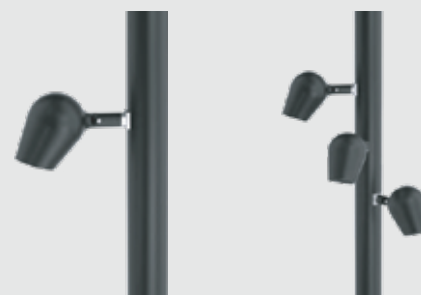

Coupler

Suitable to be used with poles diam. min 60 mm and diam. max 200 mm. Can be positioned on various staggered levels or on a single level on the same pole. Made in phospho chromatised and polyester powder coated die-cast copper-free aluminum material.



ROSE

EZ-SL 2.5

Overhead installation



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
15W COB	1440.0		24°
20W COB	1920.0		36°
			60°
			40°*70°

2700/4000/5000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions


Technical Features



Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC 120-277V)/(DC 12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31 cm (6Pcs) 6.5kg

OPTION

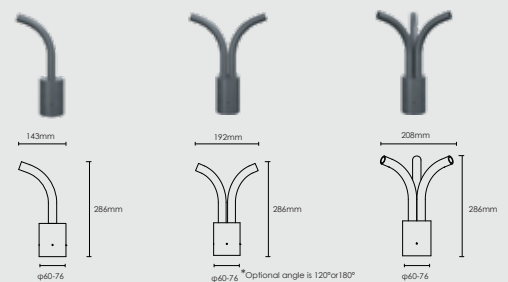

Candestick

Material: steel
Suitable for 60-76mm pole



ROSE Pro

EZ-SL 3.5

Overhead installation



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
			24°
40W COB	4000.0		36°
			60°
60W COB	6000.0		40°/70°

2700/4000/5000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
 ■ Anthracite Grey RAL7024
 ■ Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP66

IK06

CE

CB


5 YEARS



Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

OPTION

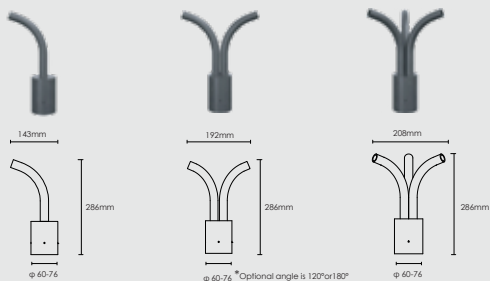

Candestick



Material: steel
Suitable for 60-76mm pole



ROSE Pro

EZ-SL 3.6

Flange installation

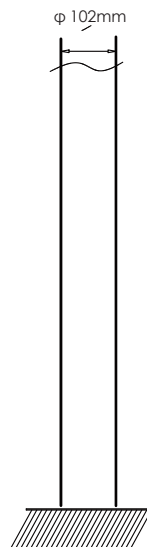

Technical Features




Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COBCRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packaging size	32*32*42cm 4PCS 8.6kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
40W COB	4000.0		24°
60W COB	6000.0		36°
			60°
			40*70°

2700/4000/5000K CCT available on request

Finish color options :



Customizable in different finishing colors

OPTION




Unilateral flange
Material: Die cast aluminum



Bilateral flange





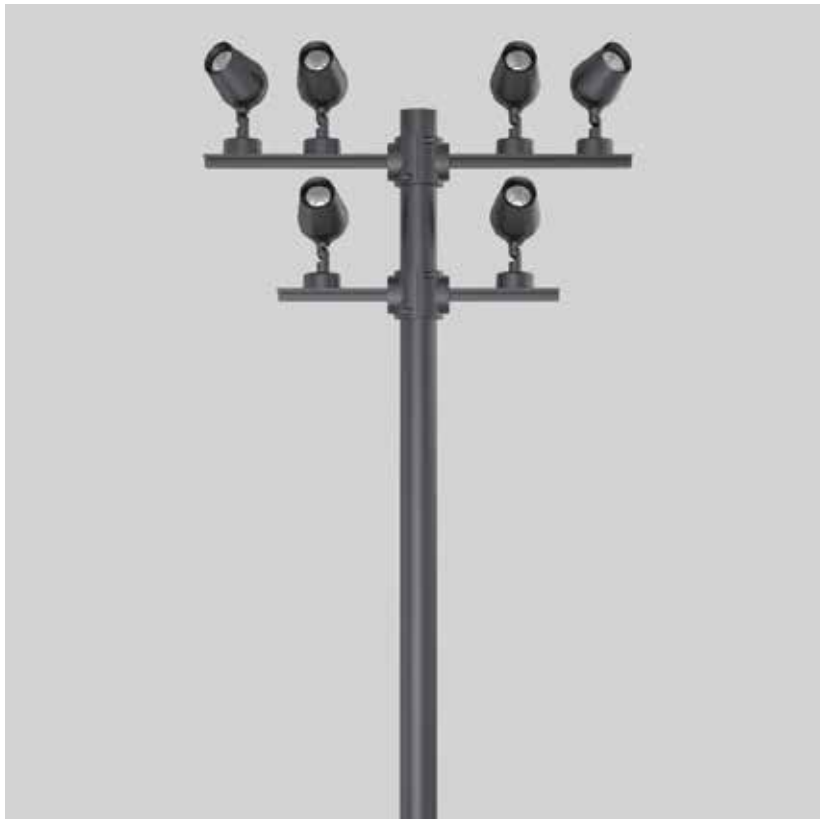

ROSE Pro

EZ-SL 3.7

Flange (bracket) installation

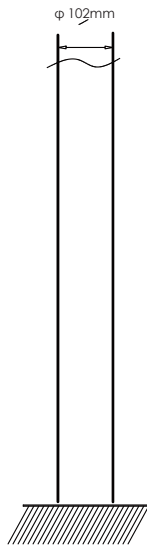

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
30W COB	3000.0	100.00	15°
40W COB	4000.0		24°
60W COB	6000.0		36°
			60°
			40°*70°

2700/4000/5000K CCT available on request

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions


Technical Features




Technical Data

Wattage	30/40/60W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC 120-277V)/(DC 12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	2.15 Kg
Packagingsize	32*32*42cm 4PCS 8.6kg

OPTION





Material: Die cast aluminum/aluminum profile





ROSE EZ-SL 2.6

Sign Light

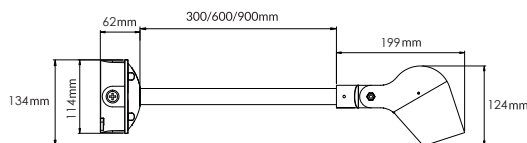

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
10W COB	960.0	96.00	15°
15W COB	1440.0		24°
20W COB	1920.0		36°
			60°
			40°/70°

2700/4000/5000K CCT available on request

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(onrequest)

Bronze
RAL8019

Customizable in different finishing colors


Technical Features



Technical Data

Wattage	10/15/20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CRI>90
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or (AC120-277V)/(DC12-24V)
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	1.2 Kg
Packaging size	33*27*31cm(6Pcs) 6.5kg

OPTION

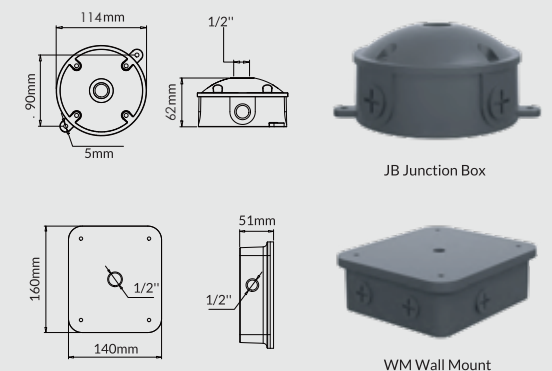

Extension arm


Material: Aluminum profile
Specification: Thickness 4mm, ϕ 25mm
*Length can be customized





EZ-OK

The LTOK LED area/site luminaire delivers exceptional performance in a scalable, low-profile design. The precision engineered optics provide uniform illumination to walkways, parking lots, roadways, building areas and security lighting applications. Backed by a five-year limited warranty, the LTOK LED area/site luminaire is the LED answer to your area and site lighting needs.

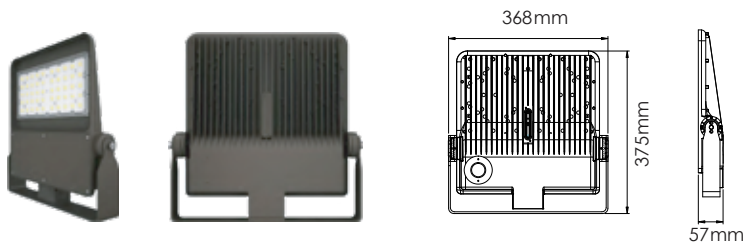

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
LT-OK-100W	14000.0	140.0	Symmetry 135°
LT-OK-150W	21000.0		Asymmetric TYPE III (73x149°)
LT-OK-200W	28000.0		Asymmetric TYPE IV (86x153°)

3000/4000K CCT available on request

Finish color options :

Textured Grey RAL 9006
 Anthracite Grey RAL7024
 Matt Black (onrequest)

Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65

IK06




5 YEARS




Technical Data

Wattage	100/150/200W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	144/200/288 x 3030LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	5.5 Kg

OPTION



Photocell




Wall Mount



EZ-OK

The LTOK LED area/site luminaire delivers exceptional performance in a scalable, low-profile design. The precision engineered optics provide uniform illumination to walkways, parking lots, roadways, building areas and security lighting applications. Backed by a five-year limited warranty, the LTOK LED area/site luminaire is the LED answer to your area and site lighting needs.

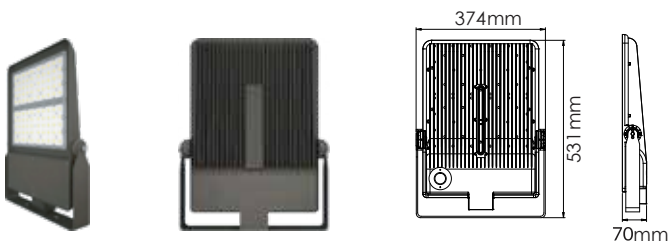

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
LT-OK-300W	42000.0	140.0	Symmetry 135° Asymmetric TYPE III (73x149°) Asymmetric TYPE IV (86x153°)

3000/4000K CCT available on request

Finish color options :

Textured Grey RAL 9006
 Anthracite Grey RAL7024
 Matt Black (on request)

Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65

IK06

CE

5 YEARS





Technical Data

Wattage	300W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	464 x 3030LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	0.5 mt. neoprene power cable included
Gross weight	8.4Kg

OPTION



Photocell

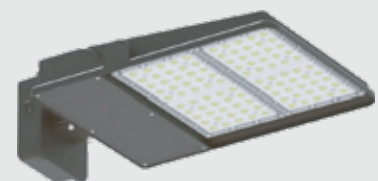

Wall Mount



BOLLARDS AND URBAN LIGHTING



LAUGH

EZ-BL

A series of LED light building elements with asymmetrical light distribution. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-BL-12W	960.0	80.0	Asymmetric (70x150°)

3000/4000K CCT available on request Unilateral light output

Finish color options :		
 Textured Grey RAL 9006	 Anthracite Grey RAL7024	 Matt Black (onrequest)
 Bronze RAL8019		

Customizable in different finishing colors


Technical Features



Technical Data

Wattage	12W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	4x5050LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	(0.6m)4.5 Kg (0.8m)5.5 Kg (1m)6.5 Kg
Package size	(0.6m)66*23*22cm (0.8m)86*23*22cm (1m)106*23*22cm

OPTION

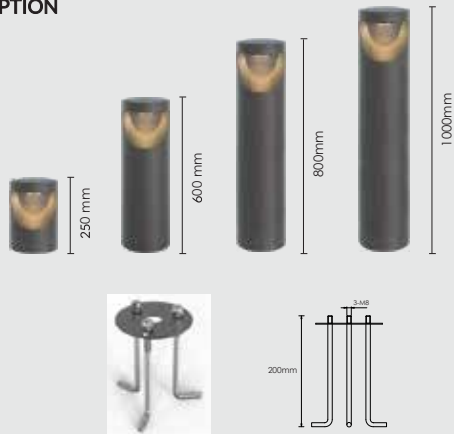

Concrete anchor 1023
Material: steel
*Need to be purchased separately

Technical Features



Technical Data

Wattage	24W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	8x5050LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	(0.6m)4.5 Kg (0.8m)5.5 Kg (1m)6.5 Kg
Package size	(0.6m)66*23*22cm (0.8m)86*23*22cm (1m)106*23*22cm

LAUGH EZ-BL

A series of LED light building elements with asymmetrical light distribution. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-BL-24W	1920.0	80.0	Asymmetric 2*(70x150°)

3000/4000K CCT available on request

Bilateral light output

Finish color options :

Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (onrequest)
Bronze RAL8019		

Customizable in different finishing colors

OPTION



Concrete anchor 1023
Material: steel
*Need to be purchased separately

Technical Features



Technical Data

Wattage	12W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	18x2835LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	(0.6m)4.5 Kg (0.8m)5.5 Kg (1m)6.5 Kg
Package size	(0.6m)66*23*22cm (0.8m)86*23*22cm (1m)106*23*22cm

ECLIPSE

EZ-YS

Super comfort, no glare at all 180° and 360° symmetrical light distribution Die-cast aluminum fixture with polyester powder coating on the surface IK08 IP65 protection level Multiple installation options




light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-12W	497.0	42.0	Symmetry 180°

3000/4000K CCT available on request

Finish color options :

Customizable in different finishing colors

OPTION



Concrete anchor 1023
Material: steel
*Need to be purchased separately

Technical Features



Technical Data

Wattage	24W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body + Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	24x2835LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	(0.6m)4.5 Kg (0.8m)5.5 Kg (1m)6.5 Kg
Package size	(0.6m)66*23*22cm (0.8m)86*23*22cm (1m)106*23*22cm

ECLIPSE EZ-YS

Super comfort, no glare at all 180° and 360° symmetrical light distribution Die-cast aluminum fixture with polyester powder coating on the surface IK08 IP65 protection level Multiple installation options




light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-24W	1008.0	42.0	Symmetry (360°)

3000/4000K CCT available on request

Finish color options :

Customizable in different finishing colors

OPTION



Concrete anchor 1023
Material: steel
*Need to be purchased separately



ECLIPSE

EZ-YS

Super comfort, no glare at all 180° and 360° symmetrical light distribution Die-cast aluminum fixture with polyester powder coating on the surface IK08 IP65 protection level Multiple installation options



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-10W	700.0	70.0	Symmetry 360°

3000/4000K CCT available on request

Finish color options :

-  Textured Grey RAL 9006
-  Anthracite Grey RAL7024
-  Matt Black (on request)
-  Bronze RAL8019

Customizable in different finishing colors

EZZOLIGHTS

Ezzolights by Ezzenics | Your Complete Lighting Solutions



Technical Features



Technical Data

Wattage	10W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	24x2835LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included

OPTION

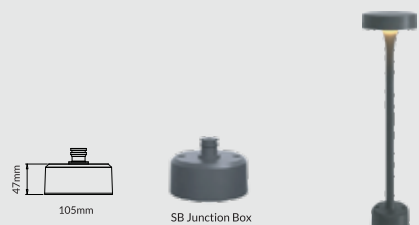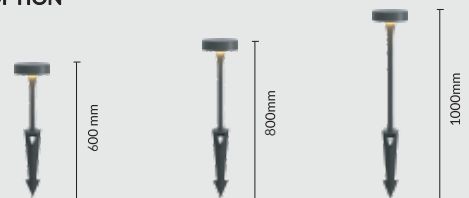




ROSE

EZ-SL BOLLARD LIGHT 1.0

Small bollards for private gardens with various sizes and angles to choose from.

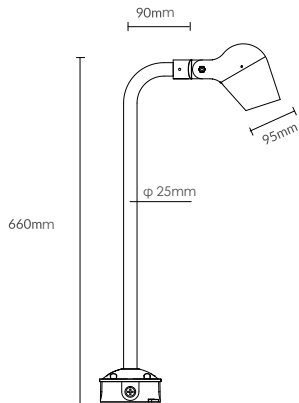

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
7W COB	700.0	100.0	15° 24° 36° 60° 40°-70°

2700/4000/5000K CCT available on request

Finish color options :		
Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (on request)
Bronze RAL8019		

Customizable in different finishing colors

Technical Features



Technical data

Wattage	7W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included

OPTION






ROSE

EZ-SL BOLLARD LIGHT 2.0

Small bollards for private gardens with various sizes and angles to choose from.

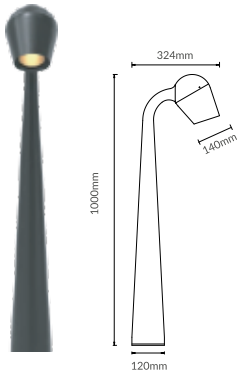

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
3000°K warm-white			
20W COB	2000.0	100.0	 15°  24°  36°  60°  40°-70°
2700/4000/5000K CCT available on request			

Finish color options :

- 

Textured Grey
RAL 9006
- 

Anthracite Grey
RAL7024
- 

Matt Black
(on request)
- 

Bronze
RAL8019

Customizable in different finishing colors

Technical Features

IP66

IK06

CE

CB

5 YEARS






Technical data

Wattage	20W
IP Rating	IP66
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1xCOB CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply AC120-277V or DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	4.5 Kg

OPTION



Concrete anchor 1023
Material: steel
*Need to be purchased separately

Technical Features




Technical data

Wattage	10W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	24x2835LED CRI>80
Standard Deviation Color Matching	:MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	2 Kg

SHADOW EZ-YZ

The luminaire is designed on the principle of a reflective three-screen system, which directs the light downwards. The screens have a matte, white, lacquered inside, which diffuses the light so that it becomes comfortable to look at.

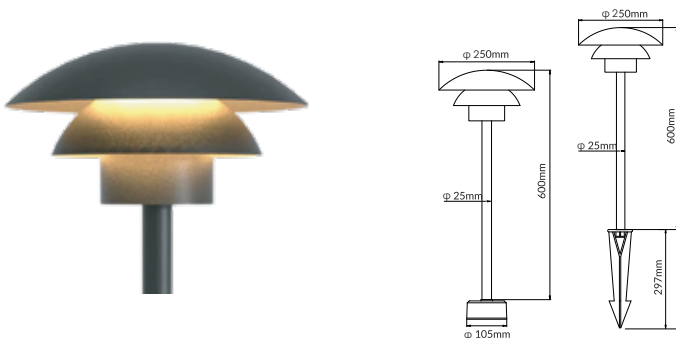

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-10W	464.0	46.4	Indirect luminescence


3000/4000K CCT available on request

Finish color options :

Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (on request)
Bronze RAL8019		

Customizable in different finishing colors

OPTION

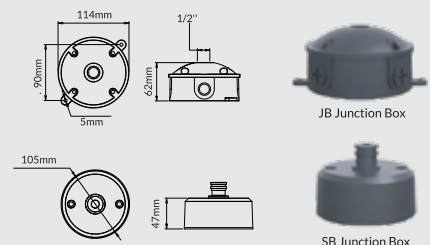




SHADOW

EZ-YZ

The luminaire is designed on the principle of a reflective three-screen system, which directs the light downwards. The screens have a matte, white, lacquered inside, which diffuses the light so that it becomes comfortable to look at.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-YS-20W	928.0	46.4	Indirect luminescence

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (onrequest)
- Bronze RAL8019

Customizable in different finishing colors

Technical Features

IP65

IK06

CE

5 YEARS



Technical data

Wattage	20W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	24x2835LED CRI> 80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	2 Kg

OPTION



φ 60mm



φ 76mm

Material: Steel, surface hot-dip galvanized treatment and polyester powder spraying

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

STEP LIGHT





STEP LIGHT

EZ-TJ-Y512

Lighting system for walkways designed for use with LED light sources to ensure high visual comfort. Wall installation. Built-in LED driver



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
LT-TJ-F512-6W	464.0	76.0	Asymmetric

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (on request)
- Bronze RAL8019

Customizable in different finishing colors


Technical Features




Technical data

Wattage	6W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	12x2835LED CRI>80
Standard Deviation Color Matching	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

Polar Coordinate Light Distribution Curve

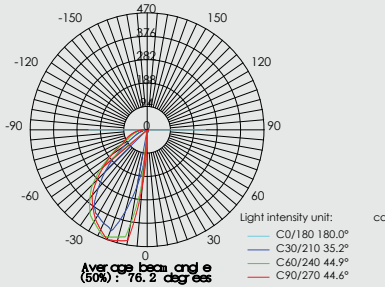

Cartesian coordinate Light distribution curve






STEP LIGHT

EZ-TJ-F512

Lighting system for walkways designed for use with LED light sources to ensure high visual comfort. Wall installation. Built-in LED driver



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-TJ-F512-6W	464.0	76.0	Asymmetric

3000/4000K CCT available on request

Finish color options :

-  Textured Grey
RAL 9006
-  Anthracite Grey
RAL7024
-  Matt Black
(on request)
-  Bronze
RAL8019

Customizable in different finishing colors

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions


Technical Features




Technical data

Wattage	6W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	12x2835LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

Polar Coordinate Light Distribution Curve

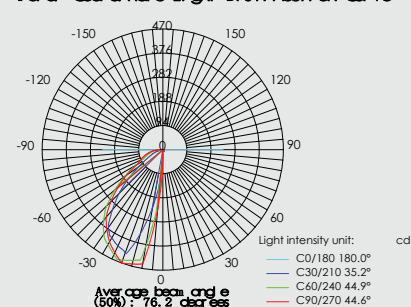

Cartesian coordinate light distribution curve





PORTABLE TABLE LIGHTS

EZZOLIGHTS


Ezzolights by Ezzogenics | Your Complete Lighting Solutions



ECLIPSE

EZ-YS

Lighting system for walkways designed for use with LED light sources to ensure high visual comfort.Wall installation. Built-in LED driver

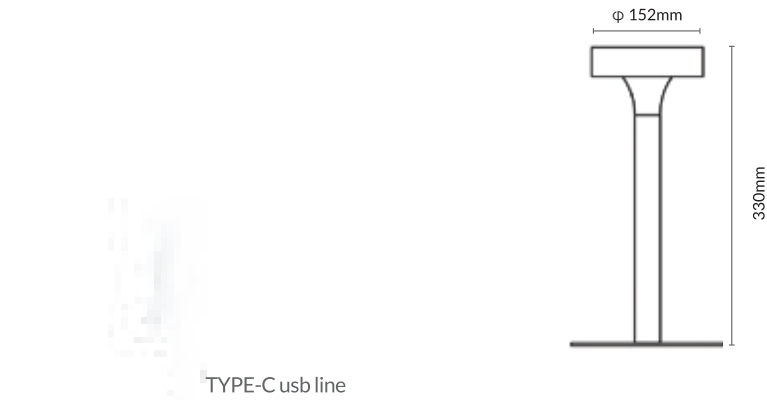

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-YS-2.5W	100.0	40.0	Symmetry 360°

3000/4000K CCT available on request

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

Technical Features



Technical data

Wattage	2.5W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	12x2835 LED CRI>90
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Battery	5000MA.H
Standby time	8h
Glass	Tempered
Dimming	10-100%
Weight	2kg


Option



Black

Rust

Red

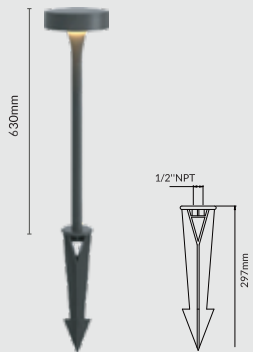

G5 Ground Stake
Material: PC



URBAN LIGHTS

EZZOLIGHTS

Ezzolights by Ezzogenics | Your Complete Lighting Solutions

Technical Features

IP65

IK08

CE


5 YEARS



SUNFLOWER

EZ-1885-30/50W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	3390.0	113.0	105°
EZ- 1885-50W	5650.0		

3000/4000K CCT available on request

Finish color options :

-  Textured Grey
RAL 9006
-  Anthracite Grey
RAL7024
-  Matt Black
(on request)
-  Bronze
RAL8019

Customizable in different finishing colors



Technical data

Wattage	30/50W
IP Rating	IP 65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request
Installation type	Smallpox

Technical Features

IP65

IK08

CE

5 YEARS



SUNFLOWER

EZ-1885-30/50W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	3390.0	113.0	105°
EZ- 1885-50W	5650.0		

3000/4000K CCT available on request

Finish color options :

Textured Grey
RAL 9006

Anthracite Grey
RAL7024

Matt Black
(on request)

Bronze
RAL8019

Customizable in different finishing colors



Technical data


Wattage	30/50W
IP Rating	IP 65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg
Surge Protection 6 KV	
Notes	Can on request DALI version available on request
Installation type	Pendant



SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V

3000/4000K CCT available on request

Finish color options :

-  Textured Grey
RAL 9006
-  Anthracite Grey
RAL7024
-  Matt Black
(on request)
-  Bronze
RAL8019

Customizable in different finishing colors


Technical Features



Technical data

Wattage	30/50/70/90W
IP Rating	IP 65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	8 Kg
Surge Protection	6 KV
Notes	Can on request DALI version available on request
Installation type	Wall

Option

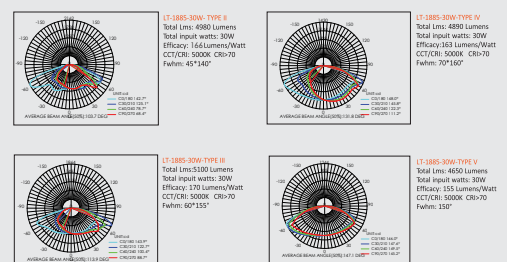




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.

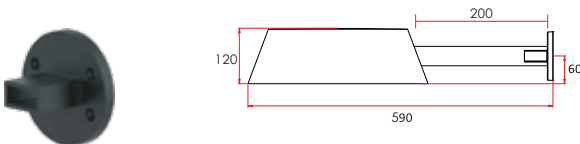

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V

3000/4000K CCT available on request

Finish color options :

-  Textured Grey
RAL 9006
-  Anthracite Grey
RAL7024
-  Matt Black
(on request)
-  Bronze
RAL8019

Customizable in different finishing colors


Technical Features



Technical data

Wattage	30/50/70/90W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.5 Kg
Surge Protection	6 KV
Notes	Can on request DALI version available on request
Installation type	Wall

Option

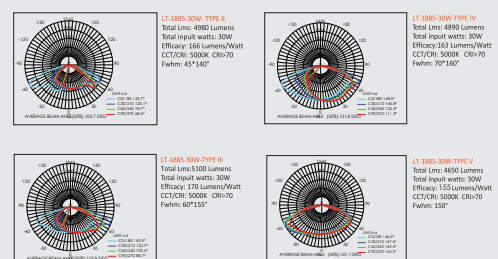




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V

3000/4000K CCT available on request

Finish color options :		
 Textured Grey RAL 9006	 Anthracite Grey RAL7024	 Matt Black (on request)
 Bronze RAL8019		

Customizable in different finishing colors

Technical Features

IP65

IK08

CE

5 YEARS






Technical data

Wattage	30/50/70/90W
IP Rating	IP 65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.5Kg
Surge Protection	6 KV
Notes	Can on request DALI version available on request
Installation type	Overhead

Option

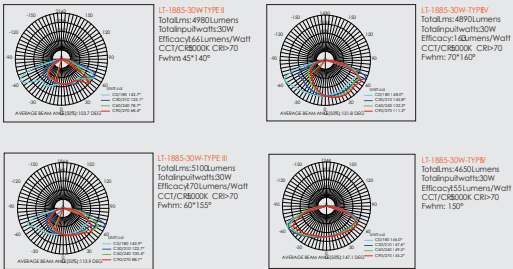




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V

3000/4000K CCT available on request

Finish color options :

-  Textured Grey
RAL 9006
-  Anthracite Grey
RAL7024
-  Matt Black
(on request)
-  Bronze
RAL8019

Customizable in different finishing colors


Technical Features



Technical data

Wattage	30/50/70/90W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	8.1Kg
Surge Protection	6 KV
Notes	Can on request DALI version available on request
Installation type	Slip Fitter

Option

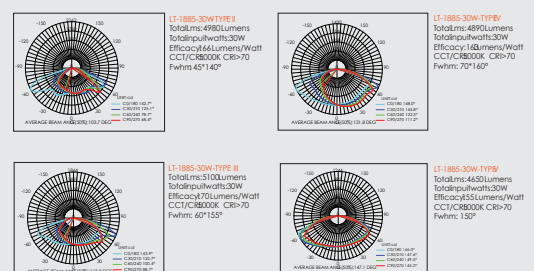




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V

3000/4000K CCT available on request

Finish color options :

-  Textured Grey
RAL 9006
-  Anthracite Grey
RAL7024
-  Matt Black
(on request)
-  Bronze
RAL8019

Customizable in different finishing colors


Technical Features



Technical data

Wattage	30/50/70/90W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching	:MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg
Surge Protection	6 KV
Notes	Can on request DALI version available on request
Installation type	Pole Mount

Option

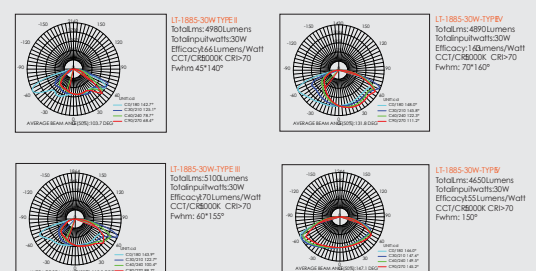




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.

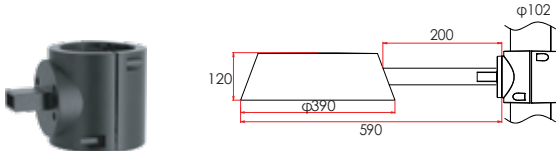

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V

3000/4000K CCT available on request

Finish color options :

-  Textured Grey
RAL 9006
-  Anthracite Grey
RAL7024
-  Matt Black
(on request)
-  Bronze
RAL8019

Customizable in different finishing colors


Technical Features



Technical data

Wattage	30/50/70/90W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.5 Kg
Surge Protection	6 KV
Notes	Can on request DALI version available on request
Installation type	Pole Mount

Option

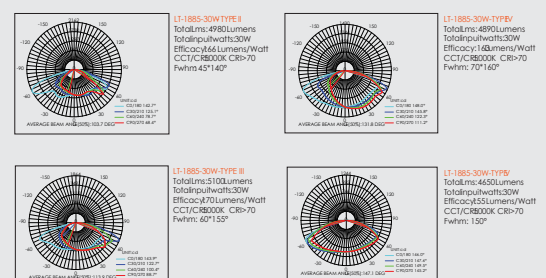




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.

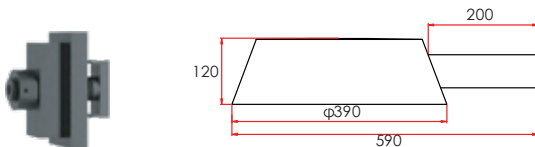

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V

3000/4000K CCT available on request

Finish color options :

-  Textured Grey
RAL 9006
-  Anthracite Grey
RAL7024
-  Matt Black
(on request)
-  Bronze
RAL8019

Customizable in different finishing colors


Technical Features



Technical data

Wattage	30/50/70/90W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg
Surge Protection	6 KV
Notes	Can on request DALI version available on request
Installation type	Pole Mount

Option

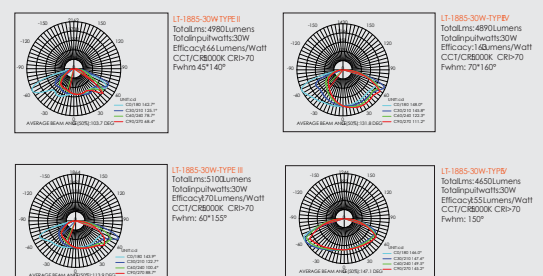




SUNFLOWER

EZ-1885-30/50/70/90W

SunFlowers blurs the lines between outdoor and indoor luminaires. A curb to cube family approach puts the focus on a variety of mounting options to cover a range of exterior and interior lighting needs. From roadways to pathways, public parks to university campuses, parking lots to lobbies, Sunflower has you covered. Mix and match lighting requirements with a consistent design aesthetic – outdoors and in.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- 1885-30W	4950.0	165.0	Type II
EZ- 1885-50W	8250.0		Type III
EZ- 1885-70W	11550.0		Type IV
EZ- 1885-90W	14850.0		Type V

3000/4000K CCT available on request

Finish color options :

- Textured Grey
RAL 9006
- Anthracite Grey
RAL7024
- Matt Black
(on request)
- Bronze
RAL8019

Customizable in different finishing colors


Technical Features




Technical data

Wattage	30/50/70/90W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg
Surge Protection	6 KV
Notes	Can on request DALI version available on request
Installation type	Catenary Mount


Option




LT-1885-30W-TYPE II
TotalLms:4980Lumens
Totalinputwatts:30W
Efficacy:166Lumens/Watt
CCT/CRI8000K CRI>70
Fwhm: 45° x 45°



LT-1885-50W-TYPE III
TotalLms:8250Lumens
Totalinputwatts:50W
Efficacy:165Lumens/Watt
CCT/CRI8000K CRI>70
Fwhm: 60° x 60°



LT-1885-70W-TYPE IV
TotalLms:11550Lumens
Totalinputwatts:70W
Efficacy:165Lumens/Watt
CCT/CRI8000K CRI>70
Fwhm: 60° x 150°



LT-1885-90W-TYPE V
TotalLms:14850Lumens
Totalinputwatts:90W
Efficacy:165Lumens/Watt
CCT/CRI8000K CRI>70
Fwhm: 70° x 160°



PARASOL

EZ-DZ-50/70/100W

Die-cast aluminium body (EN 47100). Double layer polyester powder paint resistant to corrosion and salt spray fog. Silicone rubber gaskets. AISI 316 stainless steel external screws. Driver protected against voltage surges. PMMA lenses for LEDs. Screen made of 5mm thermal-shock resistant tempered glass.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- OS-50W	6000.0	120.0	Type II
EZ- OS-70W	8400.0		Type III
EZ- OS-100W	1200.0		Type IV
			Type IV Wide
			Type V Square Medium
			Type V Wide (Round)

3000/4000K CCT available on request

Finish color options :

- Textured Grey
RAL 9006
- Anthracite Grey
RAL7024
- Matt Black
(on request)
- Bronze
RAL8019

Customizable in different finishing colors


Technical Features



Technical data

Wattage	50/70/100W
IP Rating	IP 6 6
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	7.3 Kg
Surge Protection	6 KV
Notes	Can on request DALI version available on request

Option

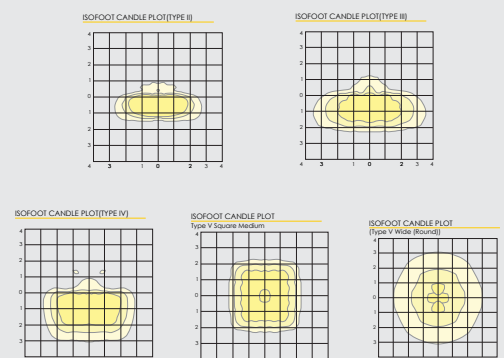

Technical Features

IP65

IK08

CE

5 YEARS



Technical data


Wattage	24W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body + Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	8x5050LED CRI>80
Standard Deviation Color Matching :MacAdam step	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Neoprene cable 3x0.75
Power cable	1 mt. neoprene power cable included

Lamp body material: Polycarbonate powder spraying on the surface of aluminum profile

LAUGH

EZ-BL-UT-24W

A series of LED light building elements with asymmetrical light distribution. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-BL-UT-24W	1920.0	80.0	Asymmetric (70x150°)
3000/4000K CCT available on request		Unilateral light output	

Finish color options :

Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (on request)
Bronze RAL8019		

Customizable in different finishing colors



Concrete anchor 1024

Material: steel

*Need to be purchased separately

Technical Features

IP65

IK08

CE

5 YEARS



Technical data


Wattage	48W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	16x5050LED CRI>80
Standard Deviation Color Matching :MacAdam step	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Neoprene cable 3x0.75
Power cable	1 mt. neoprene power cable included

Lamp body material: Polycarbonate powder spraying on the surface of aluminum profile

LAUGH

EZ-BL-UT-48W

A series of LED light building elements with asymmetrical light distribution. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances





light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-BL-UT-48W	3840.0	80.0	Asymmetric 2*(70x150°)
3000/4000K CCT available on request			Unilateral light output

Finish color options :

Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (onrequest)
Bronze RAL8019		

Customizable in different finishing colors



Concrete anchor 1024

Material: steel

*Need to be purchased separately

Technical Features

IP65

IK08

CE


5 YEARS



LAUGH

EZ-BL-UT-72W

A series of LED light building elements with asymmetrical light distribution. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-BL-UT-72W	5760.0	80.0	Asymmetric 2*(70x150°)
3000/4000K CCT available on request			Unilateral light output

Finish color options :



- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (onrequest)
- Bronze RAL8019

Customizable in different finishing colors

Technical data

Wattage	72W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	24x5050LED CRI>80
Standard Deviation Color Matching	:MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included

Lamp body material: Polycarbonate powder spraying on the surface of aluminum profile



Concrete anchor 1024

Material: steel

*Need to be purchased separately

WALL MOUNTING



Technical Features

IP65

IK06

CE


5 YEARS



POPLAR

EZ-BY

The Poplar outdoor wall sconce creates an elegant elongated column of beautifully diffused light. The Poplar is available in three sizes (20cm, 40cm, 60cm) to meet architectural scale; ideal for way-finding and general outdoor illumination. The Poplar features energy-efficient, fully dimmable integrated LED lighting (Dimming options). Available in two finishes: Bronze and Oak grain.



Technical data

Wattage	5/20/30W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Acrylic
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step	
Screws	Stainless steel
Transformer	Electronic power supply 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-BY-5W	150.0	30.0	Asymmetric
EZ-BY-20W	600.0		
EZ-BY-30W	900.0		


3000/4000K CCT available on request

Finish color options :

Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (onrequest)
Bronze RAL8019		

Customizable in different finishing colors

Option



Technical Features

IP65

IK06



CE

5 YEARS



BLADE EZ-WW-18

The contemporary aesthetic of the EZ-WW-18 outdoor wall sconce creates soft indirect, reduced-glare illumination by aiming light back against the wall for accenting architecture as well as for wayfinding.

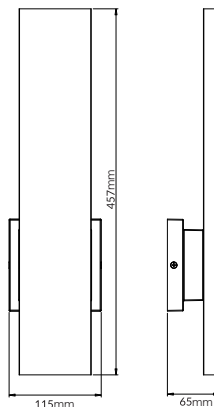

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-WW-18-20W	1200.0	60.0	Asymmetric

3000/4000K CCT available on request

Finish color options :

- Textured Grey
RAL 9006
- Anthracite Grey
RAL7024
- Matt Black
(onrequest)
- Bronze
RAL8019

Customizable in different finishing colors



Technical data

Wattage	20W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

Technical Features

IP65

IK06

CE

5 YEARS




Technical data

Wattage	12W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body +Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step	
Screws	Stainless steel
Transformer	Electronic power supply 220-240V or 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

BLADE EZ-CL

Strikingly elegant in its simplicity, LT-CL is a tubular design that creates a modern industrial look. Designed with a die-cast aluminum structure, powder coat finish, and stainless steel hardware for robust durability in harsh elements. Appropriate for commercial use. Available as Square or Round ¹⁶⁰ in three sizes



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-CL-12W	1286.0	100.0	15°
			24°
			36°


3000/4000K CCT available on request

Finish color options :

Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (onrequest)
Bronze RAL8019		

Customizable in different finishing colors

Total Lumen Output: 1286
Total Power: 11.8
Luminaire Efficacy: 109
Color Temp: 5000K
CRI: 81
BUG Rating:

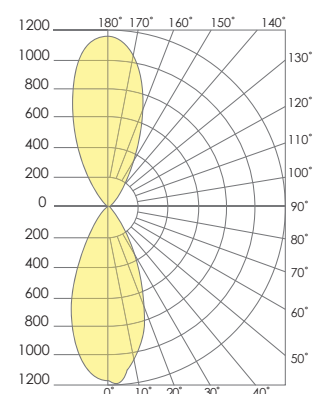

Technical Features

IP65

IK06


CE

5 YEARS



BLADE EZ-CL

Strikingly elegant in its simplicity, EZ-CL is a tubular design that creates a modern industrial look. Designed with a die-cast aluminum structure, powder coat finish, and stainless steel hardware for robust durability in harsh elements. Appropriate for commercial use. Available as Square or Round in three sizes

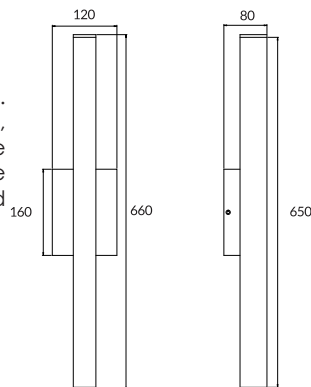

Technical data

Wattage	12W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body + Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220-240V or 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-CL-12W	1286.0	100.0	15°
			24°
			36°


3000/4000K CCT available on request

Finish color options :

Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (onrequest)
Bronze RAL8019		

Customizable in different finishing colors

Total Lumen Output:	1286
Total Power:	11.8
Luminaire Efficacy:	109
Color Temp:	3000K
CRI:	80+
BUG Rating:	B1-U4-G0

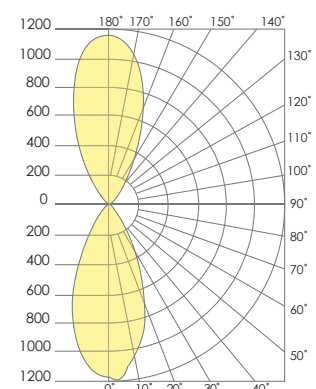

Technical Features

IP65

IK06


CE

5 YEARS



BLADE EZ-WL

Strikingly elegant in its simplicity, EZ-WL is a tubular design that creates a modern industrial look. Designed with a die-cast aluminum structure, powder coat finish, and stainless steel hardware for robust durability in harsh elements. Appropriate for commercial use. Available as Square or Round in three sizes.

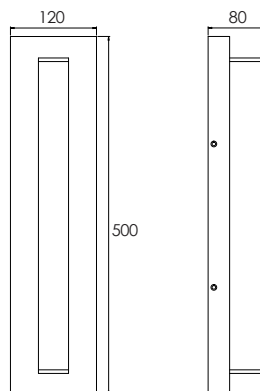

Technical data

Wattage	12W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body + Aluminum profile
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220-240V or 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Internal wiring
Gross weight	1 Kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-WL-12W	1286.0	100.0	15°
			24°
			36°


3000/4000K CCT available on request

Finish color options :

Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (onrequest)
Bronze RAL8019		

Customizable in different finishing colors

Total Lumen Output: 1286
Total Power: 11.8
Luminaire Efficacy: 109
Color Temp: 3000K
CRI: 80+
BUG Rating: B1-U4-G0

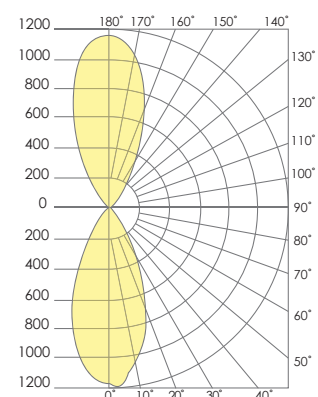

Technical Features

IP65

IK06

CE

5 YEARS


ETL

ETL




EZ-Xt-06

Heavy duty die-cast aluminum housing and door. The door frame is fully gasketed to keep out moisture and dust for the luminaire. Specular thermoplastic reflector and clear glass lens. Integral secondary heat sink to optimize thermal transfer and maximize performance and life of LED. Driver is mounted in direct contact with the casting for a low operating temperature and long life.



INTENSITY DISTRIBUTION DIAGRAM IN C PLANS



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-Xt-06-15W	1500.0	100.0	Asymmetric
EZ-Xt-06-20W	2000.0		
EZ-Xt-06-25W	2500.0		

3000/4000K CCT available on request

Finish color options :

- Textured Grey RAL 9006
- Anthracite Grey RAL7024
- Matt Black (onrequest)
- Bronze RAL8019

Customizable in different finishing colors

Technical data

Wattage	15/20/25W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1x COB CRI>80
Standard Deviation Color Matching	:MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 120-277V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Reflective cup
Power Cables	Internal wiring
Gross weight	1.2 Kg


Option



Extra swivel photocell sensor available




Stainless steel U-shaped bracket



EZZOLIGHTS
Ezzolights by Ezzogenics | Your Complete Lighting Solutions

RECESSED

FOR OUTDOOR APPLICATIONS

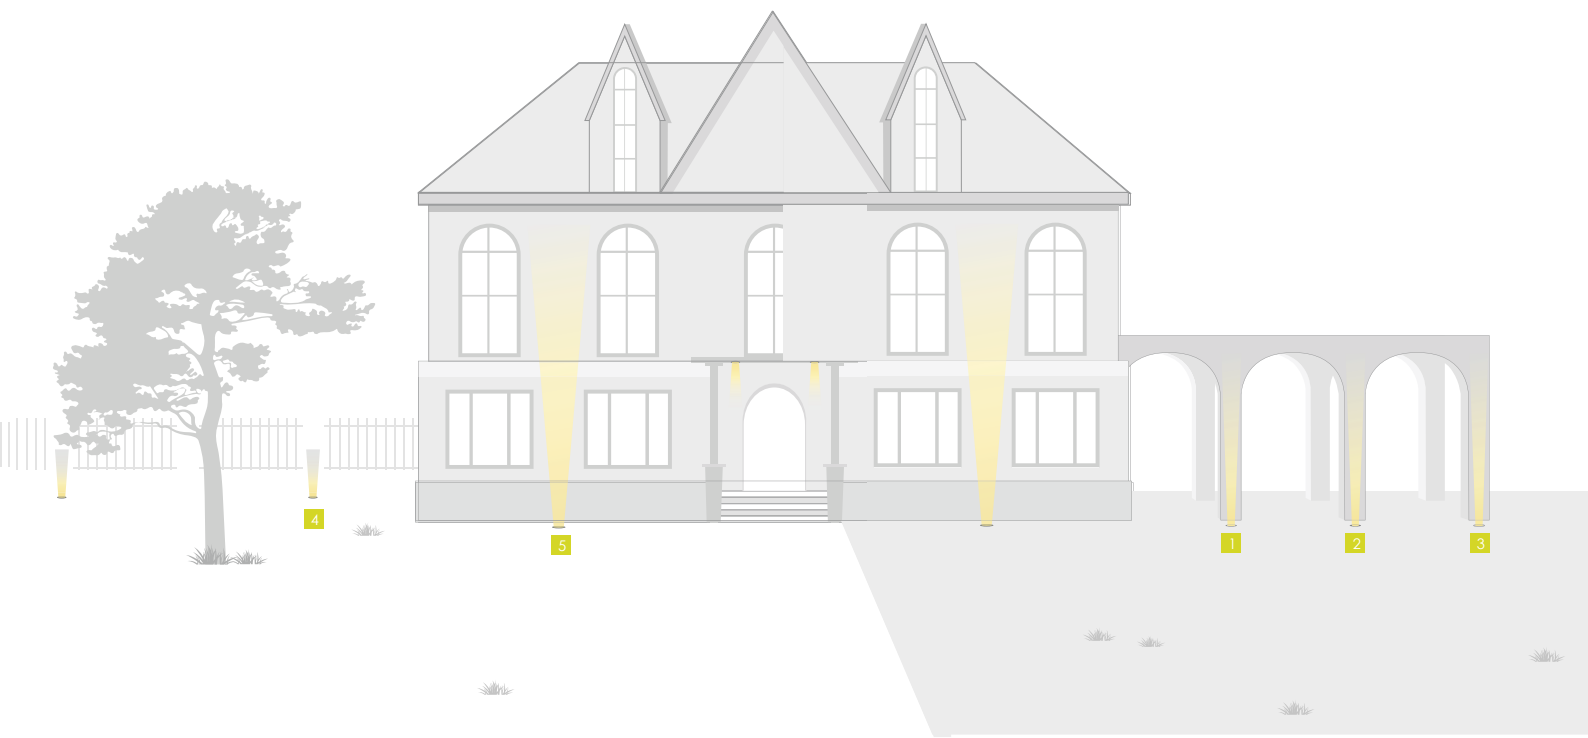

Technical Features

IP66

IK08

CE


5 YEARS

III



EZ-BM-316

Vandal resistant polycarbonate molded housing cover and lens, maximize performance and life of LED Driver is mounted in direct contact with the chamber for a low operating temperature and long life Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling.



Surface mount base


Technical data

Wattage	5W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	DC24V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Gross weight	1 Kg


light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-BM-316-5W	450.0	90.0	8/11/15/30/45/66/40*12°

3000/4000K CCT available on request


Light distribution options:



Option

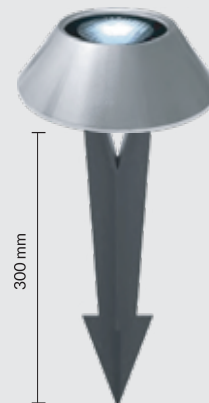

GS Ground Stake
Material: PC



Honeycomb louvre built into the lighting fixture

Technical Features

IP66


IK08

CE

5 YEARS



EZ-DMD-130-6W

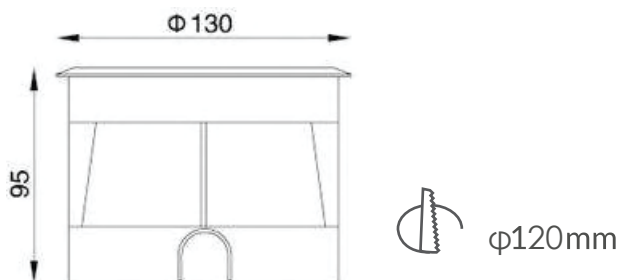


Technical data

Wattage	6W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ120mm
Gross weight	1.1 Kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-130-6W	540.0	90.0	8/15/30/45/15*60°
3000/4000K CCT available on request			

Light distribution options:



Technical Features

IP66


IK08

CE

5 YEARS



EZ-DMD-160-9W

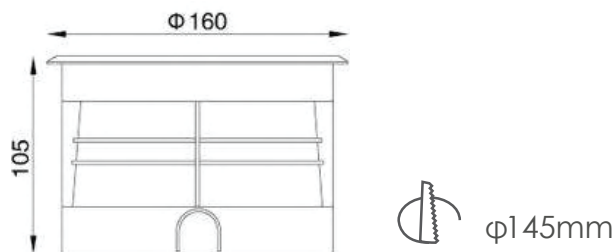


Technical data

Wattage	9W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ145mm
Gross weight	1.8 Kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-160-9W	810.0	90.0	8/15/30/45/15°60°

3000/4000K CCT available on request

Light distribution options:



S - 15° CRI 80

H (m)	Ø (m)	9W	Lux max (3000K)	color temp 42	— C0 - C180
1.00	0.28	5580			
2.00	0.56	1395			
3.00	0.84	620			
4.00	1.13	349			
5.00	1.41	223			

L - 45° CRI 80

H (m)	Ø (m)	9W	Lux max (3000K)	color temp 267	— C0 - C180
1.00	1.04	1070			
2.00	2.08	268			
3.00	3.12	119			
4.00	4.16	67			
5.00	5.20	43			

M - 30° CRI 80

H (m)	Ø (m)	9W	Lux max (3000K)	color temp 2186	— C0 - C180
1.00	0.69	1755			
2.00	1.38	439			
3.00	2.07	195			
4.00	2.76	110			
5.00	3.45	70			

Technical Features


IP66

IK08

CE

5 YEARS

EZ-DMD-230-18W

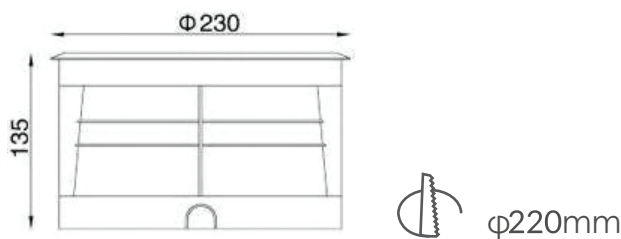


Technical data

Wattage	18W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ220mm
Gross weight	3.3 Kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-230-18W	1620.0	90.0	8/15/30/45/15*60°

3000/4000K CCT available on request

Light distribution options:



S - 15°

H (m)	Ø (m)	Lux max (3000K)	cd/klm	m525	C0 - C180
1,00	0,23	16071			
2,00	0,46	4018			
3,00	0,70	1786			
4,00	0,93	1004			
5,00	1,16	643			

L - 45°

H (m)	Ø (m)	Lux max (3000K)	cd/klm	m525	C0 - C180
1,00	0,69	2618			
2,00	1,38	655			
3,00	2,07	291			
4,00	2,76	164			
5,00	3,45	105			

Technical Features

IP66


IK08

CE

5 YEARS



EZ-DMD-230-24W

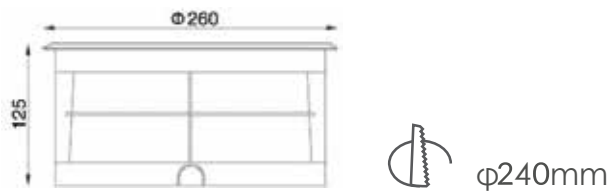





Technical data

Wattage	24W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	High-Brightness LED CRI>80
Standard Deviation Color Matching : MacAdam step 3	
Screws	Stainless steel
Transformer	AC 220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ240mm
Gross weight	4.2 Kg

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-230-24W	2160.0	90.0	8/15/30/45/15*60°

3000/4000K CCT available on request

Light distribution options:



Technical Features


IP66

IK08

CE

5
YEARS


EZ-DMD-160-7W

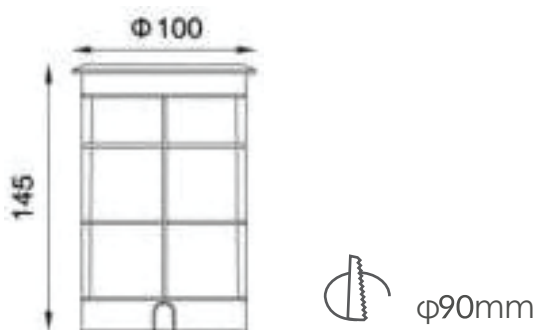

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-160-7W	630.0	90.0	15/24/45/60°

3000/4000K CCT available on request

Light distribution options:



Technical data

Wattage	7W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	1x COB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ90mm
Gross weight	1 Kg


S - 15° CRI 80

H (m)	Ø (m)	9W
1.00	0.25	3580
2.00	0.54	1395
3.00	0.84	620
4.00	1.13	349
5.00	1.41	223



L - 45° CRI 80

H (m)	Ø (m)	9W
1.00	1.04	1070
2.00	2.08	268
3.00	3.12	119
4.00	4.16	67
5.00	5.20	43



M - 30° CRI 80

H (m)	Ø (m)	9W
1.00	0.69	1755
2.00	1.38	439
3.00	2.07	195
4.00	2.76	110
5.00	3.45	70



Technical Features


IP66

IK08

CE

5
YEARS


EZ-DMD-120-7W

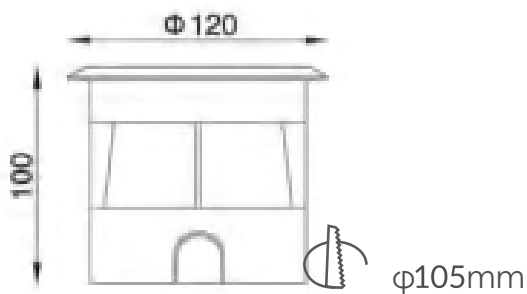

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-120-7W	630.0	90.0	15/24/45/60°

3000/4000K CCT available on request

Light distribution options:



Technical data

Wattage	7W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	1 x COB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ105mm
Gross weight	1 Kg

Technical Features


IP66

IK08

CE

5
YEARS


EZ-DMD-180-15W

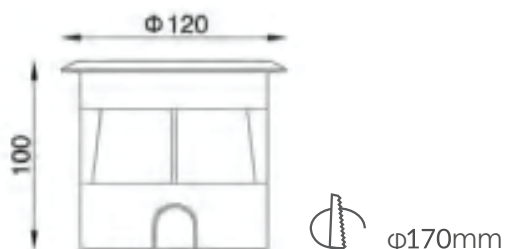

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-180-15W	1350.0	90.0	15/24/45/60°

3000/4000K CCT available on request

Light distribution options:



Technical data

Wattage	15W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	1x COB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ170mm
Gross weight	2Kg

Technical Features


IP66

IK08

CE

5
YEARS


EZ-DMD-150-10W

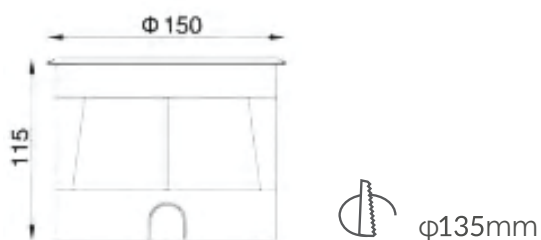

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-150-10W	900.0	90.0	15/24/45/60°

3000/4000K CCT available on request

Light distribution options:



Technical data

Wattage	10W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	1 x COB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ135mm
Gross weight	1.5Kg

Technical Features


IP66

IK08

CE

5
YEARS


EZ-DMD-260-30W

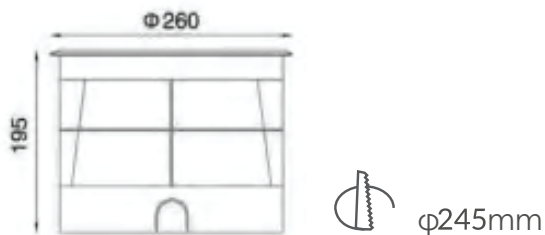

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000K white			
EZ-DMD-260-30W	2700.0	90.0	15/24/45/60°

3000/4000K CCT available on request

Light distribution options:



Technical data

Wattage	30W
IP Rating	IP66
IK Rating	IK08
Material	316 stainless steel
Coating	Stainless steel natural color
Light source	1 x COB CRI>80
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	AC220-240V
Glass	5mm tempered glass
Power cable	1 mt. neoprene power cable included
Dimension	φ245mm
Gross weight	4.2Kg

STREET LAMP






EZ-OK

EZ-OK-100/150/200W


The LTOK LED area/site luminaire delivers exceptional performance in a scalable, low-profile design. The precision engineered optics provide uniform illumination to walkways, parking lots, roadways, building areas and security lighting applications. Backed by a five-year limited warranty, the LTOK LED area/site luminaire is the LED answer to your area and site lighting needs.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ-OK-100W	14000.0	140.0	TYPE II 45°155°
EZ-OK-150W	21000.0		TYPE V 135°
EZ-OK-200W	28000.0		Asymmetric TYPE III(73x149°)
			Asymmetric TYPE IV(86x153°)

3000/4000K CCT available on request

Finish color options :



Customizable in different finishing colors


Technical Features



Technical data

Wattage	100/150/200W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	144/200/288 x 3030LED CRI>70
Standard Deviation Color Matching	:MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power Cables	Neoprene cable 3x0.75
Gross weight	5.5 Kg
Surge Protection	6 KV

Option




Photocell



EZ-OK

EZ-OK-300W

The LTOX LED area/site luminaire delivers exceptional performance in a scalable, low-profile design. The precision engineered optics provide uniform illumination to walkways, parking lots, roadways, building areas and security lighting applications. Backed by a five-year limited warranty, the LTOX LED area/site luminaire is the LED answer to your area and site lighting needs.

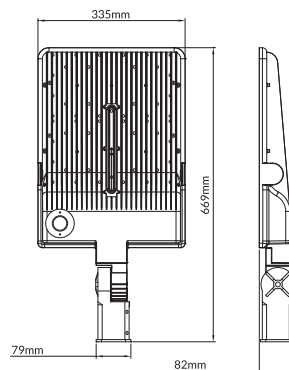

light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ-OK-300W	42000.0	140.0	TYPE II 45°155°
			TYPE V 135°
			Asymmetric TYPE III (73x149°)
			Asymmetric TYPE IV (86x153°)

3000/4000K CCT available on request

Finish color options :

-  Textured Grey
RAL 9006
-  Anthracite Grey
RAL7024
-  Matt Black
(onrequest)
-  Bronze
RAL8019

Customizable in different finishing colors


Technical Features



Technical data

Wattage	300W
IP Rating	IP65
IK Rating	IK06
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	464 x 3030LED CRI>70
Standard Deviation Color Matching :MacAdam step 3	
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	8.4Kg
Surge Protection	6 KV

Option




Photocell



EZ-OS-50/70W


Die-cast aluminium body (EN 47100). Double layer polyester powder paint resistant to corrosion and salt spray fog. Silicone rubber gaskets. AISI 316 stainless steel external screws. Driver protected against voltage surges up to 10kV. PMMA lenses for LEDs. Screen made of 5mm thermal-shock resistant tempered glass. High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ- OS-50W	6500.0	130.0	Type II
			Type III
			Type IV
			Type IV Wide
EZ- OS-70W	9100.0		Type V Square Medium
			Type V Wide (Round)

3000/4000K CCT available on request

Finish color options :



Customizable in different finishing colors

Technical Features








Technical data

Wattage	50/70W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching	:MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	3.8 Kg
Surge Protection	6 KV/10KV
Notes	Can on request DALI version available on request

Option



Photocell



Technical Features




Technical data

Wattage	100W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	4.2 Kg
Surge Protection	6 KV/10KV
Notes	Can on request DALI version available on request

EZ-OS-100W

Die-cast aluminium body (EN 47100). Double layer polyester powder paint resistant to corrosion and salt spray fog. Silicone rubber gaskets. AISI 316 stainless steel external screws. Driver protected against voltage surges up to 10kV. PMMA lenses for LEDs. Screen made of 5mm thermal-shock resistant tempered glass. High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ-OS-100W	13000.0	130.0	Type II Type III Type IV Type IV Wide Type V Square Medium Type V Wide (Round)


3000/4000K CCT available on request

Finish color options :






Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (onrequest)
Bronze RAL8019		

Customizable in different finishing colors

Option




Photocell





EZ-OS-150W

Die-cast aluminium body (EN 47100). Double layer polyester powder paint resistant to corrosion and salt spray fog. Silicone rubber gaskets. AISI 316 stainless steel external screws. Driver protected against voltage surges up to 10kV. PMMA lenses for LEDs. Screen made of 5mm thermal-shock resistant tempered glass. High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ-OS-150W	19500.0	130.0	Type II
			Type III
			Type IV
			Type IV Wide
			Type V Square Medium
			Type V Wide (Round)

3000/4000K CCT available on request

Finish color options :

 Textured Grey RAL 9006	 Anthracite Grey RAL7024	 Matt Black (on request)
 Bronze RAL8019		

Customizable in different finishing colors

Technical Features








Technical data

Wattage	150W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	5.5 Kg
Surge Protection	6 KV/10KV
Notes	Can on request DALI version available on request

Option



Photocell



Technical Features




Technical data

Wattage	200W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	SMD high-intensity power LEDs
Standard Deviation Color Matching	MacAdam step 3
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in or AC120-277V
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. neoprene power cable included
Gross weight	6.7 Kg
Surge Protection	6 KV/10KV
Notes	Can on request DALI version available on request

EZ-OS-200W

Die-cast aluminium body (EN 47100). Double layer polyester powder paint resistant to corrosion and salt spray fog. Silicone rubber gaskets. AISI 316 stainless steel external screws. Driver protected against voltage surges up to 10kV. PMMA lenses for LEDs. Screen made of 5mm thermal-shock resistant tempered glass. High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.



light source*	lumen output (lm)	lumin. efficacy (lm/w)	light beam options
5000°K white			
EZ-OS-200W	26000.0	130.0	Type II
			Type III
			Type IV
			Type IV Wide
			Type V Square Medium
			Type V Wide (Round)


3000/4000K CCT available on request

Finish color options :

Textured Grey RAL 9006	Anthracite Grey RAL7024	Matt Black (onrequest)
Bronze RAL8019		

Customizable in different finishing colors

Option



Photocell

